



RML-19 Series




Product features



Various Sizes



Excellent thermal management



High-performance LEDs



Various light colors



Residential Lighting

RML-19 Series

Applications

- Convention Center
- Hotels
- Boutiques
- Bussiness Center
- Museums
- Home
- Offices
- Hospitals
- Leisure Space. Etc



Part number system

$\frac{\text{RML-19}}{\text{X1}} - \frac{\text{PL}}{\text{X2}} \frac{\text{R}}{\text{X3}} - \frac{\text{24W}}{\text{X4}} - \frac{\text{30K}}{\text{X5}}$

X1=Series

X2=Product type

DL=Down light

SPL=Surface-Mount Downlight

PL=Panel light

X3=Shape

R=Round type

SQ=Square type

X4=Rate Power

6W=6 Watts

12W=12 Watts

18W=18 Watts

24W=24 Watts



X5=Color temperature

30K=3000K

40K=4000K

65K=6500K

Dimensions

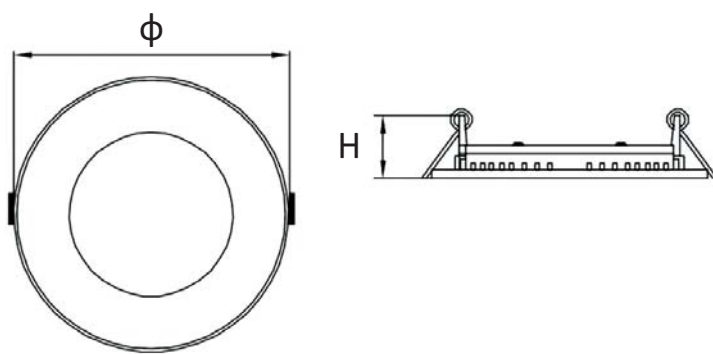

RML-19 Series

Specifications

Power factor:	≥0.9
Power-Supply Efficiency:	≥88%
Color rendering index:	RA≥75
Using Temperature:	-20°C - 50°C
View angle :	120 °

Rated Power	Part No.	Luminous Flux	Color of light	Color temperature	Current	Dimensions (φxH)	Hole dimension	size
6W	RML-19-PLR-6W-30K	430-470 Lm	Warm White	3000 K	300 mA/ 12-25 Vdc	φ126x25 mm.	φ110 mm.	4 inch
	RML-19-PLR-6W-40K		Neutral White	4000 K				
	RML-19-PLR-6W-65K		Daylight	6500 K				
9W	RML-19-PLR-9W-30K	680 Lm	Warm White	3000 K	300 mA/ 25-45 Vdc	φ146x25 mm.	φ136 mm.	5inch
	RML-19-PLR-9W-40K		Neutral White	4000 K				
	RML-19-PLR-9W-65K		Daylight	6500 K				
12W	RML-19-PLR-12W-30K	960 Lm	Warm White	3000 K	300 mA/ 22-45 Vdc	φ178x25 mm.	φ160 mm.	6 inch
	RML-19-PLR-12W-40K		Neutral White	4000 K				
	RML-19-PLR-12W-65K		Daylight	6500 K				
15W	RML-19-PLR-15W-30K	1160-1200 Lm	Warm White	3000 K	300 mA/ 40-60 Vdc	φ190x25 mm.	φ180 mm.	7 inch
	RML-19-PLR-15W-40K		Neutral White	4000 K				
	RML-19-PLR-15W-65K		Daylight	6500 K				
18W	RML-19-PLR-18W-30K	1580-1650 Lm	Warm White	3000 K	300 mA/ 45-80 Vdc	φ225x25 mm.	φ210 mm.	8 inch
	RML-19-PLR-18W-40K		Neutral White	4000 K				
	RML-19-PLR-18W-65K		Daylight	6500 K				
24W	RML-19-PLR-24W-30K	2000-2200 Lm	Warm White	3000 K	600 mA/ 35-45 Vdc	φ254x25 mm.	φ240 mm.	9.5 inch
	RML-19-PLR-24W-40K		Neutral White	4000 K				
	RML-19-PLR-24W-65K		Daylight	6500 K				
30W	RML-19-PLR-30W-30K	2400-2600 Lm	Warm White	3000 K	650 mA/ 35-55 Vdc	φ300x25 mm.	φ288 mm.	11 inch
	RML-19-PLR-30W-40K		Neutral White	4000 K				
	RML-19-PLR-30W-65K		Daylight	6500 K				