


RML-24 Series



Special features



Adjustable Angle



High-performance COB light source




Various light colors



Excellent thermal dissipation




Different light distributions



Various sizes

Applications

- Convention Center
- Hotels
- Boutiques
- Bussiness Center
- Museums
- Home
- Offices
- Hospitals
- Leisure Space. Etc

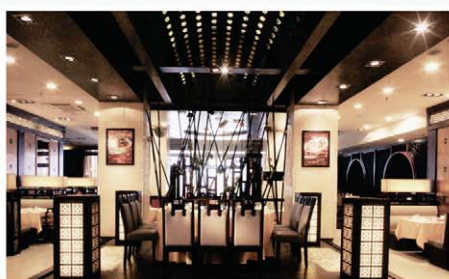

Part number system

RML-24 - C R 30 30 W - 15D
X1 X2 X3 X4 X5 X6 X7

X1=Series
X2=Type
X3= Shape
R=Round
S=Square

X4=Rated power
06=6 Watts
16=16 Watts
22= 22 Watts
30= 30 Watts


X5=Color temperature
30=3000 K
40=4000 K
57=5700 K

X7=View angle
15D= 15 °
24D= 24 °
35D= 35 °

X6=Shell color
W=White


RML-24 Series

Dimensions

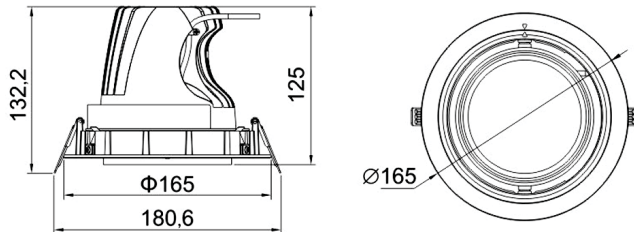

Dimensions: $\phi 165 \times 125$ mm.

Cut-Out: $\phi 150$ mm.



Specifications


Specifications RML-24 (30W)

Rated power	30 W
Current	800 mA/37 Vdc
Light source	Edison HM24
Optical system	$\phi 95$ Reflection cup+Len


Illuminance for different color

Product Part Number	Beam Angle	Color	Color Temperature	Luminous Flux
RML-24-CR3030W-15D	15 °	Warm White	3000 K	2282 Lm
RML-24-CR3040W-15D		Neutral White	4000 K	2355 Lm
RML-24-CR3057W-15D		Daylight	5700 K	2357 Lm
RML-24-CR3030W-24D	24 °	Warm White	3000 K	2172 Lm
RML-24-CR3040W-24D		Neutral White	4000 K	2241 Lm
RML-24-CR3057W-24D		Daylight	5700 K	2244 Lm
RML-24-CR3030W-35D	35 °	Warm White	3000 K	2170 Lm
RML-24-CR3040W-35D		Neutral White	4000 K	2240 Lm
RML-24-CR3057W-35D		Daylight	5700 K	2242 Lm


Light distribution curve




COB 3000K




EDISON COB 30W 2282.4lm




EDISON COB 30W 2172.3lm




EDISON COB 30W 2170.5lm




COB 4000K




EDISON COB 30W 2355.4lm




EDISON COB 30W 2241.8lm




EDISON COB 30W 2240lm




COB 5700K



EDISON COB 30W 2357.7lm



EDISON COB 30W 2244lm



EDISON COB 30W 2242.1lm