

RML-24 Series



Special features



Adjustable Angle



High-performance COB light source




Various light colors



Excellent thermal dissipation



Different light distributions



Various sizes

Applications

- Convention Center
- Hotels
- Boutiques
- Bussiness Center
- Museums
- Home
- Offices
- Hospitals
- Leisure Space. Etc



Part number system

RML-24 - C R 30 30 W - 15D
X1 X2 X3 X4 X5 X6 X7

X1=Series
X2=Type
X3= Shape
R=Round
S=Square

X4=Rated power
06=6 Watts
16=16 Watts
22= 22 Watts
30= 30 Watts


X5=Color temperature
30=3000 K
40=4000 K
57=5700 K

X7=View angle
15D= 15 °
24D= 24 °
35D= 35 °

X6=Shell color
W=White

RML-24 Series

Dimensions

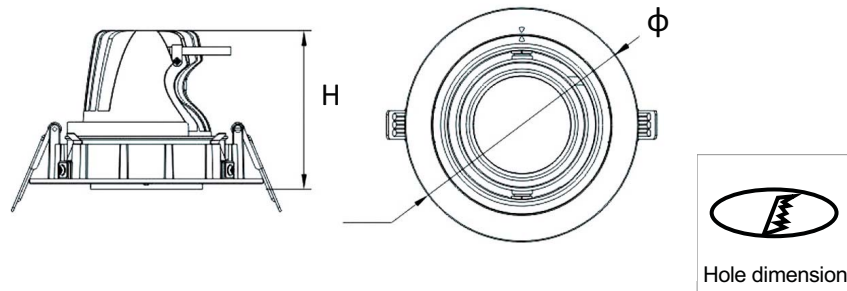

Specifications

Power factor:	≥0.9
Power-Supply Efficiency:	≥88%
Color rendering index:	RA≥75
Using Temperature:	-20°C - 50°C

Rated Power	Part No.	Luminous Flux	Color of light	Color temperature	View angle	Current	Dimensions (Φ×H)	Hole dimension	size
6W	RML-24-DR0630W-15D	443 Lm	Warm White	3000 K	15 °	600 mA/ 10 Vdc	Φ95x60 mm.	Φ80 mm.	3 inch
	RML-24-DR0640W-15D	461 Lm	Neutral White	4000 K					
	RML-24-DR0657W-15D	468 Lm	Daylight	5700 K					
	RML-24-DR0630W-24D	441 Lm	Warm White	3000 K	24 °				
	RML-24-DR0640W-24D	459 Lm	Neutral White	4000 K					
	RML-24-DR0657W-24D	465 Lm	Daylight	5700 K					
	RML-24-DR0630W-35D	438 Lm	Warm White	3000 K	35 °				
	RML-24-DR0640W-35D	455 Lm	Neutral White	4000 K					
	RML-24-DR0657W-35D	462 Lm	Daylight	5700 K					
16W	RML-24-AR1630W-15D	1391 Lm	Warm White	3000 K	15 °	450 mA/ 37 Vdc	Φ115x78 mm.	Φ100 mm.	4 inch
	RML-24-AR1640W-15D	1461 Lm	Neutral White	4000 K					
	RML-24-AR1657W-15D	1427 Lm	Daylight	5700 K					
	RML-24-AR1630W-24D	1418 Lm	Warm White	3000 K	24 °				
	RML-24-AR1640W-24D	1489 Lm	Neutral White	4000 K					
	RML-24-AR1657W-24D	1455 Lm	Daylight	5700 K					
	RML-24-AR1630W-35D	1383 Lm	Warm White	3000 K	35 °				
	RML-24-AR1640W-35D	1453 Lm	Neutral White	4000 K					
	RML-24-AR1657W-35D	1419 Lm	Daylight	5700 K					
22W	RML-24-BR2230W-15D	1696 Lm	Warm White	3000 K	15 °	600 mA/ 37 Vdc	Φ140x105 mm.	Φ125 mm.	5 inch
	RML-24-BR2240W-15D	1815 Lm	Neutral White	4000 K					
	RML-24-BR2257W-15D	1828 Lm	Daylight	5700 K					
	RML-24-BR2230W-24D	1724 Lm	Warm White	3000 K	24 °				
	RML-24-BR2240W-24D	1844 Lm	Neutral White	4000 K					
	RML-24-BR2257W-24D	1858 Lm	Daylight	5700 K					
	RML-24-BR2230W-35D	1652 Lm	Warm White	3000 K	35 °				
	RML-24-BR2240W-35D	1768 Lm	Neutral White	4000 K					
	RML-24-BR2257W-35D	1781 Lm	Daylight	5700 K					
30W	RML-24-CR3030W-15D	2282 Lm	Warm White	3000 K	15 °	800 mA/ 37 Vdc	Φ165x125 mm.	Φ150 mm.	5.5 inch
	RML-24-CR3040W-15D	2355 Lm	Neutral White	4000 K					
	RML-24-CR3057W-15D	2357 Lm	Daylight	5700 K					
	RML-24-CR3030W-24D	2172 Lm	Warm White	3000 K	24 °				
	RML-24-CR3040W-24D	2241 Lm	Neutral White	4000 K					
	RML-24-CR3057W-24D	2244 Lm	Daylight	5700 K					
	RML-24-CR3030W-35D	2170 Lm	Warm White	3000 K	35 °				
	RML-24-CR3040W-35D	2240 Lm	Neutral White	4000 K					
	RML-24-CR3057W-35D	2242 Lm	Daylight	5700 K					