



RML-27 Series



Special features



Adjustable Angle



High-performance COB light source




Various light colors



Excellent thermal dissipation



Different light distributions



Various sizes

Applications

- Convention Center
- Hotels
- Boutiques
- Bussiness Center
- Museums
- Home
- Offices
- Hospitals
- Leisure Space. Etc



RML-27 Series

Part number system

RML-27 - B R 06 30 W - 24D
X1 X2 X3 X4 X5 X6 X7

X1=Series
X2=Type
X3= Shape
R=Round
S=Square



X4=Rated power
03=3 Watts
06=6 Watts
09=9 Watts

X5=Color temperature
30=3000 K
40=4000 K
65=6500 K

X7=View angle
24D= 24 °


X6=Shell color
W=White

Dimensions

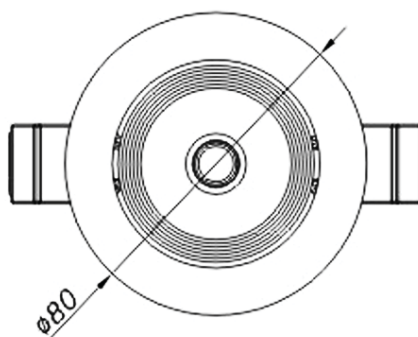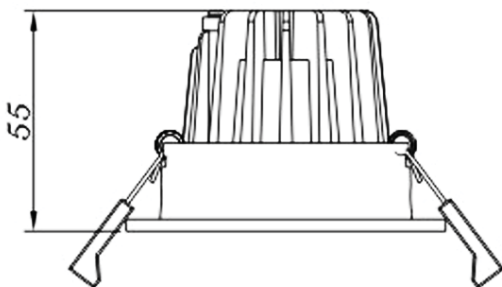

Dimensions: $\phi 80 \times 55$ mm.

Cut-Out: $\phi 70$ mm.



Specifications

Specifications RML-27 (6W)


Rated power	6 W
Current	300 mA/20 Vdc
Light source	Edison CM06
Optical system	$\phi 45$ Reflector

Illuminance for different color



Product Part Number	Beam Angle	Color	Color Temperature	Luminous Flux
RML-27-BR0630W	24 °	Warm White	3000 K	347 Lm
RML-27-BR0640W		Neutral White	4000 K	425 Lm
RML-27-BR0665W		Daylight	6500 K	428 Lm

RML-27 Series



Light distribution curve



COB 3000K

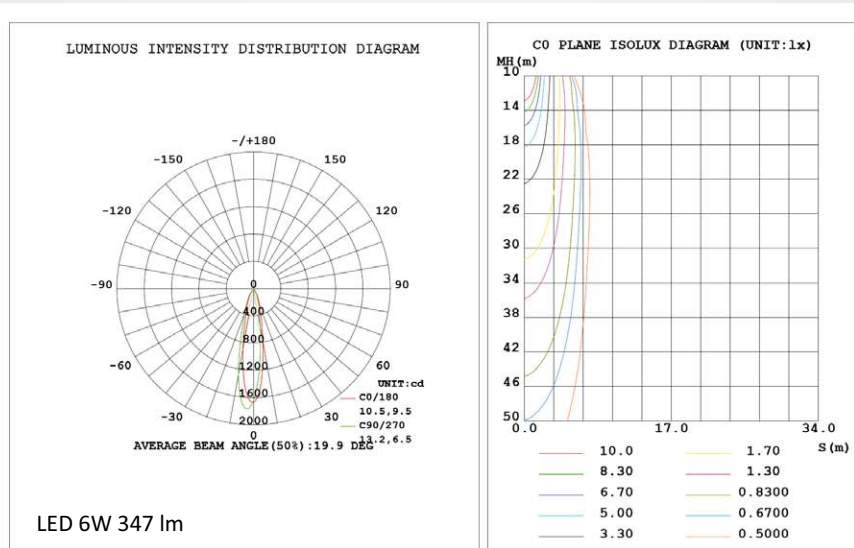

COB 4000K

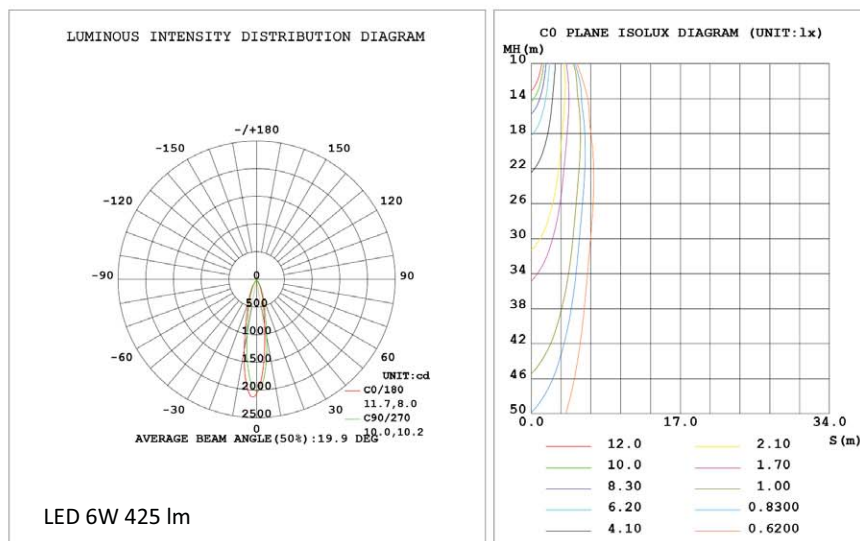

COB 6500K

