

RML-27 Series



Special features



Adjustable Angle



High-performance COB light source




Various light colors



Excellent thermal dissipation



Different light distributions



Various sizes

Applications

- Convention Center
- Hotels
- Boutiques
- Bussiness Center
- Museums
- Home
- Offices
- Hospitals
- Leisure Space. Etc



RML-27 Series

Part number system

RML-27 - $\frac{C}{X1}$ $\frac{R}{X2}$ $\frac{09}{X3}$ $\frac{30}{X4}$ $\frac{W}{X5}$ - $\frac{24D}{X7}$

X1=Series
X2=Type
X3= Shape
 R=Round
 S=Square



X4=Rated power
 03=3 Watts
 06=6 Watts
 09=9 Watts

X5=Color temperature
 30=3000 K
 40=4000 K
 65=6500 K

X7=View angle
 24D= 24 °


X6=Shell color
 W=White

Dimensions

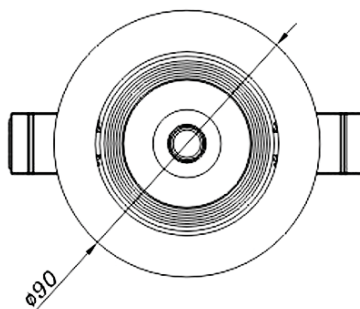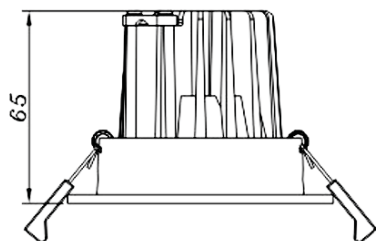

Dimensions: $\phi 90 \times 65$ mm.

Cut-Out: $\phi 80$ mm.



Specifications

Specifications RML-27 (9W)


Rated power	9 W
Current	300 mA/30 Vdc
Light source	Edison CM09
Optical system	$\phi 50$ Reflector

Illuminance for different color



Product Part Number	Beam Angle	Color	Color Temperature	Luminous Flux
RML-27-CR0930W	24 °	Warm White	3000 K	563 Lm
RML-27-CR0940W		Neutral White	4000 K	628 Lm
RML-27-CR0965W		Daylight	6500 K	653 Lm

RML-27 Series



Light distribution curve



COB 3000K

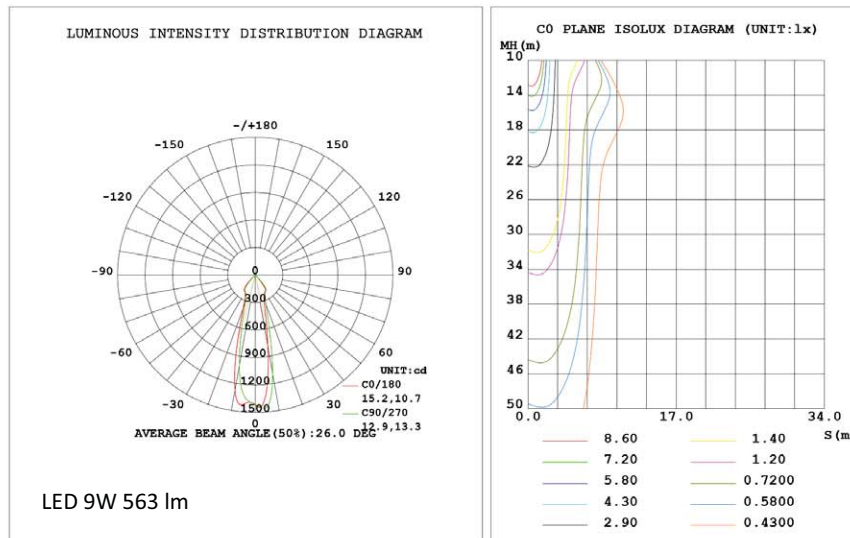

COB 4000K

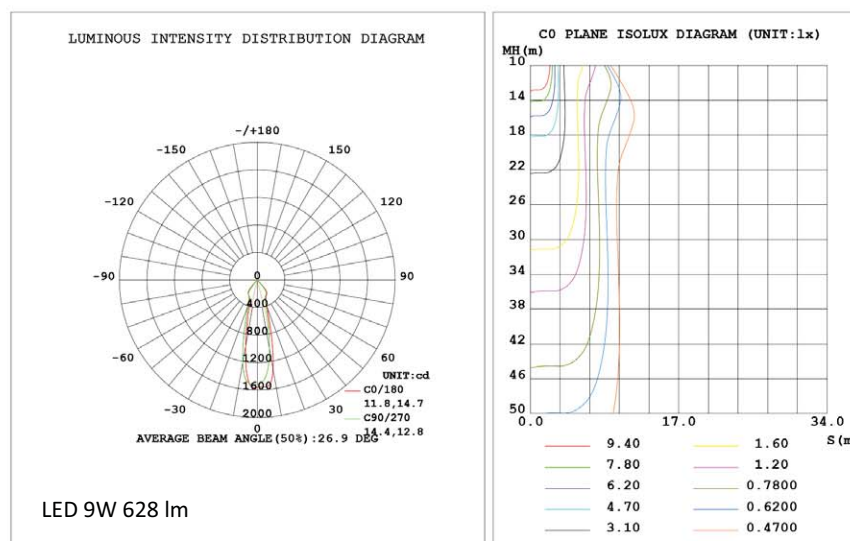

COB 6500K

