


RML-27 Series



Special features

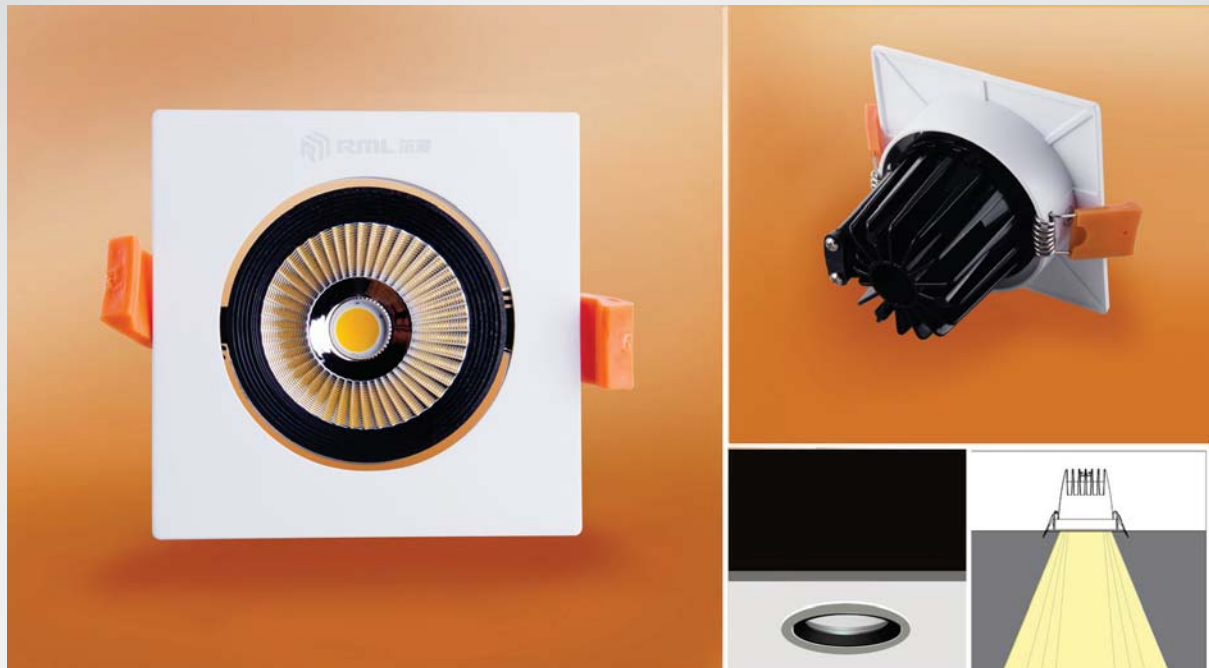

Adjustable Angle



High-performance COB light source




Various light colors



Excellent thermal dissipation



Different light distributions



Various sizes

Applications

- Convention Center
- Hotels
- Boutiques
- Bussiness Center
- Museums
- Home
- Offices
- Hospitals
- Leisure Space. Etc



RML-27 Series

Part number system

RML-27 - $\frac{C}{X1} \frac{S}{X2} \frac{09}{X3} \frac{30}{X4} \frac{W}{X5} - \frac{24D}{X7}$

X1=Series
X2=Type
X3= Shape
 R=Round
 S=Square


X4=Rated power
 03=3 Watts
 06=6 Watts
 09=9 Watts

X5=Color temperature
 30=3000 K
 40=4000 K
 65=6500 K

X7=View angle
 24D= 24 °

X6=Shell color
 W=White

Dimensions

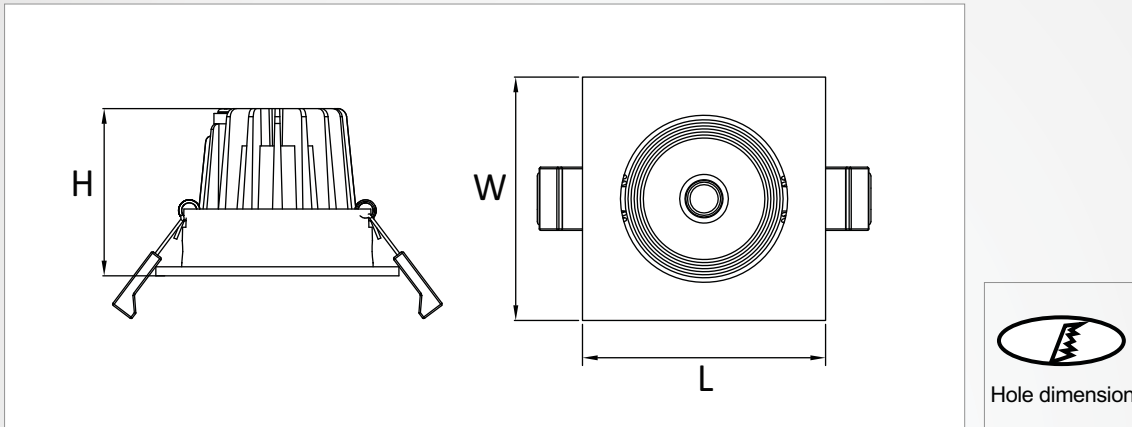

Specifications

Power factor:	≥0.5
Power-Supply Efficiency:	≥77%
Color rendering index:	RA≥80
Using Temperature:	-20°C - 50°C
View angle :	24 °

Rated Power	Part No.	Luminous Flux	Color of light	Color temperature	Current	Dimensions (WxLxH)	Hole dimension	size
6W	RML-27-BS0630W-24D	347 Lm	Warm White	3000 K	300 mA / 20 Vdc	80x80x55 mm.	70x70 mm.	2.5x2.5 inch
	RML-27-BS0640W-24D	425 Lm	Neutral White	4000 K				
	RML-27-BS0665W-24D	428 Lm	Daylight	6500 K				
9W	RML-27-CS0930W-24D	563 Lm	Warm White	3000 K	300 mA / 30 Vdc	90x90x65 mm.	80x80 mm.	3x3 inch
	RML-27-CS0940W-24D	628 Lm	Neutral White	4000 K				
	RML-27-CS0965W-24D	653 Lm	Daylight	6500 K				