
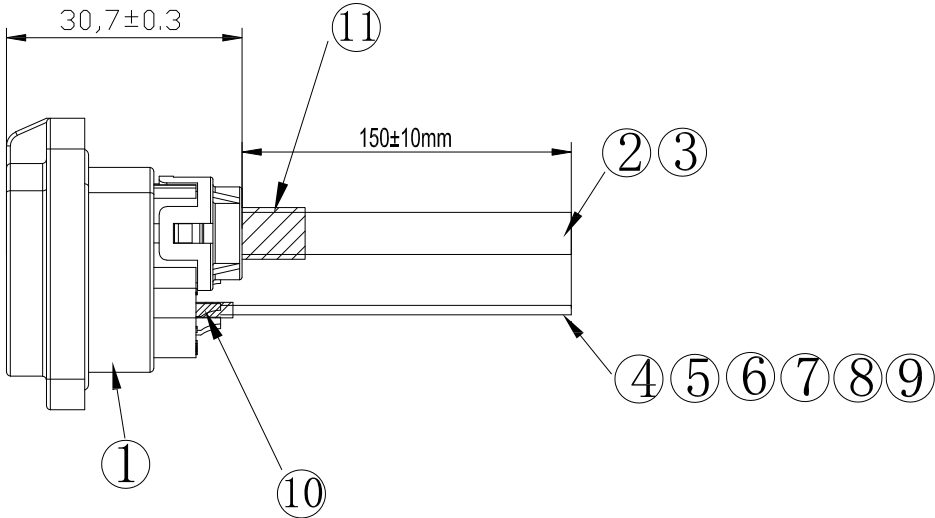


Transfer or duplication of this document is well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. All rights reserved for DEGSON and its subsidiaries. 未经授权，不得复制或传播本文件内容。未经书面授权，不得复制或传播本文件内容。保留所有权利。

技术要求/Technical requirements:	
额定电压/Rated Voltage/Current	72V /80A
绝缘电阻/Insulate Resistance	≥100MΩ
耐压/Withstanding Voltage	500V AC
防护等级/Ingress Protection	IP67
插拔寿命/Insertion/Pullout Times	3,000 Times
使用温度范围/Operating temperature(°C)	-40℃~+105℃
接线方式/Terminal	电源：压接；信号：焊接
导线外径范围/Wire range(mm)	/

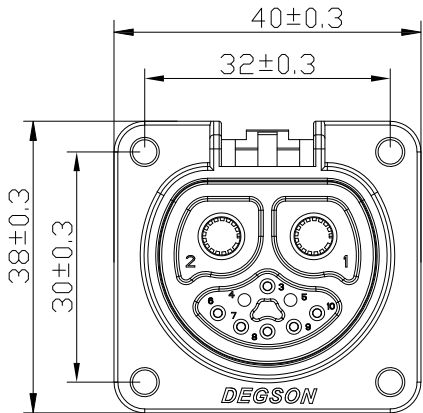

10	蓝色	22AWG
9	绿色	22AWG
8	黄色	22AWG
7	白色	22AWG
6	灰色	22AWG
5	胶壳堵孔	空
4	胶壳堵孔	空
3	橙色	22AWG
2	黑色	6AWG
1	红色	6AWG
Conn1	Colour	线材规格
Pin out		

11	8.0热缩管, 黑色		0.03m
10	2.0热缩管, 黑色		0.09m
9	UL1061, 22AWG, 蓝色		0.24m
8	UL1061, 22AWG, 绿色		0.24m
7	UL1061, 22AWG, 黄色		0.24m
6	UL1061, 22AWG, 白色		0.24m
5	UL1061, 22AWG, 灰色		0.24m
4	UL1061, 22AWG, 橙色		0.24m
3	UL1015, 6AWG, 黑色		0.24m
2	UL1015, 6AWG, 红色		0.24m
1	EBBH 2+6插座连接器		1PCS
序号	物料描述	物料料号	用量

		MATERIAL: 材质		SURFACE: 表面处理			
		MAT NO./REV: 25080000133		/ 版本		MAT STATUS: 物料状态	
APPD:			NAME				
CHKD:			SA-EBBH-2006-F-L150-03B(H)				
DRFT:	李鹏飞	2023-10-10	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
			图号	图纸类型	图纸状态	1:1	1/1

图纸版本	ECN	变更描述	设计人	设计日期
REV	ECN	DESCRIPTION	DRFT	DATE