

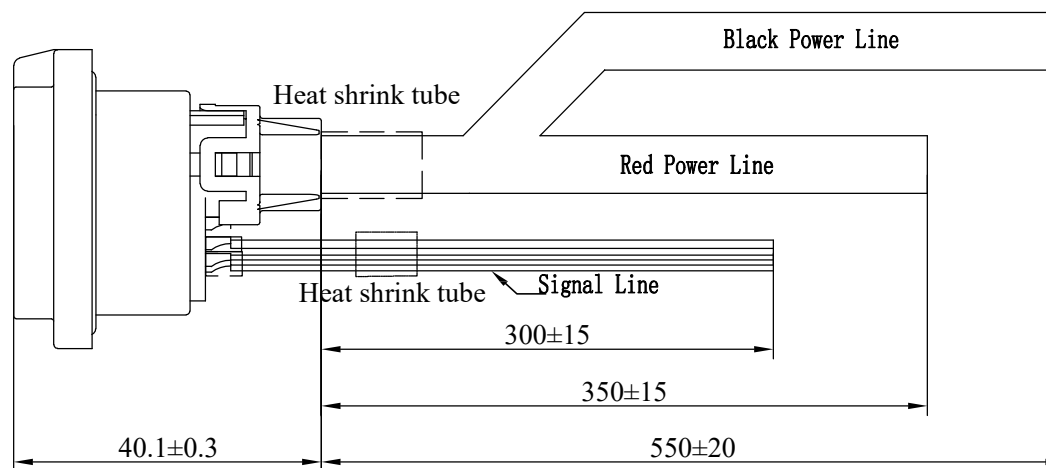


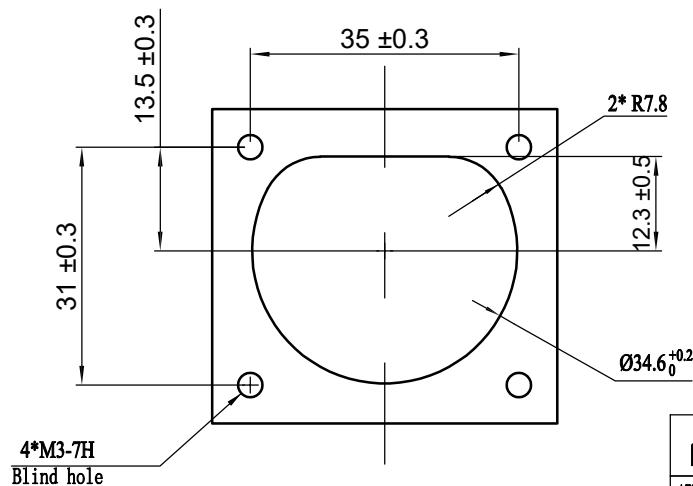

Technical requirements:	
Rated Voltage/Current	72V/120A
Insulate Resistance	≥500MΩ
Withstanding Voltage	Power 3500V AC,Signal 1500AC
Contact Resistance	Power ≤1mΩ,Signal ≤10mΩ
Ingress Protection	IP67(single)
Insertion/Pullout Times	3,000 Times
Operating temperature(°C)	-40℃→+105℃
Terminal	Soldering
Wire range(mm)	/

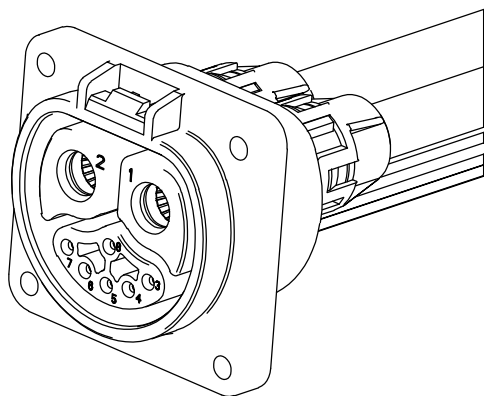

Wiring cable		
NO.	Color	Spec.
1	RED	Power line4AWG
2	BLACK	Power line4AWG
3	ORANGE	Signal line22AWG
4	BLUE	Signal line22AWG
5	GREEN	Signal line22AWG
6	GRAY	Signal line22AWG
7	YELLOW	Signal line22AWG
8	WHITE	Signal line22AWG

			MATERIAL:		SURFACE/COLOR:	
APPD:			MAT NO./REV: /		MAT STATUS:	
CHKD:			NAME SA-EBBH-2006-F-L550-00A(IH)			
DRFT: 靳鑫 2023. 10. 08						
			DRAWING NO.		TYPE	
					DRAWING STATUS work	
					SCALE 1:1	
					SHEET 1/1	

00					DRF: 靳鑫	2023. 10. 08	DRAWING NO.	TYPE	DRAWING STATUS work	SCALE 1:1	SHEET 1/1
REV	EQN	DESCRIPTION	DRFT	DATE	 A4	 mm inch					