


LED Recessed Light Series



Dimension

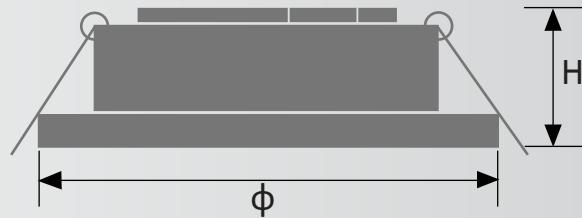

Specification

Power factor:	≥0.7
Power-Supply Efficiency:	≥90%
Color rendering index:	RA≥70
Using Temperature:	-20°C to 50°C

Rated Power	Part No.	Luminous Flux	Color of light	Color temperature	Angle	Current	Dimensions (φxH)	Hole dimension	Size
3W	SD1301A1-30K	240 Lm	Warm White	3000 K	30 °	300 mA/ 2-12Vdc	φ67x45 mm.	φ55 mm.	2 inch
	SD1301A1-60K	240 Lm	Cool White	6000 K					
5W	SD1501A2-30K	400 Lm	Warm White	3000 K	30 °	300 mA/ 8-20 Vdc	φ94x40 mm.	φ80 mm.	3 inch
	SD1501A2-60K	400 Lm	Cool White	6000 K					
12W	SD1021A1-30K	960 Lm	Warm White	3000 K	45 °	300 mA/ 19-45 Vdc	φ132x68 mm.	φ115 mm.	4.5 inch
	SD1021A1-60K	960 Lm	Cool White	6000 K					