
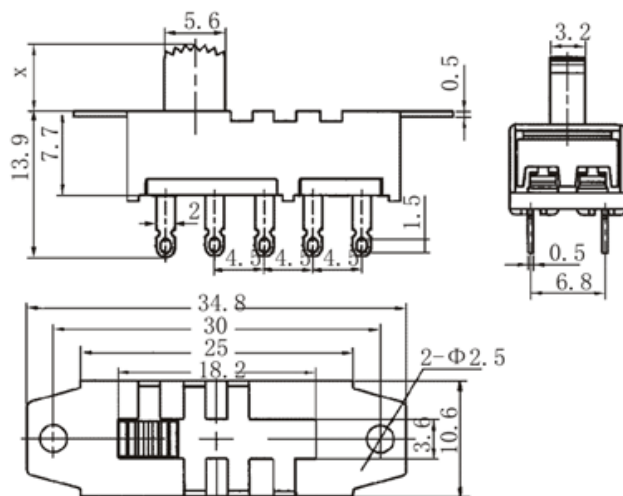



SS-24H08 (2P4T)

SS-24H09 (ΦM2.5螺孔)


Rating:

3A 250V AC

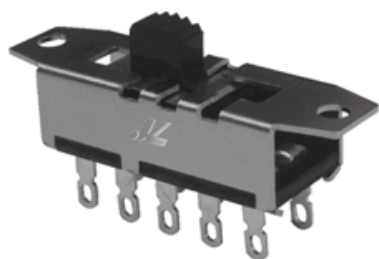

Code Explanation 型号说明

For Series:SS, SK, TS, PS, MS, MK

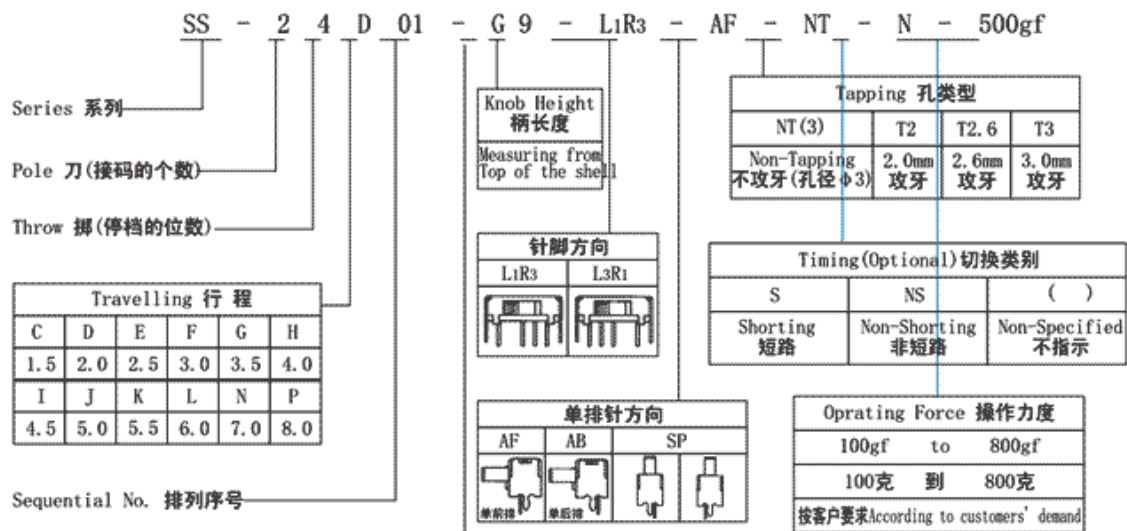

Knob Type 柄形						

General Specification 一般规格

For Series: SS, SK, MS, MK, TS, PS

Rating	使用功率	AS Per Individual Specification
Contact Resistance	接触电阻	50MΩ max.
Insulation Resistance	绝缘电阻	100MΩ at 500V DC
Withstand Voltage	抵抗电压	AC 500V For 1 minute
Operating Force	操作力	AS Per Individual Specification
Switching Life	使用寿命	10,000 Cycles Min.Unloading 15~18 Cycles Per Min.