



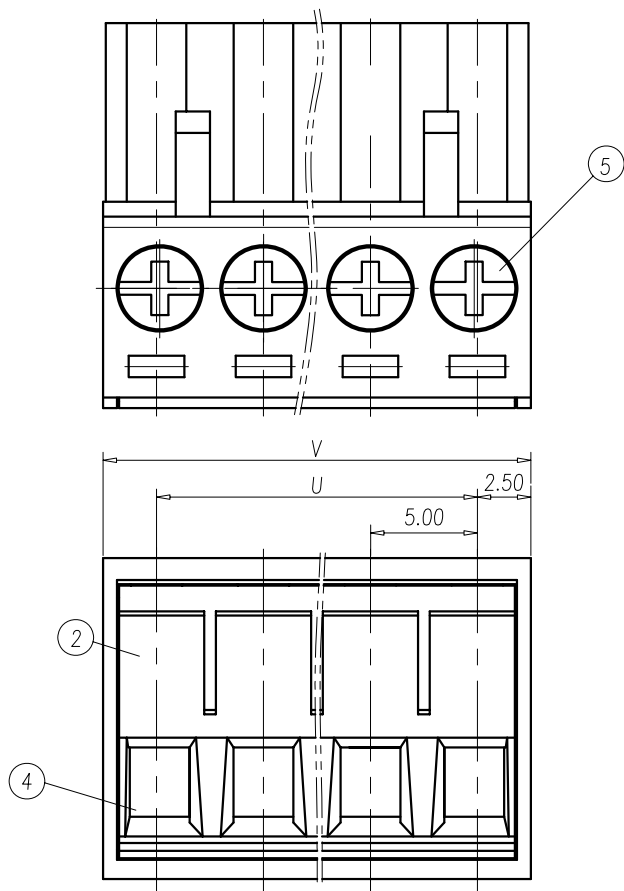

NOTES:

- 1. Rating: 300V 12A
PITCH: 5.00mm
- 2. Insulation Withstands Voltage:
AC 2000V at 1 minute
- 3. Insulation Resistance:
500MΩ or more at DC500V
- 4. Using Temperature Range:
-40°C~+105°C
- 5. Screw Torque Value: 0.5 N·m
- 6. Suitable Electric Wire:
AWG 28~12
- 7. RoHS Compliance

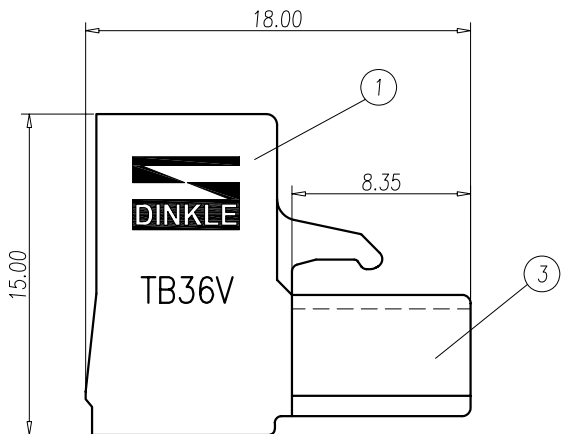

Normal Geometric Tolerancing					
—		//	≡	⊥	
0 to 100	0.3			0 to 10	0.3
over 100 to 150	0.4		0.4	over 10	0.4
over 150	0.6				
Normal dimension Tolerances					
0~10	±0.35				
over 10~30	±0.40				
over 30~53	±0.48				
over 53~70	±0.55				
over 70~90	±0.60				
over 90~115	±0.70				
over 115~150	±0.85				
over 150~200	±1.00				
over 200~250	±1.20				
over 250~320	±1.40				

P	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
U	5.00	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00	65.00	70.00	75.00
V	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00	65.00	70.00	75.00	80.00
P	17	18	19	20	21	22	23	24							
U	80.00	85.00	90.00	95.00	100.00	105.00	110.00	115.00							
V	85.00	90.00	95.00	100.00	105.00	110.00	115.00	120.00							

5	SCREW	STEEL	M2.5 Zn Plated
4	WIRE CAGE	STEEL	Zn Plated
3	CLAMP	COPPER ALLOY	Tin Plated
2	COVER	PA66	UL94-V0 GREEN
1	HOUSING	PA66	UL94-V0 GREEN
ITEM	NAME OF PART	MATERIAL	NOTES

DWG.	MT.FU	DATE	12.11.29	UNITS	MM	SHEET/OF	1 / 1
CHK.		DATE		SCALE	4:1 (:)		
APP.		DATE		NAME	TB36V-XXP		
 DINKLE ENTERPRISE CO.,LTD				DWG NO.	SP-03-TB36V000		

2			
REV.	CONTENT	CHK.	DATE