

15W isolated DC-DC converter in DIP package,  
Wide input and regulated single output



Patent Protection



## FEATURES

- Wide 2:1 input voltage range
- High efficiency up to 91%
- I/O isolation test voltage 1.5k VDC
- Input under-voltage protection, output short-circuit, over-current, over-voltage protection
- Operating ambient temperature range: -40°C to +105°C
- Meets CISPR32/EN55032 CLASS A, without extra components
- Industry standard pin-out
- EN62368 approved

*VRB\_YMD-15WR3 series of Isolated DC-DC converter products feature an wide 2:1 input voltage with efficiency of up to 91%, 1500VDC input to output isolation, an operating ambient temperature range of -40°C to +105°C, input under-voltage protection, output over-voltage, over-current, short circuit protection, CISPR32/EN55032 CLASS A EMI compliant without external components, which makes them widely used in industrial control, electric power, instruments and communications applications.*

## Selection Guide

Certification	Part No.	Input Voltage (VDC)		Output		Full Load Efficiency <sup>(2)</sup> (%) Min./Typ.	Max. Capacitive Load(μF)
		Nominal (Range)	Max. <sup>(1)</sup>	Voltage (VDC)	Current(mA) Max./Min.		
CE	VRB1203YMD-15WR3	12 (9-18)	20	3.3	4000/0	86/88	4700
	VRB1205YMD-15WR3			5	3000/0	88/90	4700
	VRB1212YMD-15WR3			12	1250/0	88/90	1000
	VRB1215YMD-15WR3			15	1000/0	89/91	820
	VRB1224YMD-15WR3			24	625/0	89/91	270
	VRB2403YMD-15WR3	24 (18-36)	40	3.3	4000/0	86/88	4700
	VRB2405YMD-15WR3			5	3000/0	88/90	4700
	VRB2412YMD-15WR3			12	1250/0	88/90	1000
	VRB2415YMD-15WR3			15	1000/0	89/91	820
	VRB2424YMD-15WR3			24	625/0	89/91	270
CE	VRB4803YMD-15WR3	48 (36-75)	80	3.3	4000/0	86/88	4700
	VRB4805YMD-15WR3			5	3000/0	88/90	4700
	VRB4812YMD-15WR3			12	1250/0	89/91	1000
	VRB4815YMD-15WR3			15	1000/0	89/91	820
	VRB4824YMD-15WR3			24	625/0	89/91	270

Notes:

- ① Exceeding the maximum input voltage may cause permanent damage;
- ② Efficiency is measured at nominal input voltage and rated output load.

## Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	12VDC nominal input series, nominal input voltage	3.3V output	--	1250/40	1280/65
		5V output	--	1389/40	1421/65
		12V output	--	1389/7	1421/22
		15V output	--	1374/7	1405/22
		24V output	--	1374/12	1405/22
	24VDC nominal input series, nominal input voltage	3.3V output	--	625/30	647/50
		5V output	--	695/30	711/50
		12V output	--	695/6	711/15
					mA

Input Current (full load / no-load)	24VDC nominal input series, nominal input voltage	15V output	--	687/6	703/15	mA
		24V output	--	687/10	703/20	
	48VDC nominal input series, nominal input voltage	3.3V output	--	313/15	320/30	
		5V output	--	348/15	356/30	
		12V output	--	344/3	352/11	
		15V output	--	344/3	352/11	
		24V output	--	344/4	352/11	
Reflected Ripple Current	Nominal input voltage	--	30	--	--	
Surge Voltage (1sec. max.)	12VDC nominal input series	-0.7	--	25	--	VDC
	24VDC nominal input series	-0.7	--	50	--	
	48VDC nominal input series	-0.7	--	100	--	
Start-up Voltage	12VDC nominal input series	--	--	9	--	
	24VDC nominal input series	--	--	18	--	
	48VDC nominal input series	--	--	36	--	
Under-voltage Protection	12VDC nominal input series	5.5	6.5	--	--	
Ctrl*	24VDC nominal input series	12	15.5	--	--	
	48VDC nominal input series	26	30	--	--	
Start-up Time	Nominal input voltage & constant resistance load	--	10	--	--	ms
Input Filter				PI filter		
Hot Plug				Unavailable		
Ctrl*	Module on			Ctrl pin open or pulled high (TTL 3.5-12VDC)		
	Module off			Ctrl pin pulled low to GND (0-1.2VDC)		
	Input current when off	--	2	7	--	mA

Note: \*The Ctrl pin voltage is referenced to input GND.

### Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Voltage Accuracy	0%-100% load		--	±1	±3	%
Linear Regulation	Input voltage variation from low to high at full load		--	±0.2	±0.5	
Load Regulation	5%-100% load		--	±0.5	±1	
Transient Recovery Time	25% load step change, nominal input voltage	--	300	500	500	μs
Transient Response Deviation		3.3V, 5V output	--	±3	±7	%
Others		--	±3	±5	--	
Temperature Coefficient	Full load	--	--	--	±0.03	%/°C
Ripple & Noise*	20MHz bandwidth, 5%-100% load	--	50	100	100	mV p-p
Trim	Input voltage range	90	--	110	110	%Vo
Over-voltage Protection		110	--	160	160	
Over-current Protection		110	150	190	190	%Io
Short-circuit protection					Hiccup, continuous, self-recovery	

Note: \* Ripple & Noise at < 5% load is 5%Vo max. The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.

### General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output Electric Strength Test for 1 minute with a leakage current of 1mA max.	1500	--	--	VDC
	Input/output-case Electric Strength Test for 1 minute with a leakage current of 1mA max.	1000	--	--	
Insulation Resistance	Input-output resistance at 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-output capacitance at 100KHz/0.1V	--	2000	--	pF

Operating Temperature	See Fig. 1	3.3V, 5V output	-40	--	+95	°C
		Others	-40	--	+105	
Storage Temperature			-55	--	+125	
Storage Humidity	Non-condensing		5	--	95	%RH
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds		--	--	+300	°C
Vibration			10-150Hz, 5G, 0.75mm. along X, Y and Z			
Switching Frequency*	PWM mode	3.3V, 5V output	--	300	--	KHz
		Others	--	270	--	
MTBF	MIL-HDBK-217F@25°C		1000	--	--	K hours

Note.\* Switching frequency is measured at full load. The module reduces the switching frequency for light load (below 50%) efficiency improvement.

## Mechanical Specifications

Case Material	Aluminum alloy
Dimensions	25.40 × 25.40 × 11.70 mm
Weight	15.0g (Typ.)
Cooling method	Free air convection

## Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS A (without external components)/ CLASS B (see Fig.3-② for recommended circuit)	
	RE	CISPR32/EN55032	CLASS A (without external components)/ CLASS B (see Fig.3-② for recommended circuit)	
Immunity	ESD	IEC/EN61000-4-2	Contact ±6KV, Air ±8KV	perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	±2KV (see Fig.3-① for recommended circuit)	perf. Criteria A
	Surge	IEC/EN61000-4-5	line to line ±2KV (see Fig.3-①for recommended circuit)	perf. Criteria B
	CS	IEC/EN61000-4-6	3 Vr.m.s	perf. Criteria A

## Typical Characteristic Curve








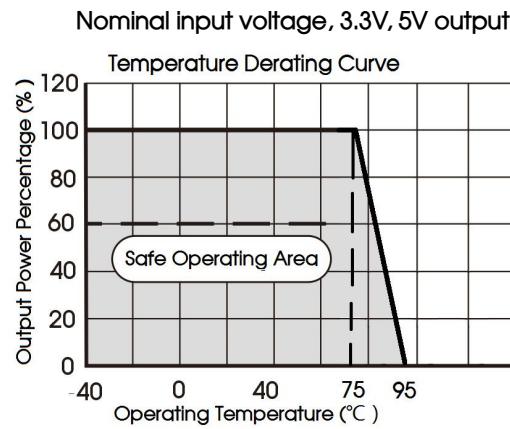



Fig. 1

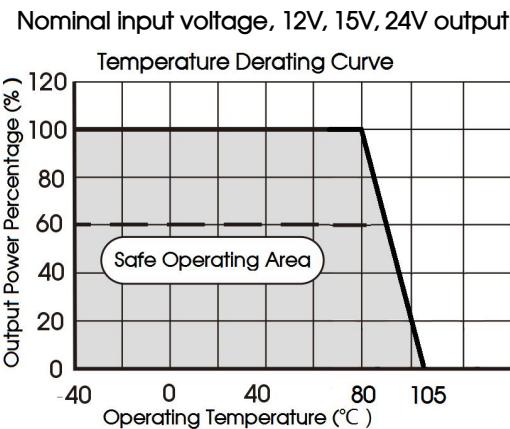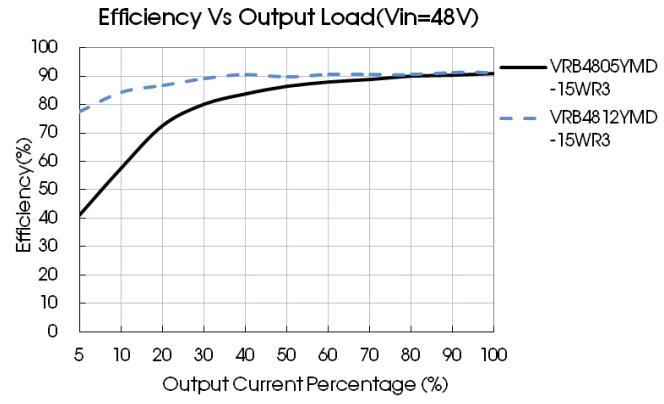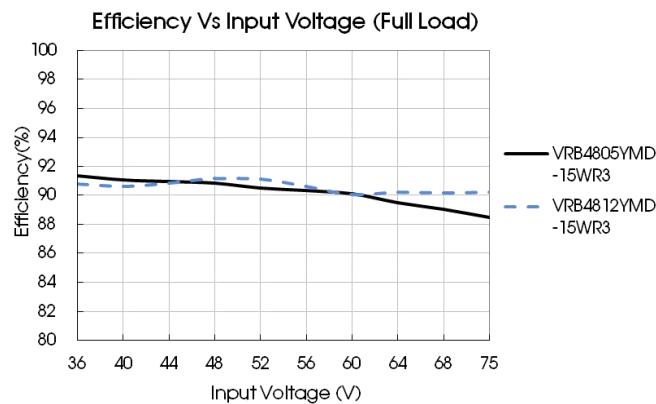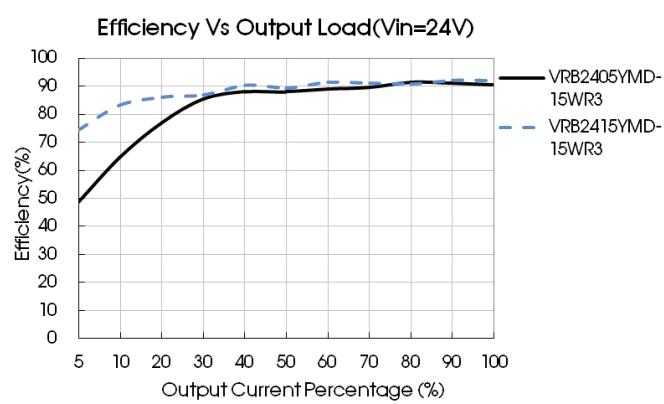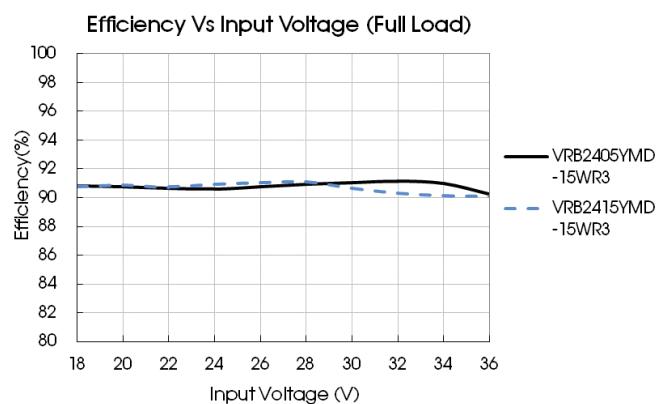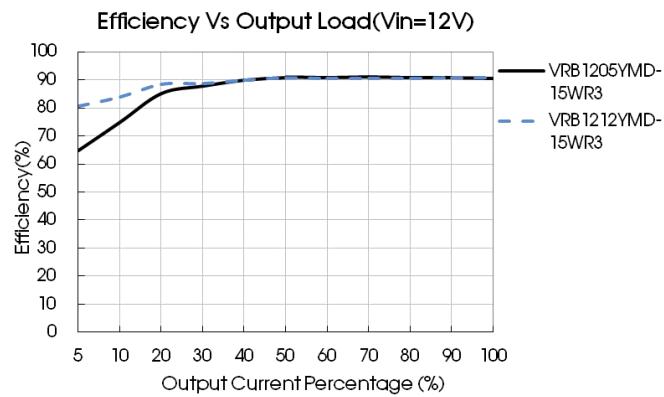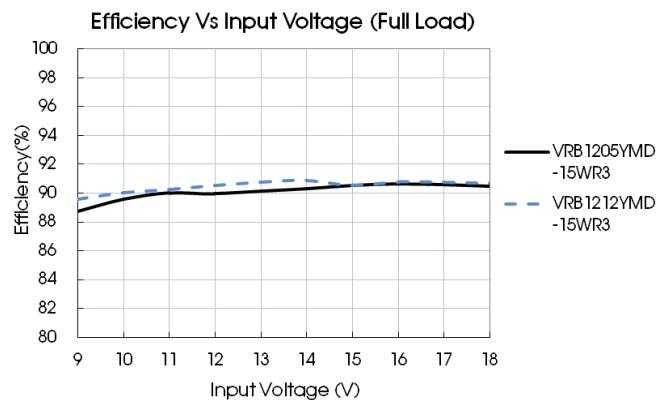

## Design Reference

### 1. Typical application

All DC-DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 2. Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values  $C_{in}$  and  $C_{out}$  and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the specified max. capacitive load value of the product.

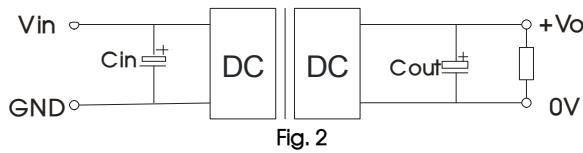

Vout (VDC)	$C_{in}$ ( $\mu$ F)	$C_{out}$ ( $\mu$ F)
3.3/5/12/15	100	100
24	100	47

## 2. EMC compliance circuit

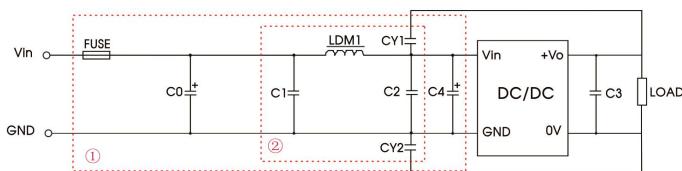



Fig. 3

Notes: For EMC tests we use Part ① in Fig. 3 for immunity and part ② for emissions test. Selecting based on needs.

## Parameter description:

Model	Vin: 12V, 24V	Vin:48V
FUSE	Select fuse value according to actual input current	
C0, C4	330μF/50V	330μF/100V
C1, C2	4.7μF/50V	4.7μF/100V
C3	Refer to the Cout in Fig.2	
LDM1	2.2μH/4A	2.2μH/2A
CY1/CY2	1nF/2KV	

## 3. Trim Function for Output Voltage Adjustment (open if unused)

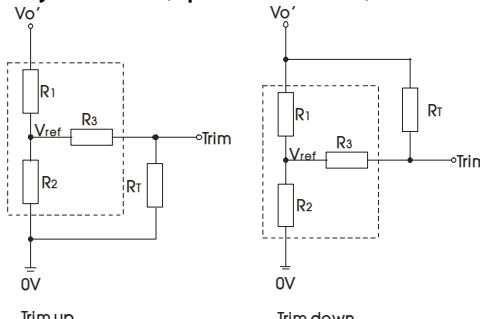

TRIM resistor connection (dashed line shows internal resistor network)

### Calculating Trim resistor values:

$$\begin{array}{ll} \text{up: } R_T = \frac{\alpha R_2}{R_2 - \alpha} - R_3 & \alpha = \frac{V_{ref}}{V_{o'} - V_{ref}} \cdot R_1 \\ \text{down: } R_T = \frac{\alpha R_1}{R_1 - \alpha} - R_3 & \alpha = \frac{V_{o'} - V_{ref}}{V_{ref}} \cdot R_2 \end{array}$$


$R_T$  = Trim Resistor value;  
 $\alpha$  = self-defined parameter;  
 $V_{o'}$  = desired output voltage

Vout(V)	R1(KΩ)	R2(KΩ)	R3(KΩ)	Vref(V)
3.3	4.801	2.87	15	1.24
5	2.894	2.87	10	2.5
12	11.000	2.87	17.4	2.5
15	14.494	2.87	17.4	2.5
24	24.872	2.87	20	2.5

## 4. The products do not support parallel connection of their output

## 5. For additional information please refer to DC-DC converter application notes on [www.mornsun-power.com](http://www.mornsun-power.com)

Dimensions and Recommended Layout

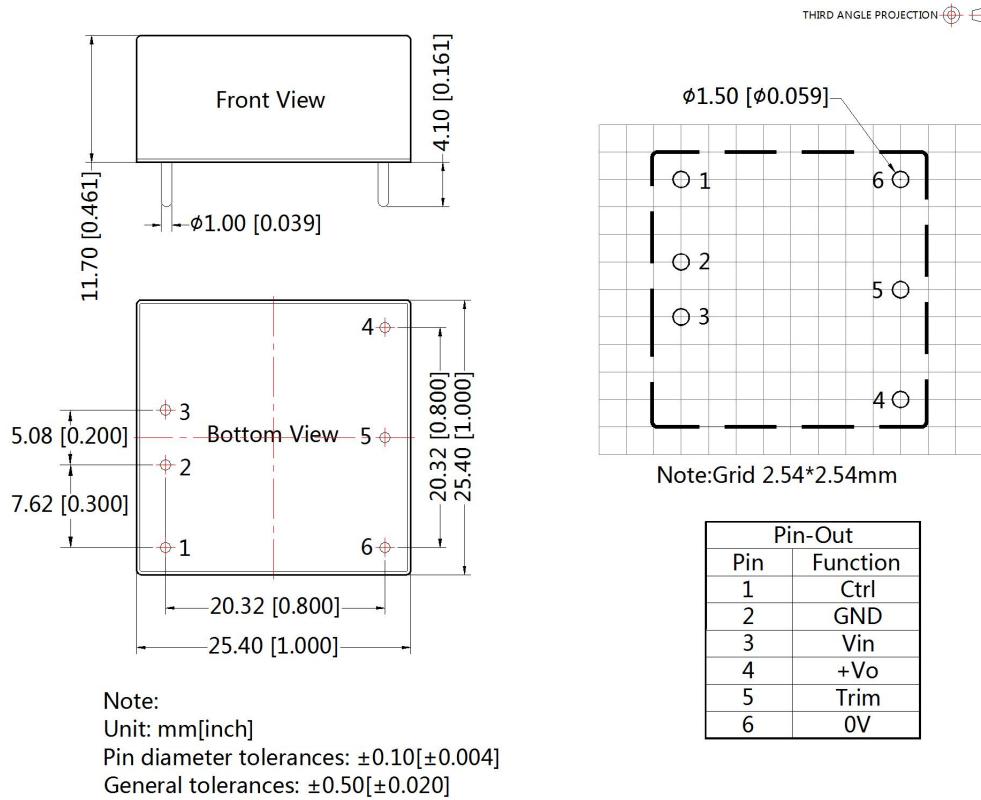

- Note:**
- For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). Packaging bag number : 58210003 (DIP);
  - If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
  - The maximum capacitive load offered were tested at input voltage range and full load;
  - Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^\circ\text{C}$ , humidity<75%RH with nominal input voltage and rated output load;
  - All index testing methods in this datasheet are based on company corporate standards;
  - We can provide product customization service, please contact our technicians directly for specific information;
  - Products are related to laws and regulations: see "Features" and "EMC";
  - Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

**Mornsun Guangzhou Science & Technology Co., Ltd.**

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China  
Tel: 86-20-38601850      Fax: 86-20-38601272      E-mail: [info@mornsun.cn](mailto:info@mornsun.cn)      [www.mornsun-power.com](http://www.mornsun-power.com)