

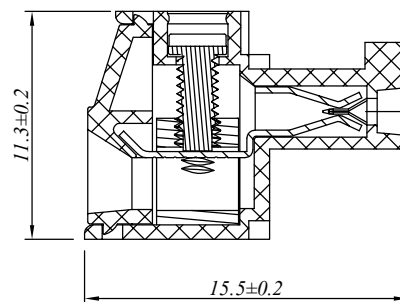


<i>SIGN</i>	<i>DATE</i>	<i>DESCRIPTION</i>	<i>APPROVER</i>
			
			
			

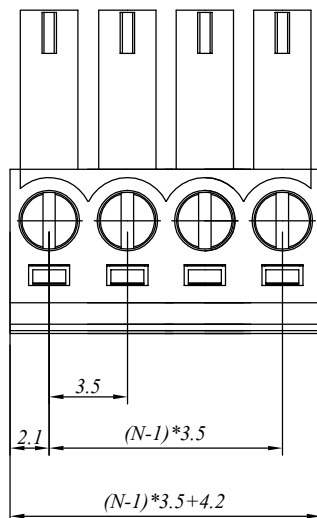

N =Number of contacts

材质于电镀/*Material*

塑件/Insulator body:	PA66, UL94V-0
方块/Contact(metal housing):	Brass ,Ni planted
螺丝/Terminal screw:	M2.0, Steel Zn planted
夹子/Clamp:	Phosphor bronze, Ni planted

电器性能/*Electrical*

参考标准/Standard:	UL	IEC
额定电压/Rated voltage:	300V	250V
额定电流/Rated current:	8A	10A
接触电阻/Contact resistance:	20m Ω (max)	
绝缘电阻/Insulation resistance:	500M Ω /500V	
耐电压/Withstanding voltage:	AC 2000V/1Min	
使用线径/Wire range:	16-28AWG, 1.5mm ²	

机械性能/*Mechanical*

扭矩/Torque:	0.2Nm(1.7Lb.in)
温度范围/Temperature range:	-40°C to +105°C
剥线长度/Steip length:	6-7mm
瞬间温度/Max soldering:	+250°C, for 5 Sec

尺寸/Dimensions

间距/*Pitch*: 3.5mm
极数/*Poles*: 2-24P

慈溪万海电子有限公司
CIXI WANHAI ELECTRONICS CO., LTD.

PART NAME: 15EDGK-3.50-XXP				TITLE:		
PART NO.:				DWG NAME:		
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY	CUSTOM NO.:		Tolerance
					UNITS:mm	X. ±0.50
					SCALE:4/1	X.X ±0.30
					REVISION:1	X.XX ±0.10
						X° ±1°