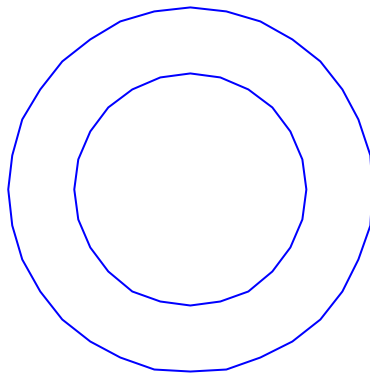


QMFZ2 Component - Plastics

Wednesday, September 15, 2004

E41938

E I DUPONT DE NEMOURS & CO INC

ENGINEERING POLYMERS CHESTNUT RUN PLAZA PO BOX 80713 WILMINGTON DE 19880

Material Designation: **101(+)(f1), 101F(+)(f1), 101L(+)(f1), E101(+)(f1), E101L(f1), 132F(+)(f1), 135F(+)(f1)**

Product Description: Polyamide 66 (PA66), designated "Zytel" furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	0.71	V-2	4	0	130	75	85	725	960
	1.5	V-2	3	0	130	75	85	750	960
	3.0	V-2	2	0	130	75	85	800	960
	6.0	V-2	2	0	130	75	85	800	960

CTI: 0 IEC CTI: - HVTR: 0 D495: 6 IEC Ball Pressure (°C): -

Dielectric Strength (kV/mm): 13

ISO Tensile Strength (MPa): -

ISO Tensile Impact (kJ/m²): -

Volume Resistivity (10⁹ohm-cm): 14

ISO Flexural Strength (MPa): -

ISO Izod Impact (kJ/m²): -

Dimensional Stability(%): -

ISO Heat Deflection (°C): -

ISO Charpy Impact (kJ/m²): -

©ROHS compliant



DRAW NO. PGAS013516

GJS

TOLERANCE:

L≤10	±0.2
10<L≤30	±0.3
30<L≤50	±0.5
50<L≤100	±0.7
100<L≤250	±1.2
ABOVE 250	±1.5

APPROVED BY

Joly

2010.02.02.

REVIEWED BY

Paggi

2010.02.02.

DRAWN BY

Jamin

2010.02.02.

MATERIAL: N66 V2 or EQUIVALENT

COLOR: NATURAL

PART NAME:

華 司
WASHER

PART NO:

WS-9A-N2W

A

SIZE

VERSION

1

SHEET 1 OF 1

UNIT	SCALE
mm	

EF0404505



品固企業股份有限公司
品基電子(東莞)有限公司
蘇州品基電子科技有限公司
鑽隆有限公司
PINGOOD ENTERPRISE CO.,LTD.