

#### 15W, AC-DC converter



## FEATURES

- Ultra-wide 85 305VAC and 100 430VDC input voltage range
- Operating ambient temperature range: -40°C to +85°C
- Up to 86% efficiency
- No-load power consumption < 0.1W
- 5000m altitude application
- Over-voltage category OVC III (meet EN61558)
- EMI performance meets CISPR32/EN55032 CLASS B, EN55014

LD 15-23BxxR2 series AC-DC converters is one of Mornsun's new generation compact size power converter. It features ultra-wide AC input and at the same time accepts DC input voltage, low power consumption, low ripple & noise, high efficiency, high reliability, reinforced isolation. It offers good EMC performance compliant to IEC/EN61000-4 and CISPR32/EN55032 and meets IEC/EN/UL62368/EN60335/ EN61558/IEC/EN60601-1/ANSI/AAMI ES60601-1 standards. The converters are widely used in industrial, power, medical treatment, home appliances, instrumentation, communication and civil applications. For extremely harsh EMC environment, we recommend using the application circuit show in Design Reference of this datasheet.

Selection Guide						
Certification	Part No.*	Output Power	Nominal Output Voltage and Current	Efficiency at 230VAC (%) Typ.	Capacitive Load (uF) Max.	
	LD15-23B03R2	13.2W	3.3V/4000mA	82	6600	
UL/EN/IEC	LD15-23B05R2	15W	5V/3000mA	85	5000	
	LD15-23B09R2		9V/1670mA	84	3000	
	LD15-23B12R2		12V/1250mA	85	2000	
	LD15-23B15R2		15V/1000mA	85	1500	
-	LD15-23B24R2		24V/625mA	86	680	

Note: \* Use suffix "A2S" for chassis and suffix "A4S" for DIN-Rail mounting.

Input Specification	S				
Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltago Dango	AC input	85		305	VAC
Input Voltage Range	DC input	100		430	VDC
Input Frequency		47		63	Hz
Input Current	115VAC			0.45	A
	230VAC			0.30	
Inrush Current	115VAC		30		
	230VAC		60		
Leakage Current	277VAC/50Hz		0.1mA RMS Max.		
Built In Fuse			2A/300V, slow-blow		
Hot Plug			Unavailable		

Output Specifications					
Item	Operating Conditions	Min.	Тур.	Max.	Unit
Output Voltage Accuracy			±2		
Line Regulation	Full load		±0.5		%
Load Regulation	0%-100% load		±l		
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)		70	120	mV

**MORNSUN®** 

MORNSUN Guangzhou Science & Technology Co., Ltd.

## AC/DC Converter LD15-23BxxR2 Series

# MORNSUN®

Stand-by Power Consumption	230VAC	3.3/5/9/12/15V			0.10		
		24V			0.12	W	
Temperature Coefficient		· · · · · · · · · · · · · · · · · · ·		±0.02		%/°C	
Short Circuit Protection			Hico	Hiccup, continuous, self-recovery			
Over-current Protection			≥110%lo, self-recovery				
	3.3/5V		<7.5VDC	$\leqslant$ 7.5VDC (Output voltage clamp or hiccup )			
	9 V		≤15VDC (	$\leq$ 15VDC (Output voltage clamp or hiccup )			
Over-voltage Protection	12/15V		≤20VDC (	$\leqslant$ 20VDC (Output voltage clamp or hiccup )			
	24V		≤30VDC (	Output volta	ige clamp or	hiccup )	
Minimum Load			0			%	
	115VAC			10			
Hold-up Time	230VAC			55		ms	

Note: \*The "Tip and barrel method" is used for ripple and noise test, output parallel 10uF electrolytic capacitor and 1uF ceramic capacitor, please refer to AC-DC Converter Application Notes for specific information.

General S	pecifications						
Item		Operating Conditions		Min.	Тур.	Max.	Unit
Isolation	Input-output	Electric Strength Test fo	r 1min., leakage current <5mA	4000			VAC
Insulation Resistance	Input - output	At 500VDC		100			MΩ
Operating Tem	perature			-40		+85	°C
Storage Tempe	ərature			-40		+85	C
Storage Humid	lity					95	%RH
O a lata da ar Tanan	<b>k</b>	Wave-soldering		260 ± 5℃; time: 5 - 10s			
Soldering Temperature		Manual-welding		360 ± 10°C; time: 3 - 5s			
Switching Frequ	uency				65		kHz
		<b>+50</b> ℃ to +70℃	3.3/5V	3.00			
		<b>+55</b> ℃ to +70℃	9/12/15/24V	2.67			%/°C
		+70℃ to +85℃		0.66			
Power Derating	3	85VAC - 100VAC		1.33			0/ \ /A C
		277VAC - 305VAC		0.71			%/VAC
		2000 - 5000m		6.7			%/Km
Safety Standard				Approval 8	k EN62368-1 (	3-1, EN60335- (Report); 0601-1/ANSI/	
Safety Class				CLASSII			
MTBF				MIL-HDBK-2	217F@25°C >	3,200,000 h	
Designed Life		230VAC	Ta: 25°C 100% load	>130x10 <sup>3</sup> k	า		
			Ta: 55°C 100% load	>27x10 <sup>3</sup> h			

Mechan	Mechanical Specifications				
Case Materia	l	Black plastic, flame-retardant and heat-resistant (UL94V-0)			
	DIP package	47.60 x 26.80 x 23.50 mm			
Dimension	A2S chassis mounting	76.00 x 31.50 x 32.30 mm			
	A4S Din-Rail mounting	76.00 x 31.50 x 36.90 mm			
	DIP	48g (Тур.)			
Weight	A2S chassis mounting	68g (Тур.)			
	A4S Din-Rail mounting	88g (Тур.)			
Cooling meth	nod	Free air convection			

**MORNSUN**<sup>®</sup>

MORNSUN Guangzhou Science & Technology Co., Ltd.

2021.08.13-A/4 Page 2 of 6

## AC/DC Converter


## LD15-23BxxR2 Series

## **MORNSUN**<sup>®</sup>

Electron	nagnetic Compatibility	(EMC)		
		CISPR32/EN55032	CLASS B	
	05	CISPR32/EN55032	CLASS B (See Fig.3 for recommended circuit)	
	CE	CISPR11/EN55011	CLASS B	
		EN55014-1		
Emissions		CISPR32/EN55032	CLASS B	
		CISPR32/EN55032	CLASS B (See Fig.3 for recommended circuit)	
	RE	CISPR11/EN55011	CLASS B	
		EN55014-1		
	ESD	IEC/EN 61000-4-2	Contact ±8KV	Perf. Criteria B
		IEC/EN55014-2		Perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
		IEC/EN55014-2		perf. Criteria A
		IEC/EN61000-4-4	±2KV	perf. Criteria B
		IEC/EN61000-4-4	±4KV (See Fig.2 for recommended circuit)	perf. Criteria B
	EFT	IEC/EN61000-4-4	±4KV (See Fig.3 for recommended circuit)	perf. Criteria A
		IEC/EN55014-2		perf. Criteria B
Immunity		IEC/EN61000-4-5	line to line ±1KV	perf. Criteria B
		IEC/EN61000-4-5	line to line ±2KV (See Fig.2 for recommended circuit)	perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line ±2KV/line to ground ±4KV (See Fig.3 for recommended circuit)	perf. Criteria A
		IEC/EN55014-2		perf. Criteria B
		IEC/EN61000-4-6	10Vr.m.s	perf. Criteria A
	CS	IEC/EN55014-2		perf. Criteria A
	Voltage dip, short interruption	IEC/EN61000-4-11	0%, 70%	perf. Criteria B
	and voltage variation	IEC/EN55014-2		perf. Criteria B


Note: When the output terminal of the product needs to be connected to PE through a Y capacitor, or close to the metal frame, please refer to the Fig.3 for recommended circuit.


#### Product Characteristic Curve

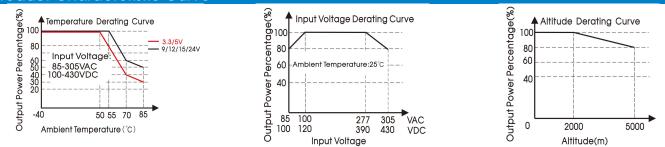

Note: ① With an AC input between 85-100V/277-305VAC and a DC input between 100-120V/390-430VDC, the output power must be derated as per temperature derating curves;

2 This product is suitable for applications using natural air cooling; for applications in closed environment please consult factory or one of our FAE.

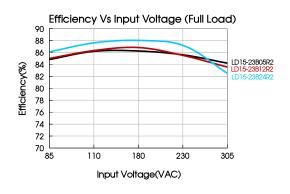

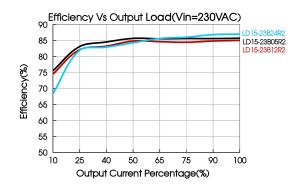


MORNSUN Guangzhou Science & Technology Co., Ltd.

**MORNSUN**<sup>®</sup>

2021.08.13-A/4 Page 3 of 6

### **Design Reference**

1. Typical application



#### Fig. 1: Typical circuit diagram

Part No.	C1	C2	TVS
LD15-23B03R2	1uF/50V	220uF/16V	SMBJ7.0A
LD15-23B05R2		220uF/16V	SMBJ7.0A
LD15-23B09R2		100uF/25V	SMBJ12A
LD15-23B12R2		100uF/25V	SMBJ20A
LD15-23B15R2		100uF/25V	SMBJ20A
LD15-23B24R2		100uF/35V	SMBJ30A

#### Output Filter Components:

We recommend using an electrolytic capacitor with high frequency, and low ESR rating for C2 (refer to manufacture's datasheet). Choose a Capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C1 is a ceramic capacitor used for filtering high-frequency noise and TVS is a recommended suppressor diode to protect the application in case of a converter failure.

#### 2. EMC compliance recommended circuit




Fig 2: EMC application circuit with higher requirements

Component	Recommended value
FUSE	3.15A/300V, slow-blow, required
MOV	S14K350
R1 (wire-wound resistor, required)	6.8Ω/3W

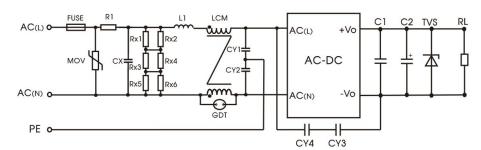


Fig 3: Recommended circuit for class I equipment

Component	Recommended value
FUSE	3.15A/300V, slow-blow, required
MOV	\$14K350
СХ	334K/305VAC
R1	12Ω/5W (wire-wound resistor)
LI	1.2mH/0.5A
CY1/CY2	2.2nF/400VAC
CY3/CY4	InF/400VAC
GDT	300V/1KA
LCM	20 mH, we recommended using part no. FL2D-10-203 (MORNSUN)

Note: Rx1/Rx2/Rx3/Rx4/Rx5/Rx6 is the bleeder resistance of CX, and the recommended resistance value is 1.5M \Omega /150VDC.

#### 3. For additional information please refer to application notes on <u>www.mornsun-power.com</u>.

**MORNSUN®** 


MORNSUN Guangzhou Science & Technology Co., Ltd.



### **Dimensions and Recommended Layout**


THIRD ANGLE PROJECTION  $\bigoplus$ 


**MORNSUN®** 

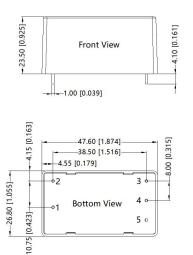




### **A2S Dimensions**





## -Ø1.50 [Ø0.059]



Note: Grid 2.54\*2.54mm

P	in-Out
Pin	Function
1	AC(L)
2	AC(N)
3	-Vo
4	+Vo
5	No Pin

#### THIRD ANGLE PROJECTION $\bigoplus$

Pin-Out			
Pin	Function		
1	AC(N)		
2	AC(L)		
3	–Vo		
4	+Vo		

Note: Unit: mm[inch] Wire range: 24–12 AWG Tightening torque: Max 0.4 N·m General tolerances: ± 1.00[±0.039]


**MORNSUN®** 

MORNSUN Guangzhou Science & Technology Co., Ltd.

2021.08.13-A/4 Page 5 of 6

## AC/DC Converter LD15-23BxxR2 Series

#### A4S Dimensions

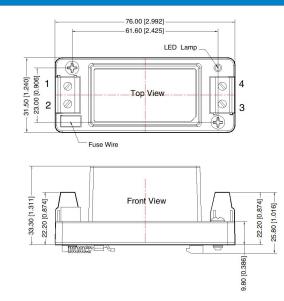

# MORNSUN®

THIRD ANGLE PROJECTION

Pin-Out	
Pin	Function
1	AC(N)
2	AC(L)
3	-Vo
4	+Vo

Unit: mm[inch] Wire range: 24–12 AWG Tightening torque: Max 0.4 N·m Mounting rail: TS35, rail needs to connect safety ground General tolerances: ±1.00[±0.039]

Note:

Note:

- 1. For additional information on Product Packaging please refer to <u>www.mornsun-power.com</u>. Packaging bag number: 58220011 (DIP package); 58220022 (A2S/A4S package);
- 2. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
- 3. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25 °C , humidity<75% with nominal input voltage and rated output load;
- 4. All index testing methods in this datasheet are based on our company corporate standards;
- 5. We can provide product customization service, please contact our technicians directly for specific information;
- 6. Products are related to laws and regulations: see "Features" and "EMC";
- 7. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

## Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. ChinaTel: 86-20-38601850Fax: 86-20-38601272E-mail: info@mornsun.cnwww.mornsun-power.com

**MORNSUN®** 

MORNSUN Guangzhou Science & Technology Co., Ltd.

2021.08.13-A/4 Page 6 of 6