



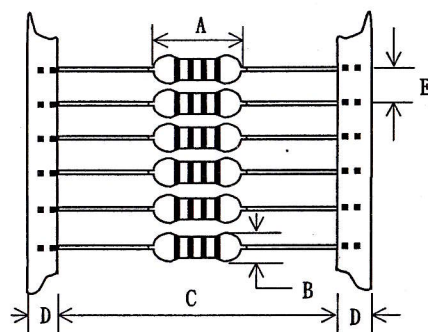
REVISION: B

REV

DESCRIPTION

APPR

DATE

**RoHS compliance**

Mechanical: (mm)

A: Max 10.5

B: Max 4.00

C: 53 +3/ -2

D: 6.0 ± 1.00

E: 5.0 ± 0.50

Net Weight: 0.33g/Pcs

Tested Instrument:

☐ Transformer Auto Tester CH-3200A☐ Withstand Voltage Tester 9605☒ Current Meter CH-301A☒ LCZ Meter CH-1061☒ Q Meter HM2801A☒ L-SRF HM2770A

Materials:

1. Core: FE-0754-333

2. Pins: PW-0034-65

3. WIRE: CW-0371-102

4. Coating Epoxy: CO-0043-163

5. SOLDER: SB-0007-155

6. FLUX: CO-0088-232

7. Carton

Reports:

SGS NO: GZ0703042401/CHEM

SGS NO: GZ0703040364/CHEM

SGS NO: EC405332100

UL NO: E196473

SGS NO: GZ0707102061/CHEM

SGS NO: GZ0707102060/CHEM

SGS NO: GZ0702019884/CHEM

SGS NO: GZ0702019886/CHEM

SGS NO: GZ0710158946/CHEM

SGS NO: GZ0703028710/CHEM

SGS NO: EC405582907

SGS NO: GZ0611172527/CHEM

Electrical Characteristic:

1. Tested Condition: 2.52MHz

2. Inductance: 15uH ± 10%

3. DCR: Max 0.72Ω

4. Q: MIN 60

5. SRF: MIN 12MHz

6. RATED DC CURRENT: Max 460mA

Temp: -20°C ~ +80°C

Others: NO

Schematic:



東莞高瞻電子元件制品有限公司


參考文件

東莞高瞻電子元件制品有限公司

受控文件副本

Approval By Customer

Control Document Specify

DONGGUAN TOP-VIEW ELECTRONICS
COMPONENTS LTD

Tel: 0769-83913778 Fax: 0769-83915551

TOP-VIEW P/N: EC-EC36-150K-TB-TC-N

TOP-VIEW ISSUE NO: TV-CE-SS-03632

TOP-VIEW SGS Report No:

GZ0703037836/CHEM

CUSTOMER P/N:

LINEAR UNIT mm

GENERAL TOLERANCE

GENERAL RAD/FILLET R0.20

ANGULAR UNIT DEGREE

GENERAL TOLERANCE ±1/2°

GENERAL DRAFT 1° MAX

DESIGN

DRAW

CHECK

APPROVED

/ /

05/6/18

05/6/18

05/6/18

SHEET 1 OF 1

SHEET SIZE A4