


REVISION: B	
REV	DESCRIPTION
APPR	DATE
RoHS compliance	



東莞高瞻电子元件制品有限公司
受控文件副本

Schematic:

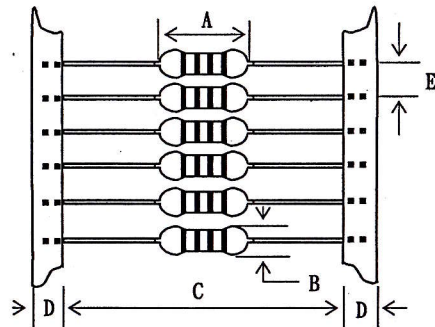

東莞高瞻电子元件制品有限公司
参考文件

Mechanical:(mm)

A:Max 7.50

B:Max 3.00

C:53 +3/ -2

D:6.0 ± 1.00

E:5.0 ± 0.50

Net Weight:0.17g/Pcs

Tested Instrument:

- ☐ Transformer Auto Tester CH-3200A
- ☐ Withstand Voltage Tester 9605
- ☒ Current Meter CH-301A
- ☐ LCZ Meter CH-1061
- ☒ Q Meter HM2801A
- ☒ L-SRF HM2770A

Materials:

1.Core:FE-0723-333

2.Pins:PW-0038-65

3.WIRE:CW-1072-184

4.Coating Epoxy:CO-0043-163

5.SOLDER:SB-0007-155

6.FLUX:CO-0088-232

7.Carton

Reports:

SGS NO:CANEC0801047801

SGS NO:CANEC0900099301

SGS NO:RLSZB000326890001

UL NO:E204861

SGS NO:CANEC0903723701

SGS NO:CANEC0903723702

SGS NO:CANEC0900186703

SGS NO:CANEC0900186702

SGS NO:EC409356502

SGS NO:EC409602700

SGS NO:GZ0902007998/CHEM

Electrical Characteristic:

1.Tested Condition:25.2MHz

2. Inductance:1.0uH±10%

3.DCR:Max 0.18Ω

4.Q:MIN 40

5.SRF:MIN 135MHz

6.RATED DC CURRENT:Max 700mA

Temp:-20℃ ~ +80℃

Others:NO

Approval By Customer		Control Document Specify		DONGGUAN TOP-VIEW ELECTRONICS COMPONENTS LTD Tel:0769-83913778 Fax:0769-83915551		TOP-VIEW P/N: EC-EC24-1R0K-TB-TC-N	
						TOP-VIEW ISSUE NO: TV-CE-SS-03479	
						TOP-VIEW Test Report No: RLSZC0004721801	
						CUSTOMER P/N:	
LINEAR UNIT mm	GENERAL TOLERANCE	GENERAL RAD/FILLET R0.20	DESIGN	DRAW	CHECK	APPROVED	
ANGULAR UNIT DEGREE	GENERAL TOLERANCE ±1/2°	GENERAL DRAFT 1° MAX	/ /	06/02/07	06/02/07	06/02/07	