



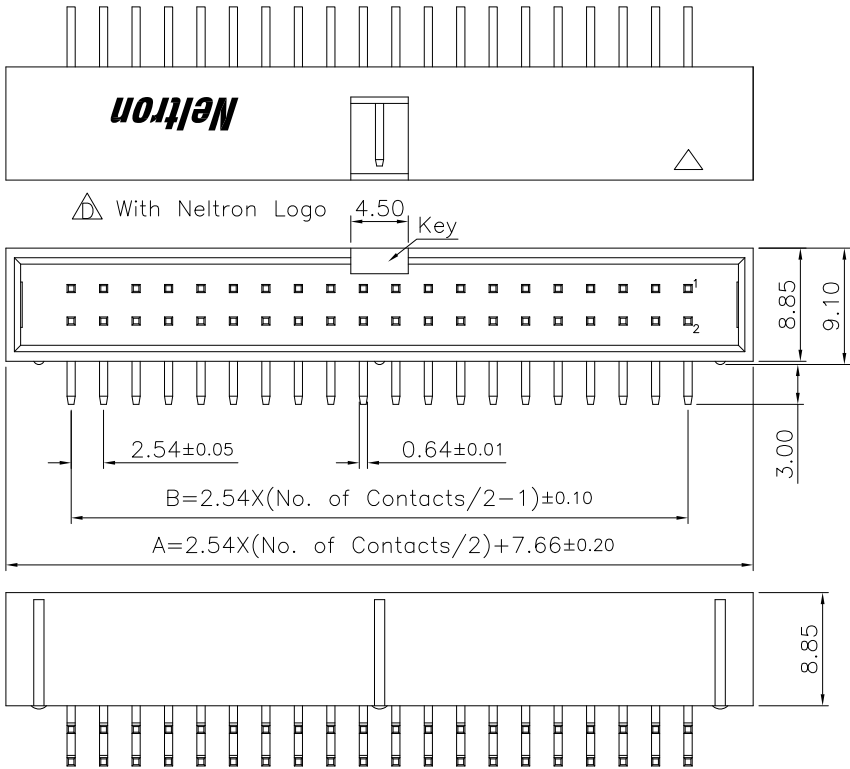

Notes:
No. Of Positions 50~64 With Three Key
All Other Pin With One Key


Pos	Dim A	Dim B	Pos	Dim A	Dim B	Pos	Dim A	Dim B	Note
6	15.28	5.08	16	27.98	17.78	34	50.84	40.64	
8	17.82	7.62	20	33.06	22.86	40	58.46	48.26	
10	20.36	10.16	24	38.14	27.94	50	71.16	60.96	1K&3K
12	22.90	12.70	26	40.68	30.48	60	83.86	73.66	1K&3K
14	25.44	15.24	30	45.76	35.56	64	88.94	78.74	1K&3K

Specifications:
Current Rating:3.0A AC/DC
Voltage Rating:250 AC/DC
Contact Resistance:20m ohm. max.
Insulation Resistance:1,000M ohm. min.
Withstanding Voltage:600V AC For One Minute
Operating Temperature Range:-40°C ~ +105°C
Material and Finish
Insulator:PBT (UL94V-0)
Insulator Color:Black
Contact:Brass
Plating:Gold/Tin Plated

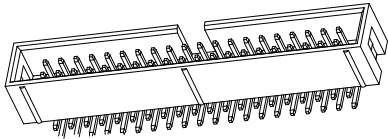


How to Order
2316R-XXX-XX-XX


- Blank Without Logo
- P:Print Neltron Logo
- Blank 6~40 Pin With One Key
- 1K:50~64 Pin With One Key
- 3K:50~64 Pin With Three Key
- G:Gold Plated
- T:Tin Plated
- SG>Selective Gold Plated
- SG30:30u" Gold Plated on Contact Area, Tin Plated On Solder Tail.
- No. Of Contacts
- Right Angle

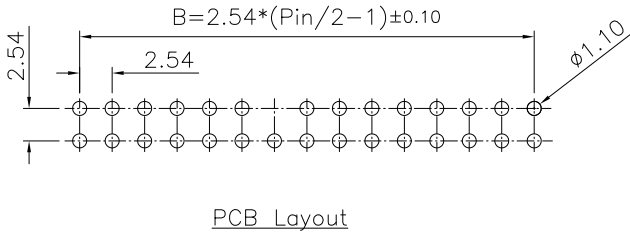


RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	Neltron Industrial Co., Ltd.	
E	28-JUL-2022	△ Modify Plated	Selin	Cel king	.X=±0.20 .XX=±0.15		
D	24-AUG-2020	△ Modify Part No.	Jamie	CHECKED: Jeremy Liu	UNIT: MM	DESCRIPTION: 2.54mm Box Header R/A Type	
C	19-MAR-2020	△ (P0001)(PC0621)	Lisy		SCALE: 1:1		
B	06-OCT-2009	ECN-TW091001	Allen	APPROVAL:	SHEET: 1/2	PART NO: 2316R-XXX-XX-XX △ △	
A	04-AUG-2005	(P0001)	Cel king		PROJECTION: 		
REV	DATE	FILE	BY	Mike Wu			


A4

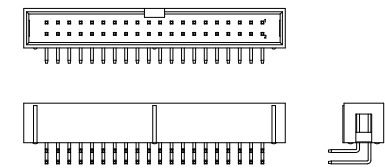


2316R-XXX-XX-XX




Tray



23Trays

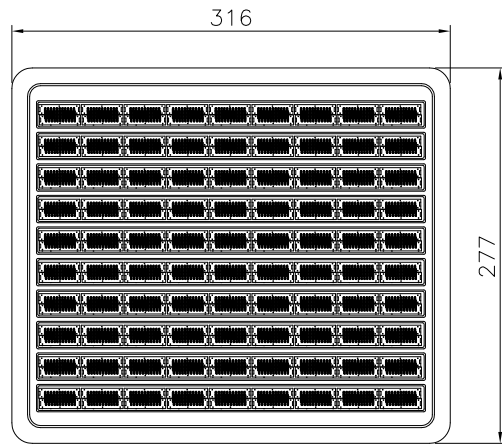

TRAY LAYOUT 902-2316R

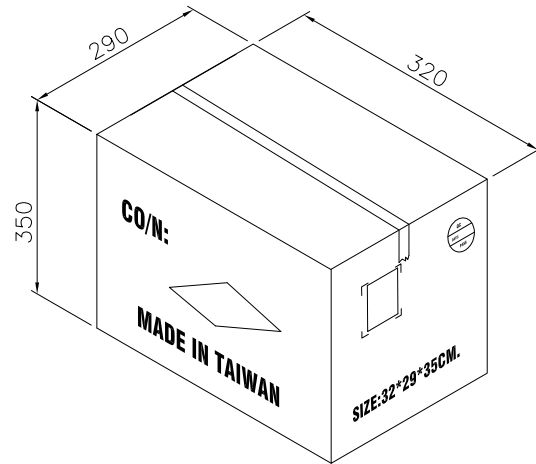

Carton

Note:

1.Dimension:

△ Tray Size:316(L)x277(W)x13(H) (mm)


Carton Size:320(L)x290(W)x350(H) (mm)

2.Quantity:

23Trays/Carton

Circits	Pcs/Tray	Tray/Carton	Q'TY
06	360	23	8280
08	300	23	6900
10	260	23	5980
12	220	23	5060
14	200	23	4600
16	180	23	4140
20	160	23	3680
24	140	23	3220
26	120	23	2760
30	120	23	2760
34	100	23	2300
40	80	23	1840
50	60	23	1380
60	60	23	1380
64	60	23	1380

RoHS Compliant

F				DRAWN: Cel king	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 Neltron Industrial Co., Ltd.		DESCRIPTION: 2.54mm Box Header R/A Type Packing List	SIZE
E	28-JUL-2022	 Modify Plated	Selin						
D	24-AUG-2020	 Modify Part No.	Jamie	CHECKED: Jeremy Liu	UNIT: MM	PART NO: 2316R-XXX-XX-XX  	A4		
C	19-MAR-2020	 (P0001)(PC0621)	Lisy		SCALE:				
B	06-OCT-2009	ECN-TW091001	Allen	APPROVAL: Mike Wu	SHEET: 2/2	D			
A	04-AUG-2005	(PC0001)	Cel king		PROJECTION: 				
REV	DATE	FILE	BY						