



REV.	ECN NO.	REVISED	DATE

NOTE:



1.MATERIAL:

- a.HOUSING:PA66
- b.CONTACT:BRASS  
(SURFACE PLATING: Ni 100u"~120u")

SEE ORDERING INFORMATION

2.ELECTRIC:

- a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
- b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN
- c.DIELECTNIC VOLTAGE: 500V AC ONE SEC LEVEL
- d.OPERATING TEMPERATURE: -25°C~ +85°C

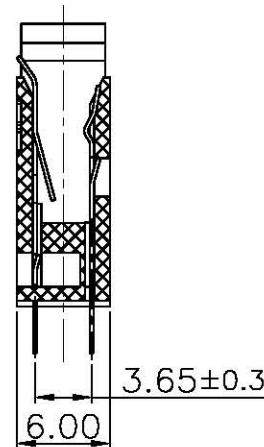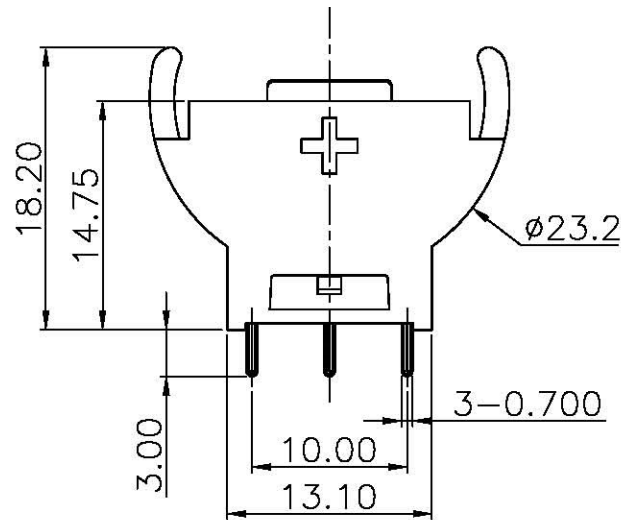

ORDERING INFORMATION

BS-05-A\*\*\*001



电池座系列

BS-05系列

DIP 90° TYPE

PLATING:  
A-Au1U"  
J-Ni100U"~120U"  
K-Sn100U"~120U"

MATERIAL:  
1A-PBT BLACK  
1B-PA66 BLACK  
2A-PPA BROWN  
2B-PPA BLACK  
3A-PPS BROWN  
3B-PPS BLACK  
4A-LCP WHITE  
4B-LCP BLACK

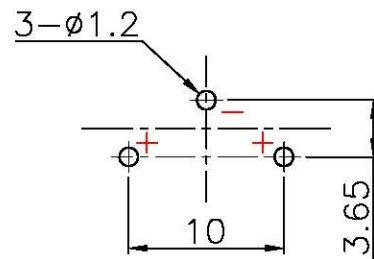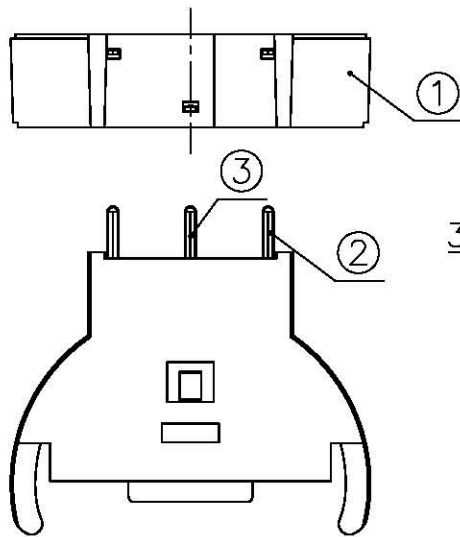

PCB Layout Diagram  
Top View



3	TERMINAL(-)	1	BRASS, T=0.25mm	Ni Plating
2	TERMINAL(+)	1	BRASS, T=0.25mm	Ni Plating
1	HOUSING	1	PA66	BLACK
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		SHENZHEN LIDEA BATTERY CO., LTD			
DECIMALS: X :±0.30 X.X :±0.25 X.XX :±0.20 X.XXX :±0.10	ANGLES: X :±1° X.X :±0.5°	DSND	YangFeng	DATE	2017-07-12
		CHKD	ZhouRuicia	DATE	2017-07-12
		APVD	XueShunyong	DATE	2017-07-12
WEIGHT: 1.64g		SCALE: 2:1	SIZE: A4	VIEW:	TITLE: BS-2032-5
SHEET 1 OF 1		UNIT: mm	REV.: A/0	OBJECT: MY	PART NO.: BS-5
					DRAW NO.:MY-CP-0023