

REVISION:A


REV

DESCRIPTION

APPR

DATE

RoHS compliance

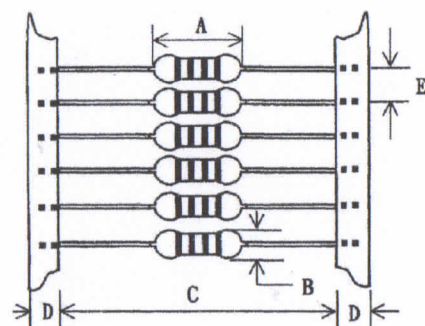

Mechanical:(mm)

A:Max 10.5

B:Max 4.00

C:53 +3/ -2

D:6.0 ± 1.00

E:5.0 ± 0.50

Net Weight:0.36g/Pcs

Materials:

1.Core:FE-0778-333

2.Pins:PW-0034-65

3.WIRE:CW-0371-102

4.Coating Epoxy:CO-0043-163

5.SOLDER:SB-0007-155

6.FLUX:CO-0088-232

7.Cartoon

Reports:

SGS NO:GZ0612181590/CHEM

SGS NO:GZ0703040364/CHEM

SGS NO:EC405332100

UL NO:E196473

SGS NO:GZ0608121209/CHEM

SGS NO:GZ0608121210/CHEM

SGS NO:GZ0702019884/CHEM

SGS NO:GZ0702019886/CHEM

SGS NO:GZ0611174870/CHEM

SGS NO:GZ0703028710/CHEM

SGS NO:EC405582907

SGS NO:GZ061112527/CHEM

Electrical Characteristic:

1.Tested Condition:2.52MHz

2.Inductance:68uH±10%

3.DCR:Max 1.47Ω

4.Q:MIN 35

5.SRF:MIN 5.7MHz

6.RATED DC CURRENT:Max 306mA

Temp:-20℃ ~ +80℃

Others:NO

Schematic:



Tested Instrument:

☐ Transformer Auto Tester CH-3200A☐ Withstand Voltage Tester 9605☒ Current Meter CH-301A☐ LCZ Meter CH-1061☒ Q Meter HM2801A☒ L-SRF HM2770A

東莞高瞻電子元件制品有限公司

受控文件副本

東莞高瞻電子元件制品有限公司

參考文件

Approval By Customer

Control Document



DONGGUAN TOP-VIEW ELECTRONICS

COMPONENTS LTD

Tel:0769-83913778 Fax:0769-83915551

TOP-VIEW P/N: EC-EC36-680K-TB-TC-N

TOP-VIEW ISSUE NO: TV-CE-SS-03649

TOP-VIEW SGS Report No:
GZ0703037836/CHEM

CUSTOMER P/N:

LINEAR UNIT mm

GENERAL TOLERANCE

GENERAL RAD/FILLET R0.20

ANGULAR UNIT DEGREE

GENERAL TOLERANCE ±1/2°

GENERAL DRAFT 1° MAX

DESIGN

DRAW

CHECK

APPROVED

/ /

0712130

0718130

0718130

SHEET 1 OF 1 SHEET SIZE A4