



HR1250-70

1D Handheld Barcode Scanner

User Guide

Disclaimer

© 2014 Fujian Newland Auto-ID Tech. Co., Ltd. All rights reserved.

Please read through the manual carefully before using the product and operate it according to the manual. It is advised that you should keep this manual for future reference.

Do not disassemble the device or remove the seal label from the device. Otherwise, Fujian Newland Auto-ID Tech. Co., Ltd. does not assume responsibility for the warranty or replacement.

All pictures in this manual are for reference only and actual product may differ. Regarding to the product modification and update, Fujian Newland Auto-ID Tech. Co., Ltd. reserves the right to make changes to any software or product to improve reliability, function, or design at any time without notice. Besides, the information contained herein is subject to change without prior notice.

The products depicted in this manual may include software copyrighted by Fujian Newland Auto-ID Tech. Co., Ltd or a third party. The user, corporation or individual, shall not duplicate, in whole or in part, distribute, modify, decompile, disassemble, decode, reverse engineer, rent, transfer or sublicense such software without prior written consent from the copyright holders.

This manual is copyrighted. No part of this publication may be reproduced, distributed or used in any form without written permission from Newland.

Fujian Newland Auto-ID Tech. Co., Ltd. reserves the right to make final interpretation of the statement above.

Revision History

| Version | Description | Date |
|---------|------------------|-------------|
| V1.0 | Initial release. | May 9, 2014 |

Table of Contents

| | |
|--|--------------|
| Revision History | - 3 - |
| Preface | 1 |
| Introduction | 1 |
| Chapter Description | 1 |
| Chapter 1 Getting Started | 2 |
| Introduction | 2 |
| Unpacking | 2 |
| HR12 Scanner | 2 |
| Connect HR12 to a Host | 3 |
| Power on, Power off, Sleep, Reboot | 4 |
| Maintenance | 4 |
| Dimensions (unit: mm) | 5 |
| Left View | 5 |
| Front View | 5 |
| Top View | 5 |
| Scanning Instructions | 6 |
| Chapter 2 System Settings | 8 |
| Introduction | 8 |
| Barcode Programming | 8 |
| Command Programming | 8 |
| Read Register | 9 |
| Write Register | 12 |
| Enable/Disable EEPROM Write | 15 |
| Write EEPROM | 17 |
| Read EEPROM | 20 |
| Registers | 23 |
| Enable/Disable Barcode Programming | 39 |
| Programming Barcode Data | 39 |
| Factory Defaults | 40 |
| Scan Mode | 41 |
| Manual Mode | 41 |
| Continuous Mode | 42 |
| Sense Mode | 45 |

| | |
|---|-----------|
| Command Trigger Mode | 49 |
| Security Level..... | 50 |
| Good Read Beep..... | 51 |
| Good Read Beep Frequency | 52 |
| Good Read Beep Duration | 52 |
| Decode Result Notification | 53 |
| Other Settings | 54 |
| Silent Mode | 54 |
| Illumination..... | 54 |
| Chapter 3 Communication Settings | 55 |
| Introduction | 55 |
| USB HID-KBW | 55 |
| Standard Keyboard | 56 |
| Emulate ALT+Keypad..... | 56 |
| Function Key Mapping..... | 57 |
| ASCII Function Key Mapping Table | 58 |
| USB Country Keyboard Types | 59 |
| Inter-Keystroke Delay | 62 |
| Convert Case | 63 |
| Emulate Numeric Keypad | 64 |
| USB COM Port Emulation | 65 |
| USB DataPipe | 66 |
| HID-POS | 67 |
| Access the Scanner with Your Program..... | 68 |
| Acquire Scanned Data..... | 68 |
| VID/PID | 68 |
| Chapter 4 Data Formatting..... | 69 |
| Introduction | 69 |
| Prefix Sequence | 69 |
| Custom Prefix..... | 70 |
| Enable/Disable Custom Prefix | 70 |
| Set Custom Prefix | 70 |
| AIM ID Prefix | 71 |
| CODE ID Prefix | 72 |
| Restore All Default Code IDs | 72 |
| Set Code ID | 72 |

| | |
|---|----|
| Custom Suffix..... | 76 |
| Enable/Disable Custom Suffix | 76 |
| Set Custom Suffix..... | 77 |
| Terminating Character Suffix | 78 |
| Enable/Disable Terminating Character Suffix | 78 |
| Set Terminating Character Suffix | 79 |

Chapter 5 Symbolologies..... 80

| | |
|--|----|
| Introduction | 80 |
| Global Settings..... | 80 |
| Enable/Disable All Symbolologies | 80 |
| Code 128 | 81 |
| Restore Factory Defaults..... | 81 |
| Enable/Disable Code 128..... | 81 |
| Set Length Range for Code 128 | 82 |
| UCC/EAN-128..... | 83 |
| Restore Factory Defaults..... | 83 |
| Enable/Disable UCC/EAN-128 | 83 |
| Set Length Range for UCC/EAN-128..... | 84 |
| AIM 128..... | 85 |
| Restore Factory Defaults..... | 85 |
| Enable/Disable AIM 128 | 85 |
| Set Length Range for AIM 128 | 86 |
| EAN-8 | 87 |
| Restore Factory Defaults..... | 87 |
| Enable/Disable EAN-8..... | 87 |
| Transmit Check Digit | 87 |
| Add-On Code | 88 |
| Add-On Code Required | 89 |
| EAN-8 Extension..... | 89 |
| EAN-13 | 90 |
| Restore Factory Defaults..... | 90 |
| Enable/Disable EAN-13..... | 90 |
| Transmit Check Digit | 90 |
| Add-On Code | 91 |
| Add-On Code Required | 92 |
| ISSN | 93 |

| | |
|---|-----|
| Restore Factory Defaults | 93 |
| Enable/Disable ISSN | 93 |
| ISBN | 94 |
| Restore Factory Defaults | 94 |
| Enable/Disable ISBN | 94 |
| Set ISBN Format | 95 |
| UPC-E | 96 |
| Restore Factory Defaults | 96 |
| Enable/Disable UPC-E | 96 |
| Transmit Check Digit | 96 |
| Add-On Code | 97 |
| Add-On Code Required | 98 |
| Transmit System Character | 98 |
| UPC-E Extension | 99 |
| UPC-A | 100 |
| Restore Factory Defaults | 100 |
| Enable/Disable UPC-A | 100 |
| Transmit Check Digit | 101 |
| Transmit Preamble Character | 101 |
| Add-On Code | 102 |
| Add-On Code Required | 103 |
| Interleaved 2 of 5 | 104 |
| Restore Factory Defaults | 104 |
| Enable/Disable Interleaved 2 of 5 | 104 |
| Check Digit Verification | 105 |
| Set Length Range for Interleaved 2 of 5 | 106 |
| ITF-6 | 107 |
| Restore Factory Defaults | 107 |
| Enable/Disable ITF-6 | 107 |
| ITF-14 | 108 |
| Restore Factory Defaults | 108 |
| Enable/Disable ITF-14 | 108 |
| Deutsche 14 | 109 |
| Restore Factory Defaults | 109 |
| Enable/Disable Deutsche 14 | 109 |
| Deutsche 12 | 110 |
| Restore Factory Defaults | 110 |

| | |
|---|-----|
| Enable/Disable Deutsche 12 | 110 |
| Matrix 2 of 5 (European Matrix 2 of 5)..... | 111 |
| Restore Factory Defaults | 111 |
| Enable/Disable Matrix 2 of 5..... | 111 |
| Check Digit Verification..... | 112 |
| Set Length Range for Matrix 2 of 5 | 113 |
| Industrial 25 | 114 |
| Restore Factory Defaults | 114 |
| Enable/Disable Industrial 25 | 114 |
| Check Digit Verification..... | 115 |
| Set Length Range for Industrial 25 | 116 |
| Standard 25 | 117 |
| Restore Factory Defaults | 117 |
| Enable/Disable Standard 25 | 117 |
| Check Digit Verification..... | 118 |
| Set Length Range for Standard 25 | 119 |
| Code 39 | 120 |
| Restore Factory Defaults | 120 |
| Enable/Disable Code 39..... | 120 |
| Check Digit Verification..... | 121 |
| Transmit Start/Stop Characters | 122 |
| Enable/Disable Code 39 Full ASCII | 122 |
| Set Length Range for Code 39 | 123 |
| Codabar | 124 |
| Restore Factory Defaults | 124 |
| Enable/Disable Codabar..... | 124 |
| Check Digit Verification..... | 125 |
| Start/Stop Characters | 126 |
| Set Length Range for Codabar | 127 |
| Code 93 | 128 |
| Restore Factory Defaults | 128 |
| Enable/Disable Code 93..... | 128 |
| Check Digit Verification..... | 129 |
| Set Length Range for Code 93 | 130 |
| Code 11..... | 131 |
| Restore Factory Defaults | 131 |
| Enable/Disable Code 11 | 131 |

| | |
|---|------------|
| Check Digit Verification..... | 132 |
| Set Length Range for Code 11 | 133 |
| Plessey | 134 |
| Restore Factory Defaults..... | 134 |
| Enable/Disable Plessey | 134 |
| Check Digit Verification..... | 135 |
| Set Length Range for Plessey | 136 |
| MSI-Plessey | 137 |
| Restore Factory Defaults..... | 137 |
| Enable/Disable MSI-Plessey | 137 |
| Check Digit Verification..... | 138 |
| Set Length Range for MSI-Plessey..... | 139 |
| RSS-14 | 140 |
| Restore Factory Defaults..... | 140 |
| Enable/Disable RSS-14 | 140 |
| Transmit Application Identifier "01"..... | 140 |
| RSS-Limited..... | 141 |
| Restore Factory Defaults..... | 141 |
| Enable/Disable RSS-Limited | 141 |
| Transmit Application Identifier "01"..... | 141 |
| RSS-Expand | 142 |
| Restore Factory Defaults..... | 142 |
| Enable/Disable RSS-Expand..... | 142 |
| Appendix..... | 143 |
| Factory Defaults Table | 143 |
| AIM ID Table..... | 150 |
| Code ID Table | 152 |
| ASCII Table | 153 |
| Digit Barcodes..... | 157 |
| Save/Cancel Barcodes | 160 |
| F1~F12 | 161 |

Preface

Introduction

This manual provides detailed instructions for setting up and using the NLS-HR1250-70 handheld barcode scanner (hereinafter referred to as “**HR12 scanner**” or “**the scanner**”).

Chapter Description

- ✧ *Chapter 1, Getting Started* : This chapter gives a general description of HR12 scanner including its technical parameters.
- ✧ *Chapter 2, System Settings* : This chapter introduces two methods to configure the HR12 scanner: barcode programming and command programming.
- ✧ *Chapter 3, Communication Settings* : This chapter describes how to configure USB parameters.
- ✧ *Chapter 4, Data Formatting* : This chapter describes how to use prefix and suffix to customize scanned data.
- ✧ *Chapter 5, Symbologies* : This chapter lists all compatible symbologies and describes how to configure the relevant parameters.
- ✧ *Appendix* : This chapter offers factory defaults table and a bunch of frequently used programming barcodes.

Chapter 1 Getting Started

Introduction

HR12 scanner is a 1D barcode scanner with excellent performance. Based on the **UIMG**® technology independently developed by Newland, HR12 scanner is able to deliver rapid image acquisition and accurate decoding; it can provide customers with best services. HR12 scanner boasts the ergonomical design that ensures easy and comfortable operation.

An illustrated introduction to the HR12 scanner is included in this chapter. If you have an HR12 device at hand, make good use of it to develop a better understanding of this manual. This chapter is written for normal users, maintenance staff and software developers.

Unpacking

Open the package and take out HR12 scanner and its accessories. Check to make sure everything on the packing list is present and intact. If any contents are damaged or missing, please keep the original package and contact your dealer immediately for after-sale service.

HR12 Scanner

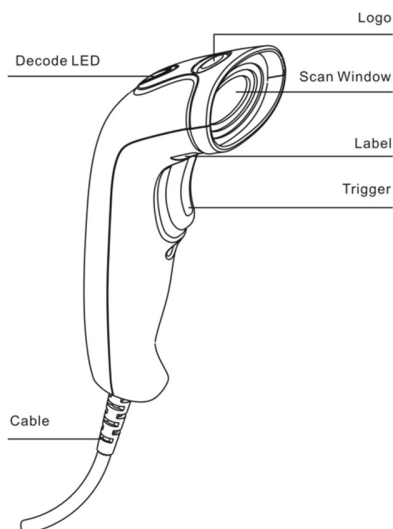


Fig. 1-1

Decode LED Definitions:

Red : The device is powered on
Green: Barcode is decoded successfully

Connect HR12 to a Host

HR12 scanner must be connected to a host device in actual application, such as PC, POS or any intelligent terminal with USB interface.

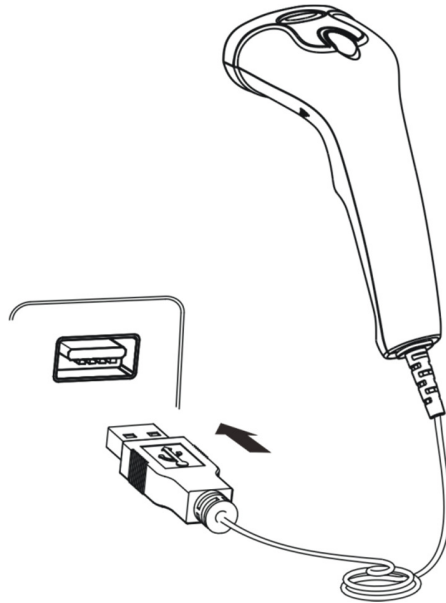


Fig. 1-2

Power on, Power off, Sleep, Reboot

Power on the scanner

Connect the scanner to a host device. Then the scanner will be turned on and automatically go into sleep mode.

Power off the scanner

Disconnect the scanner from the host.

Enter the sleep mode

If no operation is performed on the scanner for some time, the scanner will automatically enter the sleep state.

Reboot the scanner

If the scanner stops responding to input or runs abnormally, disconnect the scanner from the host device and then reconnect it.

Maintenance

- ✧ The scan window should be kept clean.
- ✧ Do not scratch the scan window of the device.
- ✧ Use soft brush to remove the stain from the scan window.
- ✧ Use the soft cloth to clean the window, such as eyeglass cleaning cloth.
- ✧ Do not spray any liquid on the scan window.
- ✧ Clean other parts of the device with water only.

Note: The warranty **DOES NOT** cover damages caused by inappropriate care and maintenance.

Dimensions (unit: mm)

Left View

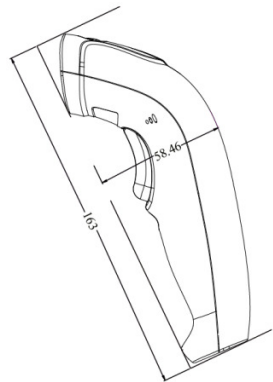


Fig. 1-3

Front View

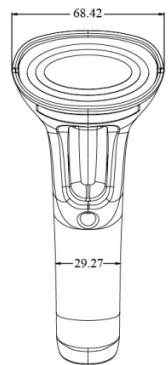


Fig. 1-4

Top View




Fig. 1-5

Scanning Instructions

When the HR12 scanner is in the Manual mode (default), you can follow the steps below to scan a barcode:

1. Hold down the trigger. Then the scanner will project a red aiming beam.
2. Aim the red beam across the center of barcode, as shown in Fig.1-6.
3. Release the trigger when the red beam goes off. For a successful read, the scanner will beep and send the decoded data to the Host.

Note: For barcodes of the same batch, the scanner keeps a very high success ratio in certain distance which is regarded as the optimal scanning distance.

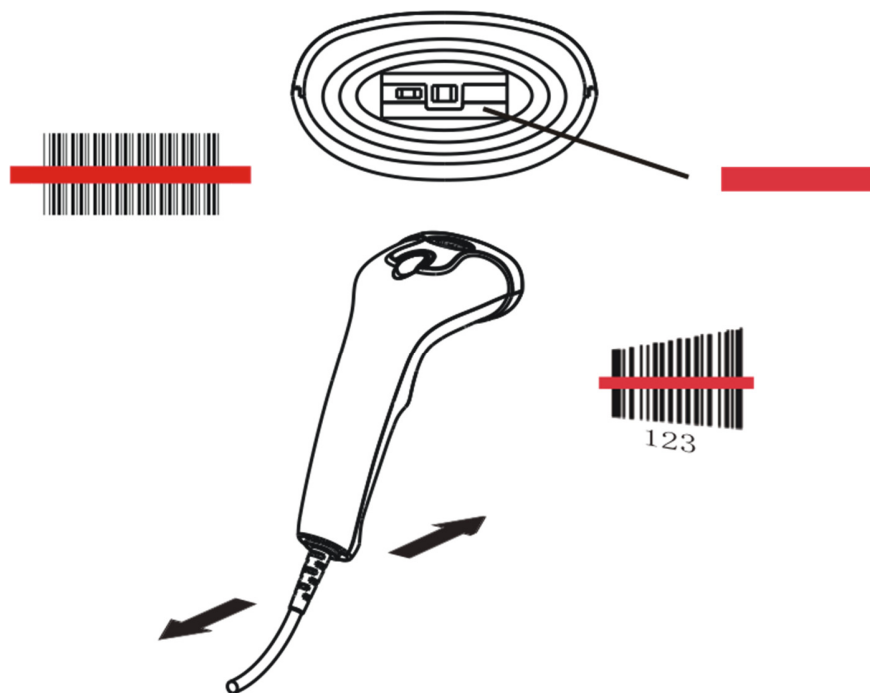


Fig. 1-6

Scan Angle

The scanner is designed to function within a certain range of scan angles. Any unreasonable deviation may cause decoding failure.

Scan angles of the scanner:

- ✧ Pitch : $\pm 60^\circ$, 0° Roll and 0° Skew (Fig. 1-7)
- ✧ Roll : $\pm 30^\circ$, 0° Pitch and 0° Skew (Fig. 1-8)
- ✧ Skew: $\pm 60^\circ$, 0° Roll and 0° Pitch (Fig. 1-9)

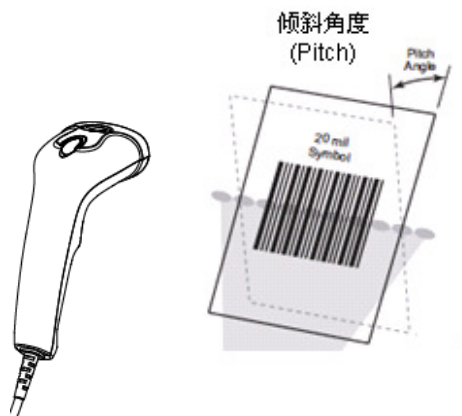


Fig. 1-7

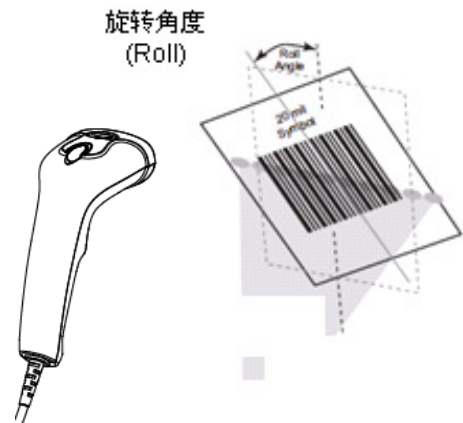


Fig. 1-8



Fig. 1-9




Chapter 2 System Settings

Introduction

There are two ways to configure the scanner: barcode programming and command programming.

Barcode Programming

The scanner can be configured by scanning programming barcodes. All user programmable features/options are described along with their programming barcodes/commands in the following sections.

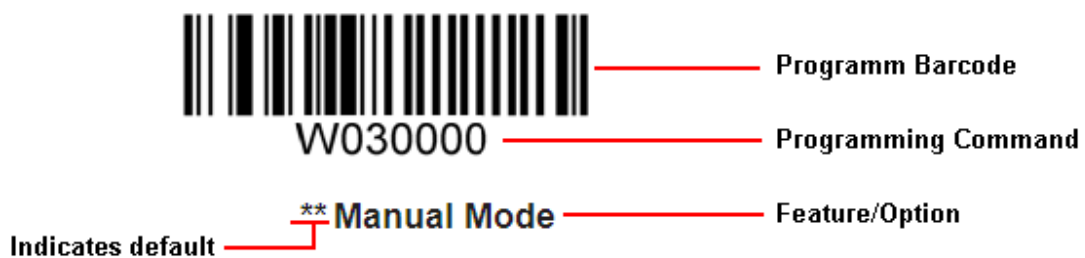

Command Programming

Besides the barcode programming method, the scanner can also be configured by serial commands sent from the host device. Note that communication parameters on the scanner and the host must match so that two devices can communicate with each other. The default settings of the scanner are 9600bps, no parity check, 8 data bits, 1 stop bit, and no flow control.



Read Register

The read register command is used to read the contents of 1 to 256 contiguous registers in the scanner.

Syntax: {Prefix1} {Types} {Lens} {Address} {Datas} {FCS}

Prefix1 : 0x7E 0x00 (2 bytes)

Types : 0x07 (1 byte)

Lens : 0x01 (1 byte).

Address: 0x0000~0xFFFF (2 bytes), starting register address.

Datas : 0x00~0xFF (1 byte), number of registers to be read. When Datas=0x00, 256 contiguous registers are to be read.

FCS : CRC-CCITT checksum (2 bytes)
Computation sequence: Types+ Lens+Address+Datas;
polynomial: $X^{16}+X^{12}+X^5+1$ (0x1021), initial value: 0x0000.

The following C language program is provided for reference.

```
unsigned int crc_cal_by_bit(unsigned char* ptr, unsigned int len)
{
    unsigned int crc = 0;
    while(len-- != 0)
    {
        for(unsigned char i = 0x80; i != 0; i /= 2)
        {
            crc *= 2;
            if((crc&0x10000) != 0)
                crc ^= 0x11021;
            if((*ptr&i) != 0)
                crc ^= 0x1021;
        }
        ptr++;
    }
    return crc;
}
```



Reply: {Prefix2} {Types} {Lens} {Datas} {FCS}

1) Success message:

Prefix2 : 0x02 0x00

Types : 0x00 (success)

Lens : Byte count of Datas returned. If Lens=0x00, that means values of 256 contiguous registers are returned.

Datas : 0x00~0xFF, data that are returned.

FCS : CRC-CCITT checksum.

2) FCS error message:

Prefix2 : 0x02 0x00

Types : 0x01 (incorrect FCS)

Lens : 0x01

Datas : 0x00

FCS : 0x04 0x01 (CRC-CCITT checksum)

3) Invalid command message (Command starting with 0x7e 0x00 is shorter than the required length or of wrong type):

Prefix2 : 0x02 0x00

Types : 0x03 (invalid command)

Lens : 0x01

Datas : 0x00

FCS : 0x6A 0x61 (CRC-CCITT checksum)





Example:

Read the contents (0x35, 0x36, 0x37) of 3 contiguous registers starting from register 0x0005.

1) Read operation succeeds:

Command sent: 0x7e 0x00 0x07 0x01 0x00 0x05 0x03 0xde 0xf6

Message received: 0x02 0x00 0x00 0x03 0x35 0x36 0x37 0x2a 0xba

2) Incorrect FCS:

Command sent: 0x7e 0x00 0x07 0x01 0x00 0x05 0x03 0x33 0x34

Message received: 0x02 0x00 0x01 0x01 0x00 0x04 0x01

3) Invalid command:

Command sent: 0x7e 0x00 0x07 0x01 0x00 0x05 0x03 0x33

Message received: 0x02 0x00 0x03 0x01 0x00 0x6A 0x61





Write Register

The write register command is used to write contiguous registers (1 to 256 registers) in the scanner.

Syntax: {Prefix1} {Types} {Lens} {Address} {Datas} {FCS}

Prefix1 : 0x7E 0x00 (2 bytes)

Types : 0x08 (1 byte)

Lens : 0x00~0xFF (1 byte), byte count, i.e. number of registers written. When Lens=0x00, 256 contiguous registers are to be written.

Address : 0x0000~0xFFFF (2 bytes), starting register address.

Datas : 0x00~0xFF (1~256 bytes), data to be written into the register(s)

FCS : CRC-CCITT checksum (2 bytes).

Computation sequence: Types+ Lens+Address+Datas;
polynomial: $X^{16}+X^{12}+X^5+1$ (0x1021), initial value: 0x0000.

The following C language program is provided for reference.

```
unsigned int crc_cal_by_bit(unsigned char* ptr, unsigned int len)
{
    unsigned int crc = 0;
    while(len-- != 0)
    {
        for(unsigned char i = 0x80; i != 0; i /= 2)
        {
            crc *= 2;
            if((crc&0x10000) != 0)
                crc ^= 0x11021;
            if((*ptr&i) != 0)
                crc ^= 0x1021;
        }
        ptr++;
    }
    return crc;
}
```





Reply: {Prefix2} {Types} {Lens} {Datas} {FCS}

1) Success message:

Prefix2 : 0x02 0x00
Types : 0x00 (success)
Lens : 0x01
Datas : 0x00
FCS : 0x33 0x31 (CRC-CCITT checksum)

2) FCS error message:

Prefix2 : 0x02 0x00
Types : 0x01 (incorrect FCS)
Lens : 0x01
Datas : 0x00
FCS : 0x04 0x01 (CRC-CCITT checksum)

3) Invalid command message (Command starting with 0x7e 0x00 is shorter than the required length or of wrong type):

Prefix2 : 0x02 0x00
Types : 0x03 (invalid command)
Lens : 0x01
Datas : 0x00
FCS : 0x6A 0x61 (CRC-CCITT checksum)





Example:

Write 0x31, 0x32, 0x33, 0x34 into 4 contiguous registers starting from register 0x000a.

1) Write operation succeeds:

Command sent: 0x7e 0x00 0x08 0x04 0x00 0x26 0x31 0x32 0x33 0x34 0xcd 0xa4

Message received: 0x02 0x00 0x00 0x01 0x00 0x33 0x31

2) Incorrect FCS:

Command sent: 0x7e 0x00 0x08 0x04 0x00 0x26 0x31 0x32 0x33 0x34 0x33 0x34

Message received: 0x02 0x00 0x01 0x01 0x00 0x04 0x01

3) Invalid command:

Command sent: 0x7e 0x00 0x08 0x04 0x00 0x26 0x31 0x32 0x33 0x34 0x33

Message received: 0x02 0x00 0x03 0x01 0x00 0x6A 0x61



Enable/Disable EEPROM Write

By default, EEPROM write is disabled after the device is powered up. You need to enable it before a write operation and recommendedly disable it afterwards to prevent miswriting.

Syntax: {Prefix1} {Types} {Lens} {Address} {Datas} {FCS}

Prefix1 : 0x7E 0x00

Types : 0x03 (EEPROM write enable)/ 0x00 (EEPROM write disable)

Lens : Byte count of Datas, 0x01 recommended.

Address : No specific significance.

Datas : No specific significance.

FCS : CRC-CCITT checksum (2 bytes).
Computation sequence: Types+ Lens+Address+Datas;
polynomial: $X^{16}+X^{12}+X^5+1$ (0x1021), initial value: 0x0000.

The following C language program is provided for reference.

```
unsigned int crc_cal_by_bit(unsigned char* ptr, unsigned int len)
{
    unsigned int crc = 0;
    while(len-- != 0)
    {
        for(unsigned char i = 0x80; i != 0; i /= 2)
        {
            crc *= 2;
            if((crc&0x10000) != 0)
                crc ^= 0x11021;
            if((*ptr&i) != 0)
                crc ^= 0x1021;
        }
        ptr++;
    }
    return crc;
}
```



W010F01

** Enter Setup

Reply: {Prefix2} {Types} {Lens} {Datas} {FCS}

1) Success message:

Prefix2 : 0x02 0x00

Types : 0x00 (success)

Lens : 0x01

Datas : 0x00

FCS : 0x33 0x31 (CRC-CCITT checksum)

2) FCS error message:

Prefix2 : 0x02 0x00

Types : 0x01 (incorrect FCS)

Lens : 0x01

Datas : 0x00

FCS : 0x04 0x01 (CRC-CCITT checksum)

3) Invalid command message (Command starting with 0x7e 0x00 is shorter than the required length or of wrong type):

Prefix2 : 0x02 0x00

Types : 0x03 (invalid command)

Lens : 0x01

Datas : 0x00

FCS : 0x6A 0x61 (CRC-CCITT checksum)



W010F00

Exit Setup

Write EEPROM

The scanner has 512 bytes of EEPROM. The EEPROM write command is used to write data to up to 256 addresses. You need to enable EEPROM write before a write operation and recommendedly disable it afterwards to prevent miswriting. Note that writing without enabling it first will not return any error message. So it is recommended to implement EEPROM read operation after every write for verification.

Syntax: {Prefix1} {Types} {Lens} {Address} {Datas} {FCS}

Prefix1 : 0x7E 0x00

Types : 0x04

Lens : 0x00~0xFF, byte count of Datas. When Lens=0x00, 256 bytes are to be written.

Address : 0x0000~0xFFFF, starting address to write data to.

Datas : 0x00~0xFF, data to be written into the EEPROM

FCS : CRC-CCITT checksum (2 bytes).

Computation sequence: Types+ Lens+Address+Datas;

polynomial: $X^{16}+X^{12}+X^5+1$ (0x1021), initial value: 0x0000.

The following C language program is provided for reference.

```
unsigned int crc_cal_by_bit(unsigned char* ptr, unsigned int len)
{
    unsigned int crc = 0;
    while(len-- != 0)
    {
        for(unsigned char i = 0x80; i != 0; i /= 2)
        {
            crc *= 2;
            if((crc&0x10000) != 0)
                crc ^= 0x11021;
            if((*ptr&i) != 0)
                crc ^= 0x1021;
        }
        ptr++;
    }
    return crc;
}
```



W010F01

** Enter Setup

Reply: {Prefix2} {Types} {Lens} {Datas} {FCS}

1) Success message:

Prefix2 : 0x02 0x00

Types : 0x00 (success)

Lens : 0x01

Datas : 0x00

FCS : 0x33 0x31 (CRC-CCITT checksum)

2) FCS error message:

Prefix2 : 0x02 0x00

Types : 0x01 (incorrect FCS)

Lens : 0x01

Datas : 0x00

FCS : 0x04 0x01 (CRC-CCITT checksum)

3) EERPOM not responding message:

Prefix2 : 0x02 0x00

Types : 0x02 (EEPROM not responding)

Lens : 0x01

Datas : 0x00

FCS : 0x5d 0x51 (CRC-CCITT checksum)

4) Invalid command message (Command starting with 0x7e 0x00 is shorter than the required length or of wrong type):

Prefix2 : 0x02 0x00

Types : 0x03 (invalid command)

Lens : 0x01

Datas : 0x00

FCS : 0x6A 0x61 (CRC-CCITT checksum)



W010F00

Exit Setup



Example:

Write 0x51, 0x52, 0x53, 0x54 into 4 contiguous addresses starting from address 0x0000.

1) Write operation succeeds:

Command sent: 0x7e 0x00 0x04 0x04 0x00 0x00 0x51 0x52 0x53 0x54 0xbc 0x17

Message received: 0x02 0x00 0x00 0x01 0x00 0x33 0x31

2) Incorrect FCS:

Command sent: 0x7e 0x00 0x04 0x03 0x00 0x00 0x51 0x52 0x53 0x54 0x33 0x34

Message received: 0x02 0x00 0x01 0x01 0x00 0x04 0x01





Read EEPROM

The scanner has 512 bytes of EEPROM. The EEPROM read command is used to read the contents from 1 to 256 contiguous addresses of the EEPROM.

Syntax: {Prefix1} {Types} {Lens} {Address} {Datas} {FCS}

Prefix1 : 0x7E 0x00

Types : 0x05

Lens : 0x01

Address: 0x0000~0xFFFF (2 bytes), starting EEPROM address to read.

Datas : 0x00~0xFF, number of EEPROM addresses to be read. When Datas=0x00, 256 contiguous addresses are to be read.

FCS : CRC-CCITT checksum (2 bytes)
Computation sequence: Types+ Lens+Address+Datas;
polynomial: $X^{16}+X^{12}+X^5+1$ (0x1021), initial value: 0x0000.

The following C language program is provided for reference.

```
unsigned int crc_cal_by_bit(unsigned char* ptr, unsigned int len)
{
    unsigned int crc = 0;
    while(len-- != 0)
    {
        for(unsigned char i = 0x80; i != 0; i /= 2)
        {
            crc *= 2;
            if((crc&0x10000) != 0)
                crc ^= 0x11021;
            if((*ptr&i) != 0)
                crc ^= 0x1021;
        }
        ptr++;
    }
    return crc;
}
```





Reply: {Prefix2} {Types} {Lens} {Datas} {FCS}

1) Success message:

Prefix2 : 0x02 0x00
Types : 0x00 (success)
Lens : Byte count of Datas returned.
Datas : 0x00~0xFF, data that are returned.
FCS : CRC-CCITT checksum.

2) FCS error message:

Prefix2 : 0x02 0x00
Types : 0x01 (incorrect FCS)
Lens : 0x01
Datas : 0x00
FCS : 0x04 0x01 (CRC-CCITT checksum)

3) EEPROM not responding message:

Prefix2 : 0x02 0x00
Types : 0x02 (EEPROM not responding)
Lens : 0x01
Datas : 0x00
FCS : 0x5d 0x51 (CRC-CCITT checksum)

4) Invalid command message (Command starting with 0x7e 0x00 is shorter than the required length or of wrong type):

Prefix2 : 0x02 0x00
Types : 0x03 (invalid command)
Lens : 0x01
Datas : 0x00
FCS : 0x6A 0x61 (CRC-CCITT checksum)





Example:

Read the contents (0x35 0x36 0x37) of 3 contiguous EEPROM addresses starting from address 0x0005.

1) Read operation succeeds:

Command sent: 0x7e 0x00 0x05 0x01 0x00 0x05 0x03 0x9a 0x75

Message received: 0x02 0x00 0x00 0x03 0x35 0x36 0x37 0x2a 0xba

2) Incorrect FCS:

Command sent: 0x7e 0x00 0x05 0x01 0x00 0x05 0x03 0x33 0x34

Message received: 0x02 0x00 0x01 0x01 0x00 0x04 0x01





**** Enter Setup**

Registers

| | | | | |
|----------|--|--|-------------------|--|
| Register | 0x0000 | | | |
| Bit | Feature | | | |
| Bit 7 | Reserved | | | |
| Bit 6 | 1: Silent Mode Off | | 0: Silent Mode On | |
| Bit 5-4 | Reserved | | | |
| Bit 3-2 | Illumination: 00: Off 01: On When Scanning 10/11: Always On | | | |
| Bit 1-0 | Scan Mode: 00: Manual Mode 01: Command Trigger Mode 10: Continuous Mode 11: Sense Mode | | | |
| Register | 0x0003 | | | |
| Bit | Feature | | | |
| Bit 7-0 | Sensitivity 0x00~0xFF: 0-255 levels. The smaller the value, the higher the sensitivity. | | | |
| Register | 0x0004 | | | |
| Bit | Feature | | | |
| Bit 7-0 | Image Stabilization Timeout 0x00-0xFF: 0.0-25.5s | | | |
| Register | 0x0005 | | | |
| Bit | Feature | | | |
| Bit 7-0 | Timeout between Decodes 0x00-0xFF: 0.0-25.5s | | | |
| Register | 0x0006 | | | |
| Bit | Feature | | | |
| Bit 7-0 | Decode Session Timeout 0x00: Infinite time; 0x01-0xFF: 1-255s | | | |
| Register | 0x0007 | | | |
| Bit | Feature | | | |
| Bit 7-0 | Timeout between Decodes (Same Barcode) 0x00: Infinite time; 0x01-0xFF: 0.1-25.5s | | | |



W010F00

Exit Setup



W010F01

** Enter Setup

| | |
|-----------------|--|
| Register | <i>0x0009</i> |
| Bit | Feature |
| Bit 7-2 | Reserved |
| Bit 1-0 | 00: USB DATAPIPE 01: USB HID-KBW 10: USB COM Port Emulation 11: USB HID-POS |
| Register | <i>0x000A</i> |
| Bit | Feature |
| Bit 7-5 | Reserved |
| Bit 4 | 0: Allow Rereading Same Barcode 1: Disallow Rereading Same Barcode |
| Bit 3-2 | Reserved |
| Bit 1-0 | Security Level 00-03: 0-3 level. The higher the value, the lower the error rate and efficiency. |
| Register | <i>0x000F</i> |
| Bit | Feature |
| Bit 7-3 | Reserved |
| Bit 2-1 | 00: Do Not Transmit Programming Barcode Data 11: Transmit Programming Barcode Data |
| Bit 0 | 0: Exit Setup 1: Enter Setup |
| Register | <i>0x0010</i> |
| Bit | Feature |
| Bit 7-0 | Good Read Beep Frequency 0xDA: Low 0x4B: Medium 0x25: High |
| Register | <i>0x0011</i> |
| Bit | Feature |
| Bit 7-0 | Good Read Beep Duration 0x1F: 40ms 0x3E: 80ms 0x5D: 120ms |
| Register | <i>0x0012</i> |
| Bit | Feature |
| Bit 7-3 | Reserved |
| Bit 2 | 1: Good Read Beep On 0: Good Read Beep Off |
| Bit 1-0 | Reserved |



W010F00

Exit Setup



| Register | 0x0019 | | |
|----------|---|---|---------------------------|
| Bit | Feature | | |
| Bit 7-0 | USB Country Keyboard Types | | |
| | 00: U.S. | 01: Belgium | 02: Brazil |
| | 03: Canada | 04: Czech | 05: Denmark |
| | 06: Finland | 07: France | 08: Austria |
| | 09: Greece | 0A: Hungary | 0B: Israel |
| | 0C: Italy | 0D: Latin America | 0E: Netherland |
| | 0F: Norway | 10: Poland | 11: Portugal |
| | 12: Romania | 13: Russia | 15: Slovakia |
| | 16: Spain | 17: Sweden | 18: Switzerland |
| | 19: Turkey1 | 1A: Turkey2 | 1B: UK |
| | 1C: Japan | | |
| | Register | 0x001A | |
| Bit | Feature | | |
| Bit 7-6 | Inter-keystroke delay | | |
| | 00: No delay | 01: Short delay (5ms) | |
| | 10: Medium delay (10ms) | 11: Long delay (15ms) | |
| Bit 5-3 | Convert case | | |
| | 000: No Case Conversion | 001: Invert Upper and Lower Case Characters | |
| | 100/101: Convert All to Upper Case | 110/111: Convert All to Lower Case | |
| Bit 2 | 1: Emulate Numeric Keypad 0: Do Not Emulate Numeric Keypad | | |
| Bit 1-0 | 00: Standard Keyboard | 01: Function Key Mapping | 10/11: Emulate ALT+Keypad |
| Register | 0x0031 | | |
| Bit | Feature | | |
| Bit 7-6 | Reserved | | |
| Bit 5 | 1: Enable Decode Result Notification 0: Disable Decode Result Notification | | |
| Bit 4 | 1: Enable Terminating Character Suffix 0: Disable Terminating Character Suffix | | |
| Bit 3 | 1: Enable Custom Suffix 0: Disable Custom Suffix | | |
| Bit 2 | 1: Enable Custom Prefix 0: Disable Custom Prefix | | |
| Bit 1 | 1: Enable CODE ID Prefix 0: Disable CODE ID Prefix | | |
| Bit 0 | Prefix Sequence | | |
| | 1: Custom+Code ID+ AIM ID 0: Code ID+Custom+AIM ID | | |





W010F01

** Enter Setup

| | | |
|-----------------|--|---|
| Register | <i>0x0037-0x33</i> | |
| Bit | Feature | |
| Bit 39-0 | Set Custom Prefix | |
| Register | <i>0x0042-0x3E</i> | |
| Bit | Feature | |
| Bit 39-0 | Set Custom Suffix | |
| Register | <i>0x004D-0x49</i> | |
| Bit | Feature | |
| Bit 39-0 | Set Terminating Character Suffix | |
| Register | <i>0x0061</i> | |
| Bit | Feature | |
| Bit 7-1 | Reserved | |
| Bit 0 | 1: Enable Code 128 | 0: Disable Code 128 |
| Register | <i>0x0062</i> | |
| Bit | Feature | |
| Bit 7-2 | Reserved | |
| Bit 1-0 | 00: Disable UCC/EAN 128 | 01: Decode as Code 128 10/11: Enable UCC/EAN 128 |
| Register | <i>0x0063</i> | |
| Bit | Feature | |
| Bit 7-2 | Reserved | |
| Bit 1-0 | 00: Disable AIM 128 | 01: Decode as Code 128 10/11: Enable AIM 128 |
| Register | <i>0x0065</i> | |
| Bit | Feature | |
| Bit 7-6 | EAN-8 Extension 00: Disable EAN-8 Zero Extend 01: Enable EAN-8 Zero Extend 10/11: Convert EAN-8 to EAN-13 | |
| Bit 5 | 1: Enable EAN-8 5-digit Add-on Code | 0: Disable EAN-8 5-digit Add-on Code |
| Bit 4 | 1: Enable EAN-8 2-digit Add-on Code | 0: Disable EAN-8 2-digit Add-on Code |
| Bit 3 | 1: EAN-8 Add-on Code Required | 0: EAN-8 Add-on Code Not Required |
| Bit 2 | 1: Transmit EAN-8 Check Digit | 0: Do Not Transmit EAN-8 Check Digit |
| Bit 1 | Reserved | |
| Bit 0 | 1: Enable EAN-8 | 0: Disable EAN-8 |



W010F00

Exit Setup



| | | |
|-----------------|---|--|
| Register | <i>0x0066</i> | |
| Bit | Feature | |
| Bit 7-6 | Reserved | |
| Bit 5 | 1: Enable EAN-13 5-digit Add-on Code | 0: Disable EAN-13 5-digit Add-on Code |
| Bit 4 | 1: Enable EAN-13 2-digit Add-on Code | 0: Disable EAN-13 2-digit Add-on Code |
| Bit 3 | 1: EAN-13 Add-on Code Required | 0: EAN-13 Add-on Code Not Required |
| Bit 2 | 1: Transmit EAN-13 Check Digit | 0: Do Not Transmit EAN-13 Check Digit |
| Bit 1 | Reserved | |
| Bit 0 | 1: Enable EAN-13 | 0: Disable EAN-13 |
| Register | <i>0x0067</i> | |
| Bit | Feature | |
| Bit 7-2 | Reserved | |
| Bit 1-0 | 00: Disable ISSN | 01: Decode as EAN-13 10/11: Enable ISSN |
| Register | <i>0x0068</i> | |
| Bit | Feature | |
| Bit 7-3 | Reserved | |
| Bit 2 | ISBN Format 1: ISBN-10 0: ISBN-13 | |
| Bit 1-0 | 00: Disable ISBN | 01: Decode as EAN-13 10/11: Enable ISBN |
| Register | <i>0x0069</i> | |
| Bit | Feature | |
| Bit 7-6 | UPC-E Extension 00: Disable UPC-E extend 01: Enable UPC-E extend 10/11: Convert UPC-E to UPC-A | |
| Bit 5 | 1: Enable UPC-E 5-digit Add-on Code | 0: Disable UPC-E 5-digit Add-on Code |
| Bit 4 | 1: Enable UPC-E 2-digit Add-on Code | 0: Disable UPC-E 2-digit Add-on Code |
| Bit 3 | 1: UPC-E Add-on Code Required | 0: UPC-E Add-on Code Not Required |
| Bit 2 | 1: Transmit UPC-E Check Digit | 0: Do Not Transmit UPC-E Check Digit |
| Bit 1 | Reserved | |
| Bit 0 | 1: Enable UPC-E | 0: Disable UPC-E |





W010F01

** Enter Setup

| Register | 0x006A |
|----------|---|
| Bit | Feature |
| Bit 7-6 | Reserved |
| Bit 5-4 | UPC-E System Character 01: Do not transmit system character 10/11: Transmit system character |
| Bit 3-2 | Reserved |
| Bit 1-0 | UPC-A Preamble Character 00: No Preamble 01: System Character 10/11: System Character & Country Code |
| Register | 0x006B |
| Bit | Feature |
| Bit 7 | Reserved |
| Bit 6 | 1: Enable UPC-A 5-digit Add-on Code 0: Disable UPC-A 5-digit Add-on Code |
| Bit 5 | 1: Enable UPC-A 2-digit Add-on Code 0: Disable UPC-A 2-digit Add-on Code |
| Bit 4 | 1: UPC-A Add-on Code Required 0: UPC-A Add-on Code Not Required |
| Bit 3 | 1: Transmit UPC-A Check Digit 0: Do Not Transmit UPC-A Check Digit |
| Bit 2 | Reserved |
| Bit 1-0 | 00: Disable UPC-A 01: Decode as EAN-13 10/11: Enable UPC-A |
| Register | 0x006C |
| Bit | Feature |
| Bit 7-4 | Reserved |
| Bit 3 | 1: Transmit Interleaved 2 of 5 Check Digit 0: Do Not Transmit Interleaved 2 of 5 Check Digit |
| Bit 2 | 1: Enable Interleaved 2 of 5 Check Digit 0: Disable Interleaved 2 of 5 Check Digit |
| Bit 1 | Reserved |
| Bit 0 | 1: Enable Interleaved 2 of 5 0: Disable Interleaved 2 of 5 |
| Register | 0x006D |
| Bit | Feature |
| Bit 7-4 | Reserved |
| Bit 3 | 1: Transmit ITF-6 Check Digit 0: Do Not Transmit ITF-6 Check Digit |
| Bit 2 | Reserved |
| Bit 1-0 | 00: Disable ITF-6 01: Decode as Interleaved 2 of 5 10/11: Enable ITF-6 |



W010F00

Exit Setup



| | | |
|-----------------|--|--|
| Register | <i>0x006E</i> | |
| Bit | Feature | |
| Bit 7-4 | Reserved | |
| Bit 3 | 1: Transmit ITF-14 Check Digit | 0: Do Not Transmit ITF-14 Check Digit |
| Bit 2 | Reserved | |
| Bit 1-0 | 00: Disable ITF-14 01: Decode as Interleaved 2 of 5 10/11: Enable ITF-14 | |
| Register | <i>0x006F</i> | |
| Bit | Feature | |
| Bit 7-4 | Reserved | |
| Bit 3 | 1: Transmit Deutsche 14 Check Digit | 0: Do Not Transmit Deutsche 14 Check Digit |
| Bit 2 | Reserved | |
| Bit 1-0 | 00: Disable Deutsche 14 01: Decode as Interleaved 2 of 5 10/11: Enable Deutsche 14 | |
| Register | <i>0x0070</i> | |
| Bit | Feature | |
| Bit 7-4 | Reserved | |
| Bit 3 | 1: Transmit Deutsche 12 Check Digit | 0: Do Not Transmit Deutsche 12 Check Digit |
| Bit 2 | Reserved | |
| Bit 1-0 | 00: Disable Deutsche 12 01: Decode as Interleaved 2 of 5 10/11: Enable Deutsche 12 | |
| Register | <i>0x0071</i> | |
| Bit | Feature | |
| Bit 7-4 | Reserved | |
| Bit 3 | 1: Transmit Matrix 2 of 5 Check Digit | 0: Do Not Transmit Matrix 2 of 5 Check Digit |
| Bit 2 | 1: Enable Matrix 2 of 5 Check Digit | 0: Disable Matrix 2 of 5 Check Digit |
| Bit 1 | Reserved | |
| Bit 0 | 1: Enable Matrix 2 of 5 | 0: Disable Matrix 2 of 5 |
| Register | <i>0x0072</i> | |
| Bit | Feature | |
| Bit 7-4 | Reserved | |
| Bit 3 | 1: Transmit Industrial 25 Check Digit | 0: Do Not Transmit Industrial 25 Check Digit |
| Bit 2 | 1: Enable Industrial 25 Check Digit | 0: Disable Industrial 25 Check Digit |
| Bit 1 | Reserved | |
| Bit 0 | 1: Enable Industrial 25 | 0: Disable Industrial 25 |





W010F01

** Enter Setup

| Register | 0x0073 | |
|----------|--|--|
| Bit | Feature | |
| Bit 7-4 | Reserved | |
| Bit 3 | 1: Transmit Standard 25 Check Digit | 0: Do Not Transmit Standard 25 Check Digit |
| Bit 2 | 1: Enable Standard 25 Check Digit | 0: Disable Standard 25 Check Digit |
| Bit 1 | Reserved | |
| Bit 0 | 1: Enable Standard 25 | 0: Disable Standard 25 |
| Register | 0x0074 | |
| Bit | Feature | |
| Bit 7-6 | Reserved | |
| Bit 5 | 1: Enable Code 39 Full ASCII | 0: Disable Code 39 Full ASCII |
| Bit 4 | 1: Transmit Code 39 Check Digit | 0: Do Not Transmit Code 39 Check Digit |
| Bit 3 | 1: Enable Code 39 Check Digit | 0: Disable Code 39 Check Digit |
| Bit 2 | 1: Transmit Code 39 Start/Stop Characters 0: Do Not Transmit Code 39 Start/Stop Characters | |
| Bit 1 | Reserved | |
| Bit 0 | 1: Enable Code 39 | 0: Disable Code 39 |
| Register | 0x0075 | |
| Bit | Feature | |
| Bit 7 | Reserved | |
| Bit 6 | 1: Transmit Codabar Check Digit | 0: Do Not Transmit Codabar Check Digit |
| Bit 5 | 1: Enable Codabar Check Digit | 0: Disable Codabar Check Digit |
| Bit 4-3 | Codabar Start/Stop Character Format: 00: ABCD/ABCD 01: ABCD/TN*E 10: abcd/abcd 11: abcd/tn*e | |
| Bit 2 | 1: Transmit Codabar Start/Stop Characters 0: Do Not Transmit Codabar Start/Stop Characters | |
| Bit 1 | Reserved | |
| Bit 0 | 1: Enable Codabar | 0: Disable Codabar |



W010F00

Exit Setup



| | | |
|-----------------|--|--|
| Register | 0x0076 | |
| Bit | Feature | |
| Bit 7-4 | Reserved | |
| Bit 3 | 1: Transmit Code 93 Check Digit | 0: Do Not Transmit Code 93 Check Digit |
| Bit 2 | 1: Enable Code 93 Check Digit | 0: Disable Code 93 Check Digit |
| Bit 1 | Reserved | |
| Bit 0 | 1: Enable Code 93 | 0: Disable Code 93 |
| Register | 0x0077 | |
| Bit | Feature | |
| Bit 7-6 | Reserved | |
| Bit 5 | 1: Transmit Code 11 Check Digit | 0: Do Not Transmit Code 11 Check Digit |
| Bit 4-2 | Code 11 Check Digit Verification: 000: Disable 001: One Check Digit, MOD11 010: Two Check Digits, MOD11/MOD11 011: Two Check Digits, MOD11/MOD9 100: One Check Digit, MOD11 (Len <= 11); Two Check Digits, MOD11/MOD11 (Len > 11) 101: One Check Digit, MOD11 (Len <= 11); Two Check Digits, MOD11/MOD9 (Len > 11) | |
| Bit 1 | Reserved | |
| Bit 0 | 1: Enable Code 11 | 0: Disable Code 11 |
| Register | 0x0078 | |
| Bit | Feature | |
| Bit 7-4 | Reserved | |
| Bit 3 | 1: Transmit Plessey Check Digit | 0: Do Not Transmit Plessey Check Digit |
| Bit 2 | 1: Enable Plessey Check Digit | 0: Disable Plessey Check Digit |
| Bit 1 | Reserved | |
| Bit 0 | 1: Enable Plessey | 0: Disable Plessey |





W010F01

** Enter Setup

| Register | 0x0079 |
|----------|--|
| Bit | Feature |
| Bit 7-5 | Reserved |
| Bit 4 | 1: Transmit MSI-Plessey Check Digit 0: Do Not Transmit MSI-Plessey Check Digit |
| Bit 3-2 | MSI-Plessey Check Digit Verification: 00: Disable 01: One Check Digit, MOD10 10: Two Check Digits, MOD10/MOD10 11: Two Check Digits, MOD10/MOD11 |
| Bit 1 | Reserved |
| Bit 0 | 1: Enable MSI-Plessey 0: Disable MSI-Plessey |
| Register | 0x007A |
| Bit | Feature |
| Bit 7-3 | Reserved |
| Bit 2 | 1: Transmit RSS-14 Application Identifier 0: Do Not Transmit RSS-14 Application Identifier |
| Bit 1 | Reserved |
| Bit 0 | 1: Enable RSS-14 0: Disable RSS-14 |
| Register | 0x007B |
| Bit | Feature |
| Bit 7-3 | Reserved |
| Bit 2 | 1: Transmit RSS-Limited Application Identifier 0: Do Not Transmit RSS-Limited Application Identifier |
| Bit 1 | Reserved |
| Bit 0 | 1: Enable RSS-Limited 0: Disable RSS-Limited |
| Register | 0x007C |
| Bit | Feature |
| Bit 7-1 | Reserved |
| Bit 0 | 1: Enable RSS-Expand 0: Disable RSS-Expand |



W010F00

Exit Setup



| | |
|-----------------|---------------------------------------|
| Register | 0x0080 |
| Bit | Feature |
| Bit 7-0 | Set Code 128 Maximum Length |
| Register | 0x0081 |
| Bit | Feature |
| Bit 7-0 | Set Code 128 Minimum Length |
| Register | 0x0082 |
| Bit | Feature |
| Bit 7-0 | Set UCC/EAN-128 Maximum Length |
| Register | 0x0083 |
| Bit | Feature |
| Bit 7-0 | Set UCC/EAN-128 Minimum Length |
| Register | 0x0084 |
| Bit | Feature |
| Bit 7-0 | Set AIM 128 Maximum Length |
| Register | 0x0085 |
| Bit | Feature |
| Bit 7-0 | Set AIM 128 Minimum Length |
| Register | 0x0086 |
| Bit | Feature |
| Bit 7-0 | Set Interleaved 2 of 5 Maximum Length |
| Register | 0x0087 |
| Bit | Feature |
| Bit 7-0 | Set Interleaved 2 of 5 Minimum Length |
| Register | 0x0088 |
| Bit | Feature |
| Bit 7-0 | Set Matrix 2 of 5 Maximum Length |
| Register | 0x0089 |
| Bit | Feature |
| Bit 7-0 | Set Matrix 2 of 5 Minimum Length |





W010F01

** Enter Setup

| | |
|-----------------|----------------------------------|
| Register | <i>0x008A</i> |
| Bit | Feature |
| Bit 7-0 | Set Industrial 25 Maximum Length |
| Register | <i>0x008B</i> |
| Bit | Feature |
| Bit 7-0 | Set Industrial 25 Minimum Length |
| Register | <i>0x008C</i> |
| Bit | Feature |
| Bit 7-0 | Set Standard 25 Maximum Length |
| Register | <i>0x008D</i> |
| Bit | Feature |
| Bit 7-0 | Set Standard 25 Minimum Length |
| Register | <i>0x008E</i> |
| Bit | Feature |
| Bit 7-0 | Set Code 39 Maximum Length |
| Register | <i>0x008F</i> |
| Bit | Feature |
| Bit 7-0 | Set Code 39 Minimum Length |
| Register | <i>0x0090</i> |
| Bit | Feature |
| Bit 7-0 | Set Codabar Maximum Length |
| Register | <i>0x0091</i> |
| Bit | Feature |
| Bit 7-0 | Set Codabar Minimum Length |
| Register | <i>0x0092</i> |
| Bit | Feature |
| Bit 7-0 | Set Code 93 Maximum Length |
| Register | <i>0x0093</i> |
| Bit | Feature |
| Bit 7-0 | Set Code 93 Minimum Length |



W010F00

Exit Setup



| | |
|-----------------|--|
| Register | <i>0x0094</i> |
| Bit | Feature |
| Bit 7-0 | Set Code 11 Maximum Length |
| Register | <i>0x0095</i> |
| Bit | Feature |
| Bit 7-0 | Set Code 11 Minimum Length |
| Register | <i>0x0096</i> |
| Bit | Feature |
| Bit 7-0 | Set Plessey Maximum Length |
| Register | <i>0x0097</i> |
| Bit | Feature |
| Bit 7-0 | Set Plessey Minimum Length |
| Register | <i>0x0098</i> |
| Bit | Feature |
| Bit 7-0 | Set MSI-Plessey Maximum Length |
| Register | <i>0x0099</i> |
| Bit | Feature |
| Bit 7-0 | Set MSI-Plessey Minimum Length |
| Register | <i>0x00A1, 0x00A0</i> |
| Bit | Feature |
| Bit 15-0 | Set Code 128 Code ID ASCII value of one or two English letters (lower or upper case) |
| Register | <i>0x00A3, 0x00A2</i> |
| Bit | Feature |
| Bit 15-0 | Set UCC/EAN-128 Code ID ASCII value of one or two English letters (lower or upper case) |
| Register | <i>0x00A5, 0x00A4</i> |
| Bit | Feature |
| Bit 15-0 | Set AIM 128 Code ID ASCII value of one or two English letters (lower or upper case) |





W010F01

** Enter Setup

| | | |
|-----------------|---|--|
| Register | <i>0x00A9, 0x00A8</i> | |
| Bit | Feature | |
| Bit 15-0 | Set EAN-8 Code ID ASCII value of one or two English letters (lower or upper case) | |
| Register | <i>0x00AB, 0x00AA</i> | |
| Bit | Feature | |
| Bit 15-0 | Set EAN-13 Code ID ASCII value of one or two English letters (lower or upper case) | |
| Register | <i>0x00AD, 0x00AC</i> | |
| Bit | Feature | |
| Bit 15-0 | Set ISSN Code ID ASCII value of one or two English letters (lower or upper case) | |
| Register | <i>0x00B1, 0x00B0</i> | |
| Bit | Feature | |
| Bit 15-0 | Set UPC-E Code ID ASCII value of one or two English letters (lower or upper case) | |
| Register | <i>0x00B3, 0x00B2</i> | |
| Bit | Feature | |
| Bit 15-0 | Set UPC-A Code ID ASCII value of one or two English letters (lower or upper case) | |
| Register | <i>0x00B5, 0x00B4</i> | |
| Bit | Feature | |
| Bit 15-0 | Set Interleaved 2 of 5 Code ID ASCII value of one or two English letters (lower or upper case) | |
| Register | <i>0x00B7, 0x00B6</i> | |
| Bit | Feature | |
| Bit 15-0 | Set ITF-6 Code ID ASCII value of one or two English letters (lower or upper case) | |



W010F00

Exit Setup



| | |
|-----------------|--|
| Register | <i>0x00B9, 0x00B8</i> |
| Bit | Feature |
| Bit 15-0 | Set ITF-14 Code ID ASCII value of one or two English letters (lower or upper case) |
| Register | <i>0x00BB, 0x00BA</i> |
| Bit | Feature |
| Bit 15-0 | Set Deutsche 14 Code ID ASCII value of one or two English letters (lower or upper case) |
| Register | <i>0x00BD, 0x00BC</i> |
| Bit | Feature |
| Bit 15-0 | Set Deutsche 12 Code ID ASCII value of one or two English letters (lower or upper case) |
| Register | <i>0x00BF, 0x00BE</i> |
| Bit | Feature |
| Bit 15-0 | Set Matrix 2 of 5 Code ID ASCII value of one or two English letters (lower or upper case) |
| Register | <i>0x00C1, 0x00C0</i> |
| Bit | Feature |
| Bit 15-0 | Set Industrial 25 Code ID ASCII value of one or two English letters (lower or upper case) |
| Register | <i>0x00C3, 0x00C2</i> |
| Bit | Feature |
| Bit 15-0 | Set Standard 25 Code ID ASCII value of one or two English letters (lower or upper case) |
| Register | <i>0x00C5, 0x00C4</i> |
| Bit | Feature |
| Bit 15-0 | Set Code 39 Code ID ASCII value of one or two English letters (lower or upper case) |





W010F01

** Enter Setup

| | |
|-----------------|--|
| Register | <i>0x00C7, 0x00C6</i> |
| Bit | Feature |
| Bit 15-0 | Set Codabar Code ID ASCII value of one or two English letters (lower or upper case) |
| Register | <i>0x00C9, 0x00C8</i> |
| Bit | Feature |
| Bit 15-0 | Set Code 93 Code ID ASCII value of one or two English letters (lower or upper case) |
| Register | <i>0x00CB, 0x00CA</i> |
| Bit | Feature |
| Bit 15-0 | Set Code 11 Code ID ASCII value of one or two English letters (lower or upper case) |
| Register | <i>0x00CD, 0x00CC</i> |
| Bit | Feature |
| Bit 15-0 | Set Plessey Code ID ASCII value of one or two English letters (lower or upper case) |
| Register | <i>0x00CF, 0x00CE</i> |
| Bit | Feature |
| Bit 15-0 | Set MSI-Plessey Code ID ASCII value of one or two English letters (lower or upper case) |
| Register | <i>0x00D1, 0x00D0</i> |
| Bit | Feature |
| Bit 15-0 | Set RSS-14 Code ID ASCII value of one or two English letters (lower or upper case) |
| Register | <i>0x00D3, 0x00D2</i> |
| Bit | Feature |
| Bit 15-0 | Set RSS-Limited Code ID ASCII value of one or two English letters (lower or upper case) |
| Register | <i>0x00D5, 0x00D4</i> |
| Bit | Feature |
| Bit 15-0 | Set RSS-Expand Code ID ASCII value of one or two English letters (lower or upper case) |



W010F00

Exit Setup



Enable/Disable Barcode Programming

Scanning the **Enter Setup/Exit Setup** barcode can enable/disable barcode programming. After barcode programming is enabled, you can scan a number of programming barcodes to configure your scanner.

Barcode programming is on by default. In real application, programming barcodes hardly overlap with non-programming barcodes, so it is unnecessary to disable barcode programming each time you finish the configuration.

Programming Barcode Data

Programming barcode data (e.g. WFFD980) can be transmitted to the Host. To enable this feature, scan the appropriate barcode below. By default, the scanner does not transmit programming barcode data.

When the scanner is powered down or rebooted, this feature will be automatically disabled (i.e. the scanner does not transmit programming barcode data).



Transmit Programming Barcode Data



** Do Not Transmit Programming Barcode Data





Factory Defaults

Scanning the following barcode can restore the scanner to the factory defaults.

You may need to reset your scanner when:

1. scanner is not properly configured so that it fails to decode barcodes;
2. you forget previous configuration and want to avoid its impact;
3. functions that are rarely used have been enabled for the time being.






Scan Mode

Manual Mode

Manual Mode (default): A trigger pull activates a decode session. The decode session continues until the barcode is decoded or the trigger is released or the decode session timeout expires.



Decode Session Timeout: This parameter sets the maximum time decode session continues during a scan attempt. It is programmable in 1s increments from 1s to 255s. The default timeout is 15s. If the parameter is set to 0, the decode session timeout is infinite.



Example: Set the decode session timeout to 5s

1. Scan the **Enter Setup** barcode.
2. Scan the **Decode Session Timeout** barcode.
3. Scan the numeric barcode "5". (See the **Digit Barcodes** section in Appendix)
4. Scan the **Save** barcode. (See the **Save/Cancel Barcodes** section in Appendix)
5. Scan the **Exit Setup** barcode.






Continuous Mode

Continuous Mode: A trigger press activates the scanner to scan and decode at user-specified intervals, i.e. the timeout between decodes. Each decode session lasts until barcode is decoded or the decode session timeout expires. To suspend/resume the operation, simply press the trigger. By default, the scanner rereads same barcode with no delay.



Decode Session Timeout: This parameter sets the maximum time decode session continues during a scan attempt. It is programmable in 1s increments from 1s to 255s. The default timeout is 15s. If the parameter is set to 0, the decode session timeout is infinite.



Example: Set the decode session timeout to 5s

1. Scan the **Enter Setup** barcode.
2. Scan the **Decode Session Timeout** barcode.
3. Scan the numeric barcode "5". (See the **Digit Barcodes** section in Appendix)
4. Scan the **Save** barcode. (See the **Save/Cancel Barcodes** section in Appendix)





5. Scan the **Exit Setup** barcode.

Timeout between Decodes: This parameter sets the timeout between decode sessions. When a decode session ends, next session will not happen until the timeout between decodes expires. It is programmable in 0.1s increments from 0.0s to 25.5s. The default timeout is 1.0s.



Timeout between Decodes

Example: Set the timeout between decodes to 5s

1. Scan the **Enter Setup** barcode.
2. Scan the **Timeout between Decodes** barcode.
3. Scan the numeric barcodes "5" and "0". (See the **Digit Barcodes** section in Appendix)
4. Scan the **Save** barcode. (See the **Save/Cancel Barcodes** section in Appendix)
5. Scan the **Exit Setup** barcode.





Reread Delay sets the time period before the scanner can read the same barcode a second time. It protects against accidental rereads of the same barcode. This parameter is programmable in 0.1s increments from 0.1s to 25.5s. The default delay is 3.0s. If the parameter is set to 0, the delay is infinite.

Note: This parameter only applies when the **Reread Same Barcode with a Delay** is enabled.



Reread Same Barcode with No Delay: The scanner is allowed to reread same barcode, ignoring the reread delay.

Reread Same Barcode with a Delay: The scanner is not allowed to reread same barcode before the reread delay expires.

To disable rereads of same barcode, enable the **Reread Same Barcode with a Delay** and set the delay to 0.



**** Reread Same Barcode with No Delay**



Reread Same Barcode with a Delay

Example: Set the reread delay to 5s

1. Scan the **Enter Setup** barcode.
2. Scan the **Reread Delay** barcode.
3. Scan the numeric barcodes “5” and “0”. (See the **Digit Barcodes** section in Appendix)
4. Scan the **Save** barcode. (See the **Save/Cancel Barcodes** section in Appendix)
5. Scan the **Exit Setup** barcode.






Sense Mode

Sense Mode: The scanner activates a decode session every time when it detects a change in ambient illumination and meets the requirement of the image stabilization timeout. Decode session continues until barcode is decoded or the decode session timeout expires. A trigger pull can also activate a decode session. By default, the scanner rereads same barcode with no delay.



Decode Session Timeout: This parameter sets the maximum time decode session continues during a scan attempt. It is programmable in 1s increments from 1s to 255s. The default timeout is 15s. If the parameter is set to 0, the decode session timeout is infinite.



Example: Set the decode session timeout to 5s

1. Scan the **Enter Setup** barcode.
2. Scan the **Decode Session Timeout** barcode.
3. Scan the numeric barcode "5". (See the **Digit Barcodes** section in Appendix)
4. Scan the **Save** barcode. (See the **Save/Cancel Barcodes** section in Appendix)
5. Scan the **Exit Setup** barcode.





Image Stabilization Timeout: The scanner waits for the image stabilization timeout to expire before activating a decode session every time it detects a change in ambient illumination. This parameter is programmable in 0.1s increments from 0.0s to 25.5s. The default timeout is 0.4s.



Example: Set the Image Stabilization Timeout to 5s

1. Scan the **Enter Setup** barcode.
2. Scan the **Image Stabilization Timeout** barcode.
3. Scan the numeric barcodes “5” and “0”. (See the **Digit Barcodes** section in Appendix)
4. Scan the **Save** barcode. (See the **Save/Cancel Barcodes** section in Appendix)
5. Scan the **Exit Setup** barcode.





Reread Delay sets the time period before the scanner can read the same barcode a second time. It protects against accidental rereads of the same barcode. This parameter is programmable in 0.1s increments from 0.1s to 25.5s. The default delay is 3.0s. If the parameter is set to 0, the delay is infinite.

Note: This parameter only applies when the **Reread Same Barcode with a Delay** is enabled.



Reread Same Barcode with No Delay: The scanner is allowed to reread same barcode, ignoring the reread delay.

Reread Same Barcode with a Delay: The scanner is not allowed to reread same barcode before the reread delay expires.

To disable rereads of same barcode, enable the **Reread Same Barcode with a Delay** and set the delay to 0.



**** Reread Same Barcode with No Delay**



Reread Same Barcode with a Delay

Example: Set the reread delay to 5s

1. Scan the **Enter Setup** barcode.
2. Scan the **Reread Delay** barcode.
3. Scan the numeric barcodes “5” and “0”. (See the **Digit Barcodes** section in Appendix)
4. Scan the **Save** barcode. (See the **Save/Cancel Barcodes** section in Appendix)
5. Scan the **Exit Setup** barcode.





W010F01

** Enter Setup

Sensitivity: This parameter specifies the degree of acuteness of the scanner's response to changes in ambient illumination. The higher the sensitivity, the lower requirement in illumination change to trigger the scanner. You can select an appropriate degree of sensitivity that fits the ambient environment.



WFF0305

High Sensitivity



WFF0310

** Medium Sensitivity



WFF0330

** Medium Sensitivity



M00031A

Custom Sensitivity

Sensitivity levels range from 0 to 255. The smaller the number, the higher the sensitivity.

Example: Set the sensitivity level to 10

1. Scan the **Enter Setup** barcode.
2. Scan the **Custom Sensitivity** barcode.
3. Scan the numeric barcodes "1" and "0". (See the **Digit Barcodes** section in Appendix)
4. Scan the **Save** barcode. (See the **Save/Cancel Barcodes** section in Appendix)
5. Scan the **Exit Setup** barcode.



W010F00

Exit Setup



Command Trigger Mode

Command Trigger Mode: Decode session is activated by a host command. The decode session continues until the barcode is decoded or the decode session timeout expires.



W030001

Command Trigger Mode

Decode Session Timeout: This parameter sets the maximum time decode session continues during a scan attempt. It is programmable in 1s increments from 1s to 255s. The default timeout is 15s. If the parameter is set to 0, the decode session timeout is infinite.



M00031D

Decode Session Timeout

Example: Set the decode session timeout to 5s

1. Scan the **Enter Setup** barcode.
2. Scan the **Decode Session Timeout** barcode.
3. Scan the numeric barcode "5". (See the **Digit Barcodes** section in Appendix)
4. Scan the **Save** barcode. (See the **Save/Cancel Barcodes** section in Appendix)
5. Scan the **Exit Setup** barcode.





W010F01

** Enter Setup

Security Level

This parameter specifies the number of times to decode a barcode during a scan attempt. The higher the security level, the lower the error rate and decoding efficiency.



W030A00

** Set Security Level to 0



W030A01

Set Security Level to 1



W030A02

Set Security Level to 2



W030A03

Set Security Level to 3



W010F00

Exit Setup



W010F01

** Enter Setup

Good Read Beep



W041204

** Good Read Beep On



W041200

Good Read Beep Off



W010F00

Exit Setup



W010F01

** Enter Setup

Good Read Beep Frequency



WFF10DA

Low



WFF104B

** Medium



WFF1025

High

Good Read Beep Duration



WFF111F

40ms



WFF113E

**80ms



WFF115D

120ms



W010F00

Exit Setup



Decode Result Notification

When enabled, if a barcode does not decode, “F” is transmitted; if a barcode is decoded, “S” is appended to the barcode data as the most left character.



W203120

Enable Decode Result Notification



W203100

** Disable Decode Result Notification





W010F01
** Enter Setup

Other Settings

You can change the following parameter settings temporarily and the changes will be lost when you power down or reboot the scanner.

Silent Mode



W400000
Silent Mode On



W400040
** Silent Mode Off

Note: This feature is only applicable to decode beep and will be automatically disabled when the scanner is powered down or rebooted.

Illumination



W0C0000
Off



W0C0008
Always On



W0C0004
** On When Scanning



W010F00
Exit Setup



Chapter 3 Communication Settings

Introduction

The scanner provides a USB interface to communicate with the host device. The host device can receive scanned data and send commands to control the scanner or to access/alter the configuration information of the scanner via the USB interface.

USB HID-KBW





W010F01

** Enter Setup

Standard Keyboard

When the USB HID-KBW feature is enabled, the scanner selects **Standard Keyboard** by default. Besides that, the other two options are provided: **Emulate ALT+Keypad** and **Function Key Mapping**.



W031A00

** Standard Keyboard

Emulate ALT+Keypad

When **Emulate ALT+Keypad** is enabled, any ASCII character (0x00 - 0xFF) is sent over the numeric keypad no matter which keyboard type is selected. Since sending a character involves multiple keystroke emulations, this method appears less efficient.

1. ALT Make
2. Enter the number corresponding to the ASCII character on the keypad.
3. ALT Break



W031A03

Emulate ALT+Keypad

Note: It is recommended to turn on the Num Lock light on the host when using this feature.



W010F00

Exit Setup



Function Key Mapping

When **Function Key Mapping** is enabled, function character (0x00 - 0x1F) are sent as ASCII sequences over the numeric keypad.

1. CTRL Make
2. Press function key (Refer to the **ASCII Function Key Mapping Table** on the following page)
3. CTRL Break



W031A01
Function Key Mapping





W010F01

** Enter Setup

ASCII Function Key Mapping Table

| ASCII Value (HEX) | Function Key | ASCII Value (HEX) | Function Key |
|----------------------|--------------|----------------------|--------------|
| 00 | 2 | 10 | P |
| 01 | A | 11 | Q |
| 02 | B | 12 | R |
| 03 | C | 13 | S |
| 04 | D | 14 | T |
| 05 | E | 15 | U |
| 06 | F | 16 | V |
| 07 | G | 17 | W |
| 08 | H | 18 | X |
| 09 | I | 19 | Y |
| 0A | J | 1A | Z |
| 0B | K | 1B | [|
| 0C | L | 1C | \ |
| 0D | M | 1D |] |
| 0E | N | 1E | 6 |
| 0F | O | 1F | . |



W010F00

Exit Setup

USB Country Keyboard Types

Keyboard layouts vary from country to country. All supported keyboard types are listed below.



WFF1900

** 1 - U.S.



WFF1901

2 - Belgium



WFF1902

3 - Brazil



WFF1903

4 - Canada



WFF1904

5 - Czech



WFF1905

6 - Denmark



WFF1906

7 - Finland



WFF1907

8 - France



W010F01

** Enter Setup



WFF1908

9 - Austria



WFF1909

10 - Greece



WFF190A

11 - Hungary



WFF190B

12 - Israel



WFF190C

13 - Italy



WFF190D

14 - Latin America



WFF190E

15 - Netherland



WFF190F

16 - Norway



WFF1910

17 - Poland



WFF1911

18 - Portugal



W010F00

Exit Setup



W010F01

** Enter Setup



WFF1912

19 - Romania



WFF1913

20 - Russia



WFF1915

21 - Slovakia



WFF1916

22 - Spain



WFF1917

23 - Sweden



WFF1918

24 - Switzerland



WFF1919

25 - Turkey1



WFF191A

26 - Turkey2



WFF191B

27 - UK



WFF191C

28 - Japan



W010F00

Exit Setup



W010F01
** Enter Setup

Inter-Keystroke Delay

This parameter specifies the delay between emulated keystrokes.



WC01A00
** No Delay



WC01A40
Short Delay (5ms)



WC01A80
Medium Delay (10ms)



WC01AC0
Long Delay (15ms)



W010F00
Exit Setup



Convert Case

This parameter is valid when the **Standard Keyboard** or **Function Key Mapping** is enabled.



W381A00

** No Case Conversion



W381A20

Convert All to Upper Case



W381A30

Convert All to Lower Case



W381A08

Invert Upper and Lower Case Characters

Example: When the **Convert All to Lower Case** feature is enabled, barcode data “AbC” is transmitted as “abc”.





W010F01

** Enter Setup

Emulate Numeric Keypad

When this feature is disabled, sending barcode data is emulated as keystroke(s) on main keyboard.

To enable this feature, scan the **Emulate Numeric Keypad** barcode. Sending a number (0-9) is emulated as keystroke on numeric keypad, whereas sending other character like "+", "_", "*", "/" and "." is still emulated as keystroke on main keyboard. However, this feature is influenced by the state of the Num Lock key on the host: if the Num Lock light on the host is ON, numbers are sent over numeric keypad, if it is OFF, numbers are sent over main keyboard.



W041A04

Emulate Numeric Keypad



W041A00

** Do Not Emulate Numeric Keypad

Note: Make sure the Num Lock light of the Host is turned ON when using this feature.

Emulate ALT+Keypad ON prevails over **Emulate Numeric Keypad**.



W010F00

Exit Setup



USB COM Port Emulation

This feature allows the host to receive data in the way as a serial port does. However, you need to set communication parameters on the scanner to match the Host requirements. A driver is required for this feature.





W010F01
** Enter Setup

USB DataPipe

A driver is required when using this protocol to communicate with the scanner.



W070900

USB DataPipe



W010F00
Exit Setup



HID-POS

The HID-POS interface is recommended for new application programs. It can send up to 56 characters in a single USB report and appears more efficient than USB HID-KBW.

Features:

- ✧ HID based, no custom driver required.
- ✧ Way more efficient in communication than USB HID-KBW and traditional RS-232 interface.

Note: HID-POS does not require a custom driver. However, a HID interface on Windows 98 does. All HID interfaces employ standard driver provided by the operating system. Use defaults when installing the driver.





Access the Scanner with Your Program

1. Use CreateFile to access the scanner as a HID device.
2. Use ReadFile to deliver the scanned data to the application program.
3. Use WriteFile to send data to the scanner.

For detailed information about USB and HID interfaces, go to www.USB.org.

Acquire Scanned Data

After a barcode is decoded, the scanner sends an input report as below:

| | Bit | | | | | | | |
|-------|---|---|---|---|---|---|---|---|
| Byte | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| 0 | Report ID = 02 | | | | | | | |
| 1 | Barcode Length | | | | | | | |
| 2-57 | Decoded Data (1-56) | | | | | | | |
| 58-61 | Reserved (1-4) | | | | | | | |
| 62 | 00 | | | | | | | |
| 63 | 00 (no data continued) or 01 (data continued) | | | | | | | |

VID/PID

USB uses VID (Vendor ID) and PID (Product ID) to identify and locate a device. The VID is assigned by USB Implementers Forum. Newland's vendor ID is 1EAB (Hex). A range of PIDs are used for each Newland product family. Every PID contains a base number and interface type (keyboard, COM port, etc.).

| Product | Interface | PID (Hex) | PID (Dec) |
|------------------------|------------------------|-----------|-----------|
| HR12XX-7X HR12XX-9X | USB DataPipe | 8001 | 32769 |
| | USB HID-KBW | 8003 | 32771 |
| | USB COM Port Emulation | 8006 | 32774 |
| | HID-POS | 8010 | 32784 |





Chapter 4 Data Formatting

Introduction

After a successful barcode read, a string containing numbers, letters or symbols will be returned.

In real applications, barcode data may be found insufficient for your needs. You may wish to include additional information such as barcode type, data acquisition time or delimiter in data being scanned.

Adding extra information to printed barcodes does not seem like a sensible solution since that will increase the barcode size and make them inflexible. Instead, we come up with the idea of appending prefix and suffix to the data without making any change to barcodes. We will show you how to conduct the configuration in the following sections.

Note: Customized data: <Prefix> <Data><Suffix><Terminating Character>

Prefix Sequence





Custom Prefix

Enable/Disable Custom Prefix

If custom prefix is enabled, you are allowed to append to the data a user-defined prefix that cannot exceed 5 characters.

For example, if barcode data is “123” and custom prefix is “AB”, the Host will receive “AB123”.



W043104
Enable Custom Prefix



W043100
** Disable Custom Prefix

Set Custom Prefix

To set a custom prefix, scan the **Set Custom Prefix** barcode, the numeric barcodes corresponding to the hexadecimal value of a desired prefix and the **Save** barcode.

Note: A custom prefix cannot exceed 5 characters.



M000100
Set Custom Prefix

Example: Set the custom prefix to “CODE” (its hexadecimal value is 0x43/0x4F/0x44/0x45)

1. Scan the **Enter Setup** barcode.
2. Scan the **Set Custom Prefix** barcode.
3. Scan the numeric barcodes “4”, “3”, “4”, “F”, “4”, “4”, “4” and “5”. (See the **Digit Barcodes** section in Appendix)
4. Scan the **Save** barcode. (See the **Save/Cancel Barcodes** section in Appendix)
5. Scan the **Enable Custom Prefix** barcode.
6. Scan the **Exit Setup** barcode.





AIM ID Prefix

AIM (Automatic Identification Manufacturers) ID defines symbology identifier (For the details, see the **AIM ID Table** section in Appendix). If AIM ID prefix is enabled, the scanner will add the symbology identifier before the scanned data after decoding.



W186018
Enable AIM ID Prefix



W186000
** Disable AIM ID Prefix





CODE ID Prefix

Code ID can also be used to identify barcode type. Unlike AIM ID, Code ID is user programmable. For the information of default Code ID, see the **Code ID Table** section in Appendix.



Restore All Default Code IDs



Set Code ID

Code ID can only consist of one or two English letters. To set a Code ID, scan a **Set Code ID** barcode, the numeric barcodes corresponding to the hexadecimal value of a desired ID and the **Save** barcode.

Example: Set the Code ID of Code 128 to “p” (its hexadecimal value is 0x70)

1. Scan the **Enter Setup** barcode.
2. Scan the **Set Code 128 Code ID** barcode. (See the barcode on the following page)
3. Scan the numeric barcodes “7” and “0”. (See the **Digit Barcodes** section in Appendix)
4. Scan the **Save** barcode. (See the **Save/Cancel Barcodes** section in Appendix)
5. Scan the **Exit Setup** barcode.





Set Code ID Barcodes



M000200
Set Code 128 Code ID



M000201
Set UCC/EAN-128 Code ID



M000202
Set AIM 128 Code ID



M000204
Set EAN-8 Code ID



M000205
Set EAN-13 Code ID



M000206
Set ISSN Code ID



M000207
Set ISBN Code ID



M000208
Set UPC-E Code ID





W010F01
** Enter Setup

Set Code ID Barcodes (continued)



M000209
Set UPC-A Code ID



M00020A
Set Interleaved 2 of 5 Code ID



M00020B
Set ITF-6 Code ID



M00020C
Set ITF-14 Code ID



M00020D
Set Deutsche 14 Code ID



M00020E
Set Deutsche 12 Code ID



M00020F
Set Matrix 2 of 5 Code ID



M000210
Set Industrial 25 Code ID



W010F00
Exit Setup



Set Code ID Barcodes (continued)



M000211

Set Standard 25 Code ID



M000212

Set Code 39 Code ID



M000213

Set Codabar Code ID



M000214

Set Code 93 Code ID



M000215

Set Code 11 Code ID



M000216

Set Plessey Code ID



M000217

Set MSI-Plessey Code ID



M000218

Set RSS-14 Code ID



M000219

Set RSS-Limited Code ID



M00021A

Set RSS-Expand Code ID





Custom Suffix

Enable/Disable Custom Suffix

If custom suffix is enabled, you are allowed to append to the data a user-defined suffix that cannot exceed 5 characters.

For example, if barcode data is “123” and custom suffix is “AB”, the Host will receive “123AB”.





Set Custom Suffix

To set a custom suffix, scan the **Set Custom Suffix** barcode, the numeric barcodes corresponding to the hexadecimal value of a desired suffix and the **Save** barcode.

Note: A custom suffix cannot exceed 5 characters.



Example: Set the custom suffix to “AGE” (its hexadecimal value is 0x41/0x47/0x45)

1. Scan the **Enter Setup** barcode.
2. Scan the **Set Custom Suffix** barcode.
3. Scan the numeric barcodes “4” “1” “4” “7” “4” and “5”. (See the **Digit Barcodes** section in Appendix)
4. Scan the **Save** barcode. (See the **Save/Cancel Barcodes** section in Appendix)
5. Scan the **Enable Custom Suffix** barcode.
6. Scan the **Exit Setup** barcode.





W010F01
** Enter Setup

Terminating Character Suffix

A terminating character, such as carriage return (CR) and line feed (LF), can be used to mark the end of data, which means nothing can be added after it.

A terminating character suffix cannot exceed 5 characters.

Enable/Disable Terminating Character Suffix

To enable/disable terminating character suffix, scan the appropriate barcode below.



W103110
** Enable Terminating Character Suffix



W103100
Disable Terminating Character Suffix



W010F00
Exit Setup



Set Terminating Character Suffix

The scanner provides a shortcut for setting the terminating character suffix to 0x0D (CR) or 0x0D,0x0A (CRLF) or 0x09 (Horizontal Tab) by scanning the following barcode.



Terminating Character 0x0D



** Terminating Character 0x0D,0x0A



Terminating Character 0x09



Set Terminating Character Suffix

To set other terminating character suffix, scan the **Set Terminating Character Suffix** barcode, the numeric barcodes corresponding to the hexadecimal value of a desired terminating character, and the **Save** barcode.

Note: A terminating character suffix cannot exceed 5 characters.

Example: Set the terminating character suffix to 0x0A

1. Scan the **Enter Setup** barcode.
2. Scan the **Set Terminating Character Suffix** barcode.
3. Scan the numeric barcodes "0" and "A". (See the **Digit Barcodes** section in Appendix)
4. Scan the **Save** barcode. (See the **Save/Cancel Barcodes** section in Appendix)
5. Scan the **Enable Terminating Character Suffix** barcode.
6. Scan the **Exit Setup** barcode.





Chapter 5 Symbolologies

Introduction

Every symbology (barcode type) has its own unique attributes. This chapter provides programming barcodes for configuring the scanner so that it can identify various barcode symbologies. It is recommended to disable those that are rarely used to increase the efficiency of the scanner.

Global Settings

Enable/Disable All Symbolologies

If all symbologies are disabled, the scanner can only identify programming barcodes.



WFFD981
Enable All Symbolologies



WFFD982
Disable All Symbolologies





W010F01
** Enter Setup

Code 128

Restore Factory Defaults



WFFD990

Restore the Factory Defaults of Code 128

Enable/Disable Code 128



W016101

** Enable Code 128



W016100

Disable Code 128



W010F00
Exit Setup



Set Length Range for Code 128

The scanner can be configured to only decode Code 128 barcodes with lengths that fall between (inclusive) the minimum and maximum lengths.

The supported maximum length is 255 characters. If minimum length is set to be greater than maximum length, the scanner only decodes Code 128 barcodes with either the minimum or maximum length. If minimum length is same as maximum length, only Code 128 barcodes with that length are to be decoded.



M000301

Set the Minimum Length



M000300

Set the Maximum Length

Example: Set the scanner to decode Code128 barcodes containing between 8 and 12 characters

1. Scan the **Enter Setup** barcode.
2. Scan the **Set the Minimum Length** barcode.
3. Scan the numeric barcode "8". (See the **Digit Barcodes** section in Appendix)
4. Scan the **Save** barcode. (See the **Save/Cancel Barcodes** section in Appendix)
5. Scan the **Set the Maximum Length** barcode.
6. Scan the numeric barcodes "1" and "2".
7. Scan the **Save** barcode.
8. Scan the **Exit Setup** barcode.





W010F01
** Enter Setup

UCC/EAN-128

Restore Factory Defaults



WFFD991

Restore the Factory Defaults of UCC/EAN-128

Enable/Disable UCC/EAN-128



W036203

** Enable UCC/EAN-128



W036200

Disable UCC/EAN-128



W036201

Decode as Code 128



W010F00
Exit Setup



Set Length Range for UCC/EAN-128

The scanner can be configured to only decode UCC/EAN-128 barcodes with lengths that fall between (inclusive) the minimum and maximum lengths.

The supported maximum length is 255 characters. If minimum length is set to be greater than maximum length, the scanner only decodes UCC/EAN-128 barcodes with either the minimum or maximum length. If minimum length is same as maximum length, only UCC/EAN-128 barcodes with that length are to be decoded.



M000303

Set the Minimum Length



M000302

Set the Maximum Length

Example: Set the scanner to decode UCC/EAN-128 barcodes containing between 8 and 12 characters

1. Scan the **Enter Setup** barcode.
2. Scan the **Set the Minimum Length** barcode.
3. Scan the numeric barcode "8". (See the **Digit Barcodes** section in Appendix)
4. Scan the **Save** barcode. (See the **Save/Cancel Barcodes** section in Appendix)
5. Scan the **Set the Maximum Length** barcode.
6. Scan the numeric barcodes "1" and "2".
7. Scan the **Save** barcode.
8. Scan the **Exit Setup** barcode.





W010F01
** Enter Setup

AIM 128

Restore Factory Defaults



WFFD992
Restore the Factory Defaults of AIM 128

Enable/Disable AIM 128



W036302
Enable AIM 128



W036300
** Disable AIM 128



W036301
Decode as Code 128



W010F00
Exit Setup



Set Length Range for AIM 128

The scanner can be configured to only decode AIM 128 barcodes with lengths that fall between (inclusive) the minimum and maximum lengths.

The supported maximum length is 255 characters. If minimum length is set to be greater than maximum length, the scanner only decodes AIM 128 barcodes with either the minimum or maximum length. If minimum length is same as maximum length, only AIM 128 barcodes with that length are to be decoded.



M000305

Set the Minimum Length



M000304

Set the Maximum Length

Example: Set the scanner to decode AIM128 barcodes containing between 8 and 12 characters

1. Scan the **Enter Setup** barcode.
2. Scan the **Set the Minimum Length** barcode.
3. Scan the numeric barcode "8". (See the **Digit Barcodes** section in Appendix)
4. Scan the **Save** barcode. (See the **Save/Cancel Barcodes** section in Appendix)
5. Scan the **Set the Maximum Length** barcode.
6. Scan the numeric barcodes "1" and "2".
7. Scan the **Save** barcode.
8. Scan the **Exit Setup** barcode.





W010F01
** Enter Setup

EAN-8

Restore Factory Defaults



WFFD994
Restore the Factory Defaults of EAN-8

Enable/Disable EAN-8



W016501
** Enable EAN-8



W016500
Disable EAN-8

Transmit Check Digit

EAN-8 is 8 digits in length with the last one as its check digit used to verify the integrity of the data.



W046504
** Transmit EAN-8 Check Digit



W046500
Do Not Transmit EAN-8 Check Digit



W010F00
Exit Setup



Add-On Code

An EAN-8 barcode can be augmented with a two-digit or five-digit add-on code to form a new one. In the examples below, the part surrounded by blue dotted line is an EAN-8 barcode while the part circled by red dotted line is add-on code.



W106510

Enable 2-Digit Add-On Code



W106500

** Disable 2-Digit Add-On Code



W206520

Enable 5-Digit Add-On Code



W206500

** Disable 5-Digit Add-On Code

Enable 2-Digit Add-On Code/ Enable 5-Digit Add-On Code: The scanner decodes a mix of EAN-8 barcodes with and without 2-digit/5-digit add-on codes.

Disable 2-Digit Add-On Code/ Disable 5-Digit Add-On Code: The scanner decodes EAN-8 and ignores the add-on code when presented with an EAN-8 plus add-on barcode. It can also decode EAN-8 barcodes without add-on codes.





Add-On Code Required

This parameter is only valid when **Enable 2-Digit Add-On Code** and/or **Enable 5-Digit Add-On Code** is selected.



W086508

EAN-8 Add-On Code Required



W086500

** EAN-8 Add-On Code Not Required

EAN-8 Extension

Disable EAN-8 Zero Extend: Transmit EAN-8 barcodes as is.

Enable EAN-8 Zero Extend: Add five leading zeros to decoded EAN-8 barcodes to extend to 13 digits.

Convert EAN-8 to EAN-13: Add five leading zeros to decoded EAN-8 barcodes to make them compatible in format to EAN-13 barcodes.



WC06540

Enable EAN-8 Zero Extend



WC06500

** Disable EAN-8 Zero Extend



WC06580

Convert EAN-8 to EAN-13





W010F01
** Enter Setup

EAN-13

Restore Factory Defaults



' WFFD995
Restore the Factory Defaults of EAN-13

Enable/Disable EAN-13



W016601
** Enable EAN-13



W016600
Disable EAN-13

Transmit Check Digit

EAN-13 is 13 digits in length with the last one as its check digit used to verify the integrity of the data.



W046604
** Transmit EAN-13 Check Digit



W046600
Do Not Transmit EAN-13 Check Digit



W010F00
Exit Setup



Add-On Code

An EAN-13 barcode can be augmented with a two-digit or five-digit add-on code to form a new one. In the examples below, the part surrounded by blue dotted line is an EAN-13 barcode while the part circled by red dotted line is add-on code.



W106610

Enable 2-Digit Add-On Code



W106600

** Disable 2-Digit Add-On Code



W206620

Enable 5-Digit Add-On Code



W206600

** Disable 5-Digit Add-On Code

Enable 2-Digit Add-On Code/ Enable 5-Digit Add-On Code: The scanner decodes a mix of EAN-13 barcodes with and without 2-digit/5-digit add-on codes.

Disable 2-Digit Add-On Code/ Disable 5-Digit Add-On Code: The scanner decodes EAN-13 and ignores the add-on code when presented with an EAN-13 plus add-on barcode. It can also decode EAN-13 barcodes without add-on codes.





W010F01

** Enter Setup

Add-On Code Required

This parameter is only valid when **Enable 2-Digit Add-On Code** and/or **Enable 5-Digit Add-On Code** is selected.



W086608

EAN-13 Add-On Code Required



W086600

** EAN-13 Add-On Code Not Required



W010F00

Exit Setup



W010F01
** Enter Setup

ISSN

Restore Factory Defaults



WFFD996
Restore the Factory Defaults of ISSN

Enable/Disable ISSN



W036702
Enable ISSN



W036700
** Disable ISSN



W036701
Decode as EAN-13



W010F00
Exit Setup



W010F01
** Enter Setup

ISBN

Restore Factory Defaults



WFFD997
Restore the Factory Defaults of ISBN

Enable/Disable ISBN



W036802
Enable ISBN



W036800
** Disable ISBN



W036801
Decode as EAN-13



W010F00
Exit Setup



W010F01

** Enter Setup

Set ISBN Format



W086800

** ISBN-13



W086808

ISBN-10



W010F00

Exit Setup



W010F01
** Enter Setup

UPC-E

Restore Factory Defaults



WFFD998
Restore the Factory Defaults of UPC-E

Enable/Disable UPC-E



W016901
** Enable UPC-E



W016900
Disable UPC-E

Transmit Check Digit

UPC-E is 8 digits in length with the last one as its check digit used to verify the integrity of the data.



W046904
** Transmit UPC-E Check Digit



W046900
Do Not Transmit UPC-E Check Digit



W010F00
Exit Setup



Add-On Code

A UPC-E barcode can be augmented with a two-digit or five-digit add-on code to form a new one. In the examples below, the part surrounded by blue dotted line is a UPC-E barcode while the part circled by red dotted line is add-on code.



Enable 2-Digit Add-On Code/ Enable 5-Digit Add-On Code: The scanner decodes a mix of UPC-E barcodes with and without 2-digit/5-digit add-on codes.

Disable 2-Digit Add-On Code/ Disable 5-Digit Add-On Code: The scanner decodes UPC-E and ignores the add-on code when presented with a UPC-E plus add-on barcode. It can also decode UPC-E barcodes without add-on codes.





W010F01
** Enter Setup

Add-On Code Required

This parameter is only valid when **Enable 2-Digit Add-On Code** and/or **Enable 5-Digit Add-On Code** is selected.



W086908
UPC-E Add-On Code Required



W086900
** UPC-E Add-On Code Not Required

Transmit System Character

The first character of UPC-E barcode is the system character.



W306A10
Do Not Transmit System Character



W306A20
** Transmit System Character



W010F00
Exit Setup



UPC-E Extension

Disable UPC-E Extend: Transmit UPC-E barcodes as is.

Enable UPC-E Extend: Extend UPC-E barcodes to make them compatible in length to UPC-A.

Convert UPC-E to UPC-A: Extend UPC-E barcodes to make them compatible in format to UPC-A.



WC06940

Enable UPC-E Extend



WC06900

**Disable UPC-E Extend



WC06980

Convert UPC-E to UPC-A





W010F01

** Enter Setup

UPC-A

Restore Factory Defaults



WFFD999

Restore the Factory Defaults of UPC-A

Enable/Disable UPC-A



W036B02

** Enable UPC-A



W036B00

Disable UPC-A



W036B01

Decode as EAN-13



W010F00

Exit Setup



Transmit Check Digit

UPC-A is 13 digits in length with the last one as its check digit used to verify the integrity of the data.



W086B08

** Transmit UPC-A Check Digit



W086B00

Do Not Transmit UPC-A Check Digit

Transmit Preamble Character

Preamble characters (Country Code and System Character) can be transmitted as part of a UPC-A barcode. Select one of the following options for transmitting UPC-A preamble to the host device: transmit system character only, transmit system character and country code ("0" for USA), or transmit no preamble.



W036A00

No Preamble



W036A01

** System Character



W036A02

System Character & Country Code





Add-On Code

A UPC-A barcode can be augmented with a two-digit or five-digit add-on code to form a new one. In the examples below, the part surrounded by blue dotted line is a UPC-A barcode while the part circled by red dotted line is add-on code.



W206B20

Enable 2-Digit Add-On Code



W206B00

** Disable 2-Digit Add-On Code



W406B40

Enable 5-Digit Add-On Code



W406B00

** Disable 5-Digit Add-On Code

Enable 2-Digit Add-On Code/ Enable 5-Digit Add-On Code: The scanner decodes a mix of UPC-A barcodes with and without 2-digit/5-digit add-on codes.

Disable 2-Digit Add-On Code/ Disable 5-Digit Add-On Code: The scanner decodes UPC-A and ignores the add-on code when presented with a UPC-A plus add-on barcode. It can also decode UPC-A barcodes without add-on codes.





W010F01

** Enter Setup

Add-On Code Required

This parameter is only valid when **Enable 2-Digit Add-On Code** and/or **Enable 5-Digit Add-On Code** is selected.



W106B10

UPC-A Add-On Code Required



W106B00

** UPC-A Add-On Code Not Required



W010F00

Exit Setup



W010F01

** Enter Setup

Interleaved 2 of 5

Restore Factory Defaults



WFFD99A

Restore the Factory Defaults of Interleaved 2 of 5

Enable/Disable Interleaved 2 of 5



W016C01

** Enable Interleaved 2 of 5



W016C00

Disable Interleaved 2 of 5



W010F00

Exit Setup



Check Digit Verification

A check digit is optional for Interleaved 2 of 5 and can be added as the last digit. It is a calculated value used to verify the integrity of the data.

Disable: The scanner transmits Interleaved 2 of 5 barcodes as is.

Do Not Transmit Check Digit After Verification: The scanner checks the integrity of all Interleaved 2 of 5 barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the check will be transmitted except the last digit, whereas those failing it will not be transmitted.

Transmit Check Digit After Verification: The scanner checks the integrity of all Interleaved 2 of 5 barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the check will be transmitted, whereas those failing it will not be transmitted.



W0C6C00

Disable



W0C6C04

** Do Not Transmit Check Digit After Verification



W0C6C0C

Transmit Check Digit After Verification





Set Length Range for Interleaved 2 of 5

The scanner can be configured to only decode Interleaved 2 of 5 barcodes with lengths that fall between (inclusive) the minimum and maximum lengths.

The supported maximum length is 255 characters. If minimum length is set to be greater than maximum length, the scanner only decodes Interleaved 2 of 5 barcodes with either the minimum or maximum length. If minimum length is same as maximum length, only Interleaved 2 of 5 barcodes with that length are to be decoded.



M000307

Set the Minimum Length



M000306

Set the Maximum Length

Example: Set the scanner to decode Interleaved 2 of 5 barcodes containing between 8 and 12 characters

1. Scan the **Enter Setup** barcode.
2. Scan the **Set the Minimum Length** barcode.
3. Scan the numeric barcode "8". (See the **Digit Barcodes** section in Appendix)
4. Scan the **Save** barcode. (See the **Save/Cancel Barcodes** section in Appendix)
5. Scan the **Set the Maximum Length** barcode.
6. Scan the numeric barcodes "1" and "2".
7. Scan the **Save** barcode.
8. Scan the **Exit Setup** barcode.





ITF-6

ITF-6 is a special kind of Interleaved 2 of 5 with a length of 6 characters and the last character as the check character.

Restore Factory Defaults



WFFD99B

Restore the Factory Defaults of ITF-6

Enable/Disable ITF-6

By default, ITF-6 is decoded as Interleaved 2 of 5.



W036D01

Disable ITF-6



W0B6D02

Enable ITF-6 But Do Not Transmit Check Digit



W0B6D0A

Enable ITF-6 and Transmit Check Digit

Note: It is advised not to enable ITF-6 and Interleaved 2 of 5 at the same time.





W010F01
** Enter Setup

ITF-14

ITF-14 is a special kind of Interleaved 2 of 5 with a length of 14 characters and the last character as the check character.

Restore Factory Defaults



WFFD99C

Restore the Factory Defaults of ITF-14

Enable/Disable ITF-14

By default, ITF-14 is decoded as Interleaved 2 of 5.



W036E01

Disable ITF-14



W0B6E02

Enable ITF-14 But Do Not Transmit Check Digit



W0B6E0A

Enable ITF-14 and Transmit Check Digit

Note: It is advised not to enable ITF-14 and Interleaved 2 of 5 at the same time.



W010F00
Exit Setup



Deutsche 14

Restore Factory Defaults



WFFD99D

Restore the Factory Defaults of Deutsche 14

Enable/Disable Deutsche 14

By default, Deutsche 14 is decoded as Interleaved 2 of 5.



W036F01

Disable Deutsche 14



W0B6F02

Enable Deutsche 14 But Do Not Transmit Check Digit



W0B6F0A

Enable Deutsche 14 and Transmit Check Digit

Note: It is advised not to enable Deutsche 14 unless necessary, because Deutsche 14, ITF-14 and Interleaved 2 of 5 use the same encoding method and enabling them at the same time can easily cause confusion with each other when decoding.





W010F01
** Enter Setup

Deutsche 12

Restore Factory Defaults



WFFD99E

Restore the Factory Defaults of Deutsche 12

Enable/Disable Deutsche 12

By default, Deutsche 12 is decoded as Interleaved 2 of 5.



W037001

Disable Deutsche 12



W0B7002

Enable Deutsche 12 But Do Not Transmit Check Digit



W0B700A

Enable Deutsche 12 and Transmit Check Digit

Note: It is advised not to enable Deutsche 12 unless necessary, because Deutsche 12, ITF-12 and Interleaved 2 of 5 use the same encoding method and enabling them at the same time can easily cause confusion with each other when decoding.



W010F00
Exit Setup



W010F01

** Enter Setup

Matrix 2 of 5 (European Matrix 2 of 5)

Restore Factory Defaults



WFFD99F

Restore the Factory Defaults of Matrix 2 of 5

Enable/Disable Matrix 2 of 5



W017101

** Enable Matrix 2 of 5



W017100

Disable Matrix 2 of 5



W010F00

Exit Setup



W010F01

** Enter Setup

Check Digit Verification

A check digit is optional for Matrix 2 of 5 and can be added as the last digit. It is a calculated value used to verify the integrity of the data.

Disable: The scanner transmits Matrix 2 of 5 barcodes as is.

Do Not Transmit Check Digit After Verification: The scanner checks the integrity of all Matrix 2 of 5 barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the check will be transmitted except the last digit, whereas those failing it will not be transmitted.

Transmit Check Digit After Verification: The scanner checks the integrity of all Matrix 2 of 5 barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the check will be transmitted, whereas those failing it will not be transmitted.



W0C7100

** Disable



W0C7104

Do Not Transmit Check Digit After Verification



W0C710C

Transmit Check Digit After Verification



W010F00

Exit Setup



Set Length Range for Matrix 2 of 5

The scanner can be configured to only decode Matrix 2 of 5 barcodes with lengths that fall between (inclusive) the minimum and maximum lengths.

The supported maximum length is 255 characters. If minimum length is set to be greater than maximum length, the scanner only decodes Matrix 2 of 5 barcodes with either the minimum or maximum length. If minimum length is same as maximum length, only Matrix 2 of 5 barcodes with that length are to be decoded.



M000309

Set the Minimum Length



M000308

Set the Maximum Length

Example: Set the scanner to decode Matrix 2 of 5 barcodes containing between 8 and 12 characters

1. Scan the **Enter Setup** barcode.
2. Scan the **Set the Minimum Length** barcode.
3. Scan the numeric barcode "8". (See the **Digit Barcodes** section in Appendix)
4. Scan the **Save** barcode. (See the **Save/Cancel Barcodes** section in Appendix)
5. Scan the **Set the Maximum Length** barcode.
6. Scan the numeric barcodes "1" and "2".
7. Scan the **Save** barcode.
8. Scan the **Exit Setup** barcode.





W010F01
** Enter Setup

Industrial 25

Restore Factory Defaults



WFFD9A0
Restore the Factory Defaults of Industrial 25

Enable/Disable Industrial 25



W017201
** Enable Industrial 25



W017200
Disable Industrial 25



W010F00
Exit Setup



Check Digit Verification

A check digit is optional for Industrial 25 and can be added as the last digit. It is a calculated value used to verify the integrity of the data.

Disable: The scanner transmits Industrial 25 barcodes as is.

Do Not Transmit Check Digit After Verification: The scanner checks the integrity of all Industrial 25 barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the check will be transmitted except the last digit, whereas those failing it will not be transmitted.

Transmit Check Digit After Verification: The scanner checks the integrity of all Industrial 25 barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the check will be transmitted, whereas those failing it will not be transmitted.



Do Not Transmit Check Digit After Verification



Transmit Check Digit After Verification





Set Length Range for Industrial 25

The scanner can be configured to only decode Industrial 25 barcodes with lengths that fall between (inclusive) the minimum and maximum lengths.

The supported maximum length is 255 characters. If minimum length is set to be greater than maximum length, the scanner only decodes Industrial 25 barcodes with either the minimum or maximum length. If minimum length is same as maximum length, only Industrial 25 barcodes with that length are to be decoded.



M00030B

Set the Minimum Length



M00030A

Set the Maximum Length

Example: Set the scanner to decode Industrial 25 barcodes containing between 8 and 12 characters

1. Scan the **Enter Setup** barcode.
2. Scan the **Set the Minimum Length** barcode.
3. Scan the numeric barcode "8". (See the **Digit Barcodes** section in Appendix)
4. Scan the **Save** barcode. (See the **Save/Cancel Barcodes** section in Appendix)
5. Scan the **Set the Maximum Length** barcode.
6. Scan the numeric barcodes "1" and "2".
7. Scan the **Save** barcode.
8. Scan the **Exit Setup** barcode.





W010F01

** Enter Setup

Standard 25

Restore Factory Defaults



WFFD9A1

Restore the Factory Defaults of Standard 25

Enable/Disable Standard 25



W017301

** Enable Standard 25



W017300

Disable Standard 25



W010F00

Exit Setup



W010F01

** Enter Setup

Check Digit Verification

A check digit is optional for Standard 25 and can be added as the last digit. It is a calculated value used to verify the integrity of the data.

Disable: The scanner transmits Standard 25 barcodes as is.

Do Not Transmit Check Digit After Verification: The scanner checks the integrity of all Standard 25 barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the check will be transmitted except the last digit, whereas those failing it will not be transmitted.

Transmit Check Digit After Verification: The scanner checks the integrity of all Standard 25 barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the check will be transmitted, whereas those failing it will not be transmitted.



W0C7300

** Disable



W0C7304

Do Not Transmit Check Digit After Verification



W0C730C

Transmit Check Digit After Verification



W010F00

Exit Setup



Set Length Range for Standard 25

The scanner can be configured to only decode Standard 25 barcodes with lengths that fall between (inclusive) the minimum and maximum lengths.

The supported maximum length is 255 characters. If minimum length is set to be greater than maximum length, the scanner only decodes Standard 25 barcodes with either the minimum or maximum length. If minimum length is same as maximum length, only Standard 25 barcodes with that length are to be decoded.



M00030D

Set the Minimum Length



M00030C

Set the Maximum Length

Example: Set the scanner to decode Standard 25 barcodes containing between 8 and 12 characters

1. Scan the **Enter Setup** barcode.
2. Scan the **Set the Minimum Length** barcode.
3. Scan the numeric barcode "8". (See the **Digit Barcodes** section in Appendix)
4. Scan the **Save** barcode. (See the **Save/Cancel Barcodes** section in Appendix)
5. Scan the **Set the Maximum Length** barcode.
6. Scan the numeric barcodes "1" and "2".
7. Scan the **Save** barcode.
8. Scan the **Exit Setup** barcode.





W010F01

** Enter Setup

Code 39

Restore Factory Defaults



WFFD9A2

Restore the Factory Defaults of Code 39

Enable/Disable Code 39



W017401

** Enable Code 39



W017400

Disable Code 39



W010F00

Exit Setup



Check Digit Verification

A check digit is optional for Code 39 and can be added as the last digit. It is a calculated value used to verify the integrity of the data.

Disable: The scanner transmits Code 39 barcodes as is.

Do Not Transmit Check Digit After Verification: The scanner checks the integrity of all Code 39 barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the check will be transmitted except the last digit, whereas those failing it will not be transmitted.

Transmit Check Digit After Verification: The scanner checks the integrity of all Code 39 barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the check will be transmitted, whereas those failing it will not be transmitted.



Do Not Transmit Check Digit After Verification



Transmit Check Digit After Verification





W010F01
** Enter Setup

Transmit Start/Stop Characters

Code 39 uses an asterisk (*) for both the start and the stop characters. You can choose whether or not to transmit the start/stop characters by scanning the appropriate barcode below.



W047404

Transmit Start/Stop Characters



W047400

** Do Not Transmit Start/Stop Characters

Enable/Disable Code 39 Full ASCII

The scanner can be configured to identify all ASCII characters by scanning the appropriate barcode below.



W207420

** Enable Code 39 Full ASCII



W207400

Disable Code 39 Full ASCII



W010F00
Exit Setup



Set Length Range for Code 39

The scanner can be configured to only decode Code 39 barcodes with lengths that fall between (inclusive) the minimum and maximum lengths.

The supported maximum length is 255 characters. If minimum length is set to be greater than maximum length, the scanner only decodes Code 39 barcodes with either the minimum or maximum length. If minimum length is same as maximum length, only Code 39 barcodes with that length are to be decoded.



M00030F

Set the Minimum Length



MM00030E

Set the Maximum Length

Example: Set the scanner to decode Code 39 barcodes containing between 8 and 12 characters.

1. Scan the **Enter Setup** barcode.
2. Scan the **Set the Minimum Length** barcode.
3. Scan the numeric barcode "8". (See the **Digit Barcodes** section in Appendix)
4. Scan the **Save** barcode. (See the **Save/Cancel Barcodes** section in Appendix)
5. Scan the **Set the Maximum Length** barcode.
6. Scan the numeric barcode "1".
7. Scan the numeric barcode "2".
8. Scan the **Save** barcode.
9. Scan the **Exit Setup** barcode.





W010F01

** Enter Setup

Codabar

Restore Factory Defaults



WFFD9A3

Restore the Factory Defaults of Codabar

Enable/Disable Codabar



W017501

** Enable Codabar



W017500

Disable Codabar



W010F00

Exit Setup



Check Digit Verification

A check digit is optional for Codabar and can be added as the last digit. It is a calculated value used to verify the integrity of the data.

Disable: The scanner transmits Codabar barcodes as is.

Do Not Transmit Check Digit After Verification: The scanner checks the integrity of all Codabar barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the check will be transmitted except the last digit, whereas those failing it will not be transmitted.

Transmit Check Digit After Verification: The scanner checks the integrity of all Codabar barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the check will be transmitted, whereas those failing it will not be transmitted.



W607500

** Disable



W607520

Do Not Transmit Check Digit After Verification



W607560

Transmit Check Digit After Verification





W010F01
** Enter Setup

Start/Stop Characters



W047504

** Transmit Start/Stop Characters



W047500

Do Not Transmit Start/Stop Characters



W187500

** ABCD/ABCD as the Start/Stop Character



W187508

ABCD/TN*E as the Start/Stop Character



W187510

abcd/abcd as the Start/Stop Character



W187518

abcd/tn*e as the Start/Stop Character



W010F00
Exit Setup



Set Length Range for Codabar

The scanner can be configured to only decode Codabar barcodes with lengths that fall between (inclusive) the minimum and maximum lengths.

The supported maximum length is 255 characters. If minimum length is set to be greater than maximum length, the scanner only decodes Codabar barcodes with either the minimum or maximum length. If minimum length is same as maximum length, only Codabar barcodes with that length are to be decoded.



M000311

Set the Minimum Length



M000310

Set the Maximum Length

Example: Set the scanner to decode Codabar barcodes containing between 8 and 12 characters.

1. Scan the **Enter Setup** barcode.
2. Scan the **Set the Minimum Length** barcode.
3. Scan the numeric barcode "8". (See the **Digit Barcodes** section in Appendix)
4. Scan the **Save** barcode. (See the **Save/Cancel Barcodes** section in Appendix)
5. Scan the **Set the Maximum Length** barcode.
6. Scan the numeric barcode "1".
7. Scan the numeric barcode "2".
8. Scan the **Save** barcode.
9. Scan the **Exit Setup** barcode.





W010F01

** Enter Setup

Code 93

Restore Factory Defaults



WFFD9A4

Restore the Factory Defaults of Code 93

Enable/Disable Code 93



W017601

** Enable Code 93



W017600

Disable Code 93



W010F00

Exit Setup



Check Digit Verification

Check digits are optional for Code 93 and can be added as the last two digits, which are calculated values used to verify the integrity of the data.

Disable: The scanner transmits Code 93 barcodes as is.

Do Not Transmit Check Digit After Verification: The scanner checks the integrity of all Code 93 barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the checks will be transmitted except the last two digits, whereas those failing them will not be transmitted.

Transmit Check Digit After Verification: The scanner checks the integrity of all Code 93 barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the checks will be transmitted, whereas those failing them will not be transmitted.



W0C7600

Disable



W0C7604

**** Do Not Transmit Check Digit After Verification**



W0C760C

Transmit Check Digit After Verification





Set Length Range for Code 93

The scanner can be configured to only decode Code 93 barcodes with lengths that fall between (inclusive) the minimum and maximum lengths.

The supported maximum length is 255 characters. If minimum length is set to be greater than maximum length, the scanner only decodes Code 93 barcodes with either the minimum or maximum length. If minimum length is same as maximum length, only Code 93 barcodes with that length are to be decoded.



M000313

Set the Minimum Length



M000312

Set the Maximum Length

Example: Set the scanner to decode Code 93 barcodes containing between 8 and 12 characters.

1. Scan the **Enter Setup** barcode.
2. Scan the **Set the Minimum Length** barcode.
3. Scan the numeric barcode “8”. (See the **Digit Barcodes** section in Appendix)
4. Scan the **Save** barcode. (See the **Save/Cancel Barcodes** section in Appendix)
5. Scan the **Set the Maximum Length** barcode.
6. Scan the numeric barcode “1”.
7. Scan the numeric barcode “2”.
8. Scan the **Save** barcode.
9. Scan the **Exit Setup** barcode.





W010F01
** Enter Setup

Code 11

Restore Factory Defaults



WFFD9A5
Restore the Factory Defaults of Code 11

Enable/Disable Code 11



W017701
Enable Code 11



W017700
** Disable Code 11



W010F00
Exit Setup



W010F01
** Enter Setup

Check Digit Verification

Check digits are optional for Code 11 and can be added as the last one or two digits, which are calculated values used to verify the integrity of the data.

If the **Disable** option is enabled, the scanner transmits Code 11 barcodes as is.



W1C7700
Disable



W1C7704
** One Check Digit, MOD11



W1C7708
Two Check Digits, MOD11/MOD11



W1C770C
Two Check Digits, MOD11/MOD9



W1C7710
One Check Digit, MOD11 (Len <= 11)
Two Check Digits, MOD11/MOD11 (Len > 11)



W1C7714
One Check Digit, MOD11 (Len <= 11)
Two Check Digits, MOD11/MOD9 (Len > 11)



W207720
Transmit Check Digit



W207700
** Do Not Transmit Check Digit



W010F00
Exit Setup



Set Length Range for Code 11

The scanner can be configured to only decode Code 11 barcodes with lengths that fall between (inclusive) the minimum and maximum lengths.

The supported maximum length is 255 characters. If minimum length is set to be greater than maximum length, the scanner only decodes Code 11 barcodes with either the minimum or maximum length. If minimum length is same as maximum length, only Code 11 barcodes with that length are to be decoded.



M000315

Set the Minimum Length



M000314

Set the Maximum Length

Example: Set the scanner to decode Code 11 barcodes containing between 8 and 12 characters.

1. Scan the **Enter Setup** barcode.
2. Scan the **Set the Minimum Length** barcode.
3. Scan the numeric barcode "8". (See the **Digit Barcodes** section in Appendix)
4. Scan the **Save** barcode. (See the **Save/Cancel Barcodes** section in Appendix)
5. Scan the **Set the Maximum Length** barcode.
6. Scan the numeric barcode "1".
7. Scan the numeric barcode "2".
8. Scan the **Save** barcode.
9. Scan the **Exit Setup** barcode.





W010F01

** Enter Setup

Plessey

Restore Factory Defaults



WFFD9A6

Restore the Factory Defaults of Plessey

Enable/Disable Plessey



W017801

Enable Plessey



W017800

** Disable Plessey



W010F00

Exit Setup



Check Digit Verification

Check digits are optional for Plessey and can be added as the last one or two digits, which are calculated values used to verify the integrity of the data.

Disable: The scanner transmits Plessey barcodes as is.

Do Not Transmit Check Digit After Verification: The scanner checks the integrity of all Plessey barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the checks will be transmitted except the last two digits, whereas those failing them will not be transmitted.

Transmit Check Digit After Verification: The scanner checks the integrity of all Plessey barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the checks will be transmitted, whereas those failing them will not be transmitted.



** Do Not Transmit Check Digit After Verification



Transmit Check Digit After Verification





Set Length Range for Plessey

The scanner can be configured to only decode Plessey barcodes with lengths that fall between (inclusive) the minimum and maximum lengths.

The supported maximum length is 255 characters. If minimum length is set to be greater than maximum length, the scanner only decodes Plessey barcodes with either the minimum or maximum length. If minimum length is same as maximum length, only Plessey barcodes with that length are to be decoded.



M000317

Set the Minimum Length



M000316

Set the Maximum Length

Example: Set the scanner to decode Plessey barcodes containing between 8 and 12 characters.

1. Scan the **Enter Setup** barcode.
2. Scan the **Set the Minimum Length** barcode.
3. Scan the numeric barcode "8". (See the **Digit Barcodes** section in Appendix)
4. Scan the **Save** barcode. (See the **Save/Cancel Barcodes** section in Appendix)
5. Scan the **Set the Maximum Length** barcode.
6. Scan the numeric barcode "1".
7. Scan the numeric barcode "2".
8. Scan the **Save** barcode.
9. Scan the **Exit Setup** barcode.





W010F01

** Enter Setup

MSI-Plessey

Restore Factory Defaults



WFFD9A7

Restore the Factory Defaults of MSI-Plessey

Enable/Disable MSI-Plessey



W017901

Enable MSI-Plessey



W017900

** Disable MSI-Plessey



W010F00

Exit Setup



W010F01

** Enter Setup

Check Digit Verification

Check digits are optional for MSI-Plessey and can be added as the last one or two digits, which are calculated values used to verify the integrity of the data.

If the **Disable** option is enabled, the scanner transmits MSI-Plessey barcodes as is.



W0C7900

Disable



W0C7904

** One Check Digit, MOD10



W0C7908

Two Check Digits, MOD10/MOD10



W0C790C

Two Check Digits, MOD10/MOD11



W107910

Transmit Check Digit



W107900

** Do Not Transmit Check Digit



W010F00

Exit Setup



Set Length Range for MSI-Plessey

The scanner can be configured to only decode MSI-Plessey barcodes with lengths that fall between (inclusive) the minimum and maximum lengths.

The supported maximum length is 255 characters. If minimum length is set to be greater than maximum length, the scanner only decodes MSI-Plessey barcodes with either the minimum or maximum length. If minimum length is same as maximum length, only MSI-Plessey barcodes with that length are to be decoded.



M000319

Set the Minimum Length



M000318

Set the Maximum Length

Example: Set the scanner to decode MSI-Plessey barcodes containing between 8 and 12 characters.

1. Scan the **Enter Setup** barcode.
2. Scan the **Set the Minimum Length** barcode.
3. Scan the numeric barcode "8". (See the **Digit Barcodes** section in Appendix)
4. Scan the **Save** barcode. (See the **Save/Cancel Barcodes** section in Appendix)
5. Scan the **Set the Maximum Length** barcode.
6. Scan the numeric barcode "1".
7. Scan the numeric barcode "2".
8. Scan the **Save** barcode.
9. Scan the **Exit Setup** barcode.





W010F01
** Enter Setup

RSS-14

Restore Factory Defaults



WFFD9A8
Restore the Factory Defaults of RSS-14

Enable/Disable RSS-14



W017A01
** Enable RSS-14



W017A00
Disable RSS-14

Transmit Application Identifier "01"



W047A04
** Transmit Application Identifier "01"



W047A00
Do Not Transmit Application Identifier "01"



W010F00
Exit Setup



W010F01

** Enter Setup

RSS-Limited

Restore Factory Defaults



WFFD9A9

Restore the Factory Defaults of RSS-Limited

Enable/Disable RSS-Limited



W017B01

** Enable RSS-Limited



W017B00

Disable RSS-Limited

Transmit Application Identifier "01"



W047B04

** Transmit Application Identifier "01"



W047B00

Do Not Transmit Application Identifier "01"



W010F00

Exit Setup



W010F01

** Enter Setup

RSS-Expand

Restore Factory Defaults



WFFD9AA

Restore the Factory Defaults of RSS-Expand

Enable/Disable RSS-Expand



W017C01

** Enable RSS-Expand



W017C00

Disable RSS-Expand



W010F00

Exit Setup

Appendix

Factory Defaults Table

| Parameter | | Factory Default | Remark |
|----------------------------|-----------------------------|------------------|--|
| System Settings | | | |
| Barcode Programming | | Enabled | |
| Programming Barcode Data | | Do not send | |
| Scan Mode | | Manual Mode | |
| Manual Mode | Decode Session Timeout | 15s | 1-255s; 0: infinite. |
| Continuous Mode | Decode Session Timeout | 15s | 1-255s; 0: infinite. |
| | Timeout between Decodes | 1.0s | 0.0-25.5s |
| | Reread Same Barcode | With no delay | To disable rereads of same barcode, enable the Reread Same Barcode with a Delay and set the delay to 0. |
| Sense Mode | Decode Session Timeout | 15s | 1-255s; 0: infinite. |
| | Image Stabilization Timeout | 0.4s | 0.0-25.5s |
| | Reread Same Barcode | With no delay | To disable rereads of same barcode, enable the Reread Same Barcode with a Delay and set the delay to 0. |
| | Sensitivity | Medium | |
| Command Trigger Mode | Decode Session Timeout | 15s | 1-255s; 0: infinite. |
| Security Level | | 0 | |
| Good Read Beep | | Enabled | |
| Good Read Beep Frequency | | Medium | |
| Good Read Beep Duration | | 80ms | |
| Decode Result Notification | | Disabled | |
| Silent Mode | | Disabled | Temporary setting |
| Illumination | | On When Scanning | Temporary setting |

| Parameter | | Factory Default | Remark |
|-------------------------------|---------------------------|-----------------------|--|
| Communication Settings | | | |
| USB Interface | | USB HID-KBW | Other options: DataPipe, USB COM Port Emulation, HID-POS |
| USB HID-KBW | Input Mode | Standard Keyboard | |
| | USB Country Keyboard Type | U.S. | |
| | Inter-Keystroke Delay | No delay | |
| | Convert Case | No Conversion | |
| | Emulate Numeric Keypad | Disabled | |
| Data Formatting | | | |
| Prefix Sequence | | Code ID+Custom+AIM ID | |
| AIM ID Prefix | | Disabled | |
| Code ID Prefix | | Disabled | 1 or 2 English letters |
| Custom Prefix | | Disabled | 1 to 5 characters |
| Custom Suffix | | Disabled | 1 to 5 characters |
| Terminating Character Suffix | | Enabled, 0x0D,0x0A | 0x0D,0x0A: CRLF |

| Parameter | Factory Default | Remark |
|------------------------------|-----------------|--|
| Code 128 | | |
| Code 128 | Enabled | |
| Minimum Length | 1 | No less than 1 (including check digit) |
| Maximum Length | 80 | |
| UCC/EAN-128 (GS1-128) | | |
| UCC/EAN-128 | Enabled | |
| Minimum Length | 1 | No less than 1 (including check digit) |
| Maximum Length | 80 | |
| AIM 128 | | |
| AIM 128 | Disabled | |
| Minimum Length | 1 | No less than 1 (including check digit) |
| Maximum Length | 80 | |
| EAN-8 | | |
| EAN-8 | Enabled | |
| Check Digit | Transmit | |
| 2-Digit Add-On Code | Disabled | |
| 5-Digit Add-On Code | Disabled | |
| Add-On Code | Not required | |
| Extend to EAN-13 | Disabled | |
| EAN-13 | | |
| EAN-13 | Enabled | |
| Check Digit | Transmit | |
| 2-Digit Add-On Code | Disabled | |
| 5-Digit Add-On Code | Disabled | |
| Add-On Code | Not required | |
| ISSN | | |
| ISSN | Disabled | |
| ISBN | | |
| ISBN | Disabled | |
| ISBN Format | ISBN-13 | |

| Parameter | Factory Default | Remark |
|-----------------------------|------------------|--|
| UPC-E | | |
| UPC-E | Enabled | |
| Check Digit | Transmit | |
| 2-Digit Add-On Code | Disabled | |
| 5-Digit Add-On Code | Disabled | |
| Add-On Code | Not required | |
| Extend to UPC-A | Disabled | |
| System Character | Transmit | |
| UPC-A | | |
| UPC-A | Enabled | |
| Check Digit | Transmit | |
| 2-Digit Add-On Code | Disabled | |
| 5-Digit Add-On Code | Disabled | |
| Add-On Code | Not required | |
| Transmit Preamble Character | System character | |
| Interleaved 2 of 5 | | |
| Interleaved 2 of 5 | Enabled | |
| Check Digit Verification | Enabled | |
| Check Digit | Do not transmit | |
| Minimum Length | 6 | No less than 3 (including check digit) |
| Maximum Length | 100 | |
| ITF-6 | | |
| ITF-6 | Decode as I25 | |
| Check Digit | Transmit | |
| ITF-14 | | |
| ITF-14 | Decode as I25 | |
| Check Digit | Transmit | |
| Deutsche 14 | | |
| Deutsche 14 | Decode as I25 | |
| Check Digit | Transmit | |
| Deutsche 12 | | |
| Deutsche 12 | Decode as I25 | |
| Check Digit | Transmit | |

| Parameter | Factory Default | Remark |
|--------------------------|-----------------|--|
| Matrix 2 of 5 | | |
| Matrix 2 of 5 | Enabled | |
| Check Digit Verification | Disabled | |
| Check Digit | Do not transmit | |
| Minimum Length | 6 | No less than 2 (including check digit) |
| Maximum Length | 80 | |
| Industrial 25 | | |
| Industrial 25 | Enabled | |
| Check Digit Verification | Disabled | |
| Check Digit | Do not transmit | |
| Minimum Length | 6 | No less than 2 (including check digit) |
| Maximum Length | 80 | |
| Standard 25 | | |
| Standard 25 | Enabled | |
| Check Digit Verification | Disabled | |
| Check Digit | Do not transmit | |
| Minimum Length | 6 | No less than 2 (including check digit) |
| Maximum Length | 80 | |
| Code 39 | | |
| Code 39 | Enabled | |
| Check Digit Verification | Disabled | |
| Check Digit | Do not transmit | |
| Start/Stop Characters | Do not transmit | |
| Code 39 Full ASCII | Enabled | |
| Minimum Length | 4 | No less than 2 (including check digit) |
| Maximum Length | 50 | |

| Parameter | Factory Default | Remark |
|-----------------------------|------------------------|--|
| Codabar | | |
| Codabar | Enabled | |
| Check Digit Verification | Disabled | |
| Check Digit | Do not transmit | |
| Start/Stop Characters | Transmit | |
| Start/Stop Character Format | ABCD/ABCD | |
| Minimum Length | 4 | No less than 1 (including check digit) |
| Maximum Length | 60 | |
| Code 93 | | |
| Code 93 | Enabled | |
| Check Digit Verification | Enabled | |
| Check Digit | Do not transmit | |
| Minimum Length | 2 | No less than 1 (including check digit) |
| Maximum Length | 80 | |
| Code 11 | | |
| Code 11 | Disabled | |
| Check Digit Verification | One check digit, MOD11 | |
| Check Digit | Do not transmit | |
| Minimum Length | 4 | No less than 2 (including check digit) |
| Maximum Length | 80 | |
| Plessey | | |
| Plessey | Disabled | |
| Check Digit Verification | Enabled | |
| Check Digit | Do not transmit | |
| Minimum Length | 4 | No less than 3 (including check digit) |
| Maximum Length | 60 | |

| Parameter | Factory Default | Remark |
|-----------------------------|------------------------|--|
| <i>MSI-Plessey</i> | | |
| MSI-Plessey | Disabled | |
| Check Digit Verification | One check digit, MOD10 | |
| Check Digit | Do not transmit | |
| Minimum Length | 4 | No less than 2 (including check digit) |
| Maximum Length | 60 | |
| <i>RSS-14</i> | | |
| RSS-14 | Enabled | |
| AI (Application Identifier) | Transmit | |
| <i>RSS-Limited</i> | | |
| RSS-Limited | Enabled | |
| AI (Application Identifier) | Transmit | |
| <i>RSS-Expand</i> | | |
| RSS-Expand | Enabled | |

AIM ID Table

| Symbology | AIM ID | Remark |
|----------------------------|---------------|---|
| Code 128 |]C0 | Standard Code 128 |
| UCC/EAN 128 (GS1-128) |]C1 | FNC1 is the character right after the start character |
| AIM 128 |]C2 | FNC1 is the 2nd character after the start character |
| EAN-8 |]E4 | Standard EAN-8 |
| |]E4....]E1... | EAN-8 + 2-Digit Add-On Code |
| |]E4....]E2... | EAN-8 + 5-Digit Add-On Code |
| EAN-13 |]E0 | Standard EAN-13 |
| |]E3 | EAN-13 + 2/5-Digit Add-On Code |
| ISSN |]X5 | |
| ISBN |]X4 | |
| UPC-E |]E0 | Standard UPC-E |
| |]E3 | UPC-E + 2/5-Digit Add-On Code |
| UPC-A |]E0 | Standard UPC-A |
| |]E3 | UPC-A + 2/5-Digit Add-On Code |
| Interleaved 2 of 5 |]I0 | No check digit verification |
| |]I1 | Transmit check digit after verification |
| |]I3 | Do not transmit check digit after verification |
| ITF-6 |]I1 | Transmit check digit |
| |]I3 | Do not transmit check digit |
| ITF-14 |]I1 | Transmit check digit |
| |]I3 | Do not transmit check digit |
| Deutsche 14 Deutsche 12 |]X0 | |
| Matrix 2 of 5 |]X1 | No check digit verification |
| |]X2 | Transmit check digit after verification |
| |]X3 | Do not transmit check digit after verification |
| Industrial 25 |]S0 | Not specified |
| Standard 25 |]R0 | No check digit verification |
| |]R8 | One check digit, MOD 7; do not transmit check digit |
| |]R9 | One check digit, MOD 7; transmit check digit |

| Symbology | AIM ID | Remark |
|-------------------------------------|--------|---|
| Code 39 |]A0 | Transmit barcodes as is; Full ASCII disabled; no check digit verification |
| |]A1 | One check digit, MOD 43; transmit check digit |
| |]A3 | One check digit, MOD 43; do not transmit check digit |
| |]A4 | Full ASCII enabled; no check digit verification |
| |]A5 | Full ASCII enabled; MOD43; transmit check digit |
| |]A7 | Full ASCII enabled; MOD43; do not transmit check digit |
| Codabar |]F0 | Standard Codabar |
| |]F1 | ABC Codabar |
| |]F2 | Transmit check digit after verification |
| |]F4 | Do not transmit check digit after verification |
| Code 93 |]G0 | Not specified |
| Code 11 |]H0 | One check digit, MOD11; transmit check digit |
| |]H1 | Two check digits, MOD11/MOD11; transmit check digit |
| |]H3 | Do not transmit check digit after verification |
| |]H8 | Two check digits, MOD11/MOD9; transmit check digit |
| |]H9 | No check digit verification |
| Plessey |]P0 | Not specified |
| MSI Plessey |]M0 | One check digit, MOD10; transmit check digit |
| |]M1 | One check digit, MOD10; do not transmit check digit |
| |]M7 | Two check digits, MOD10 /MOD11; do not transmit check digit |
| |]M8 | Two check digits, MOD10 /MOD11; transmit check digit |
| |]M9 | No check digit verification |
| RSS-14 RSS-Limited RSS-Expand |]e0 | Standard |
| |]e1 | User-defined |
| |]e2 | User-defined |
| |]e3 | User-defined |

Reference: ISO/IEC 15424:2008 Information technology – Automatic identification and data capture techniques – Data Carrier Identifiers (including Symbology Identifiers)

Code ID Table

| Symbology | Code ID |
|---------------------------------------|---------|
| Code 128 | j |
| UCC/EAN-128 | u |
| AIM 128 | f |
| SETTING 128 | t |
| EAN-8 | g |
| EAN-13 | d |
| ISSN | n |
| ISBN | B |
| UPC-E | h |
| UPC-A | c |
| Interleaved 2 of 5 | e |
| ITF-6 | r |
| ITF-14 | q |
| Deutsche 14 | w |
| Deutsche 12 | l |
| Matrix 2 of 5(European Matrix 2 of 5) | v |
| Industrial 25 | i |
| Standard 25 | s |
| Code 39 | b |
| Codabar | a |
| Code 93 | y |
| Code 11 | z |
| Plessey | p |
| MSI-Plessey | m |
| RSS-14 | D |
| RSS-Limited | C |
| RSS-Expand | R |

ASCII Table

| Hex | Dec | Char |
|-----|-----|-------------------------------|
| 00 | 0 | NUL (Null char.) |
| 01 | 1 | SOH (Start of Header) |
| 02 | 2 | STX (Start of Text) |
| 03 | 3 | ETX (End of Text) |
| 04 | 4 | EOT (End of Transmission) |
| 05 | 5 | ENQ (Enquiry) |
| 06 | 6 | ACK (Acknowledgment) |
| 07 | 7 | BEL (Bell) |
| 08 | 8 | BS (Backspace) |
| 09 | 9 | HT (Horizontal Tab) |
| 0a | 10 | LF (Line Feed) |
| 0b | 11 | VT (Vertical Tab) |
| 0c | 12 | FF (Form Feed) |
| 0d | 13 | CR (Carriage Return) |
| 0e | 14 | SO (Shift Out) |
| 0f | 15 | SI (Shift In) |
| 10 | 16 | DLE (Data Link Escape) |
| 11 | 17 | DC1 (XON) (Device Control 1) |
| 12 | 18 | DC2 (Device Control 2) |
| 13 | 19 | DC3 (XOFF) (Device Control 3) |
| 14 | 20 | DC4 (Device Control 4) |
| 15 | 21 | NAK (Negative Acknowledgment) |
| 16 | 22 | SYN (Synchronous Idle) |
| 17 | 23 | ETB (End of Trans. Block) |
| 18 | 24 | CAN (Cancel) |
| 19 | 25 | EM (End of Medium) |
| 1a | 26 | SUB (Substitute) |
| 1b | 27 | ESC (Escape) |
| 1c | 28 | FS (File Separator) |
| 1d | 29 | GS (Group Separator) |

| Hex | Dec | Char |
|-----|-----|---------------------------------|
| 1e | 30 | RS (Request to Send) |
| 1f | 31 | US (Unit Separator) |
| 20 | 32 | SP (Space) |
| 21 | 33 | ! (Exclamation Mark) |
| 22 | 34 | " (Double Quote) |
| 23 | 35 | # (Number Sign) |
| 24 | 36 | \$ (Dollar Sign) |
| 25 | 37 | % (Percent) |
| 26 | 38 | & (Ampersand) |
| 27 | 39 | ` (Single Quote) |
| 28 | 40 | ((Right / Closing Parenthesis) |
| 29 | 41 |) (Right / Closing Parenthesis) |
| 2a | 42 | * (Asterisk) |
| 2b | 43 | + (Plus) |
| 2c | 44 | , (Comma) |
| 2d | 45 | - (Minus / Dash) |
| 2e | 46 | . (Dot) |
| 2f | 47 | / (Forward Slash) |
| 30 | 48 | 0 |
| 31 | 49 | 1 |
| 32 | 50 | 2 |
| 33 | 51 | 3 |
| 34 | 52 | 4 |
| 35 | 53 | 5 |
| 36 | 54 | 6 |
| 37 | 55 | 7 |
| 38 | 56 | 8 |
| 39 | 57 | 9 |
| 3a | 58 | : (Colon) |
| 3b | 59 | ; (Semi-colon) |
| 3c | 60 | < (Less Than) |
| 3d | 61 | = (Equal Sign) |

| Hex | Dec | Char |
|-----|-----|-----------------------------|
| 3e | 62 | > (Greater Than) |
| 3f | 63 | ? (Question Mark) |
| 40 | 64 | @ (AT Symbol) |
| 41 | 65 | A |
| 42 | 66 | B |
| 43 | 67 | C |
| 44 | 68 | D |
| 45 | 69 | E |
| 46 | 70 | F |
| 47 | 71 | G |
| 48 | 72 | H |
| 49 | 73 | I |
| 4a | 74 | J |
| 4b | 75 | K |
| 4c | 76 | L |
| 4d | 77 | M |
| 4e | 78 | N |
| 4f | 79 | O |
| 50 | 80 | P |
| 51 | 81 | Q |
| 52 | 82 | R |
| 53 | 83 | S |
| 54 | 84 | T |
| 55 | 85 | U |
| 56 | 86 | V |
| 57 | 87 | W |
| 58 | 88 | X |
| 59 | 89 | Y |
| 5a | 90 | Z |
| 5b | 91 | [(Left / Opening Bracket) |
| 5c | 92 | \ (Back Slash) |
| 5d | 93 |] (Right / Closing Bracket) |

| Hex | Dec | Char |
|-----|-----|-------------------------|
| 5e | 94 | ^ (Caret / Circumflex) |
| 5f | 95 | _ (Underscore) |
| 60 | 96 | ' (Grave Accent) |
| 61 | 97 | A |
| 62 | 98 | B |
| 63 | 99 | C |
| 64 | 100 | d |
| 65 | 101 | e |
| 66 | 102 | f |
| 67 | 103 | g |
| 68 | 104 | h |
| 69 | 105 | i |
| 6a | 106 | j |
| 6b | 107 | k |
| 6c | 108 | l |
| 6d | 109 | m |
| 6e | 110 | n |
| 6f | 111 | o |
| 70 | 112 | p |
| 71 | 113 | q |
| 72 | 114 | r |
| 73 | 115 | s |
| 74 | 116 | t |
| 75 | 117 | u |
| 76 | 118 | v |
| 77 | 119 | w |
| 78 | 120 | x |
| 79 | 121 | y |
| 7a | 122 | z |
| 7b | 123 | { (Left/ Opening Brace) |
| 7c | 124 | (Vertical Bar) |
| 7d | 125 | } (Right/Closing Brace) |
| 7e | 126 | ~ (Tilde) |
| 7f | 127 | DEL (Delete) |

Digit Barcodes

0 ~ 5



6~ 9



D000006

6



D000007

7



D000008

8



D000009

9

A ~ F



D00000A

A



D00000B

B



D00000C

C



D00000D

D



D00000E

E



D00000F

F

Save/Cancel Barcodes

After reading numeric barcode(s), you need to scan the **Save** barcode to save the data. If you scan the wrong digit(s), you can either scan the **Cancel the Last Digit** barcode and then the correct digit, or scan the **Cancel All Digits** barcode and then the digits you want.

For instance, after reading the **Decode Session Timeout** barcode and numeric barcodes “1”, “2” and “3”, you scan:

Cancel the Last Digit: The last digit “3” will be removed.

Cancel All Digits: All digits “123” will be removed.



D 0 0 0 0 1 2

Save



D 0 0 0 0 1 0

Cancel the Last Digit



D 0 0 0 0 1 1

Cancel All Digits

F1~F12

When the USB HID-KBW feature is enabled, scanning one of the following barcodes will send the corresponding function key.

F1~F6



F000000

F1



F000001

F2



F000002

F3



F000003

F4



F000004

F5



F000005

F6

F7~F12



F000006

F7



F000007

F8



F000008

F9



F000009

F10



F00000A

F11



F00000B

F12



Newland EMEA

+31 (0) 345 87 00 33

info@newland-id.com

Newland D-A-CH

+49 (0) 6182 82916-16

info@newland-id.de

Newland UK

+44 (0) 1442 212 020

sales@newland-id.co.uk

Newland Nordic

+46 (0) 708 847 767

nordic@newland-id.com

Newland Ibérica

+34 (0) 93 303 74 66

info@newland-id.es

Newland France

+31 (0) 345 87 00 33

france@newland-id.com

Newland Middle East

+31 (0) 345 87 00 33

middleeast@newland-id.com

Newland South Africa

+27 (0) 11 553 8010

info@newland-id.co.za

Newland Italy

+39 (0) 342 056 2227

italy@newland-id.com

Newland Russia

+31 (0) 345 87 00 33

russia@newland-id.com

Newland Turkey & Iran

+90 (0) 544 538 40 49

turkey@newland-id.com

iran@newland-id.com