

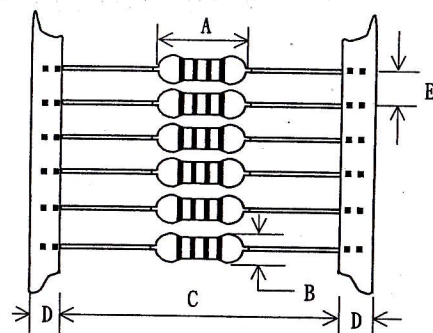
REVISION: A

REV

DESCRIPTION

APPR

DATE

RoHS compliance

Mechanical:(mm)

A:Max 7.50

B:Max 3.00

C:53 +3/ -2

D:6.0 ± 1.00

E:5.0 ± 0.50

Materials:

1. Core:FE-0251-166(TVM-00005)

2. Pins:PW-0177-188(TVM-00102)

3. WIRE:CW-0367-102(TVM-00069)

4. Coating Epoxy:CO-0043-163(TVM-00275)

5. Color Code Epoxy:CO-0043-163(TVM-00086/87/89)

6. SOLDER:SB-0007-155

7. FLUX:CO-0088-232

8. Carton

Reports:

SGS NO:GZSCR051191734/LP

SGS NO:GZ0605075373/CHEM

SGS NO:CE/2006/16671

SGS NO:GZ0605075892/CHEM

SGS NO:GZSCR051298633/LP

SGS NO:GZ0603032239/CHEM

SGS NO:EC401389502

SGS NO:GLHG0051104795CM

Net Weight:0.18g/Pcs

Schematic:



東莞高瞻電子元件制品有限公司

參考文件

東莞高瞻電子元件制品有限公司

受控文件副本

Tested Instrument:

☐ Transformer Auto Tester CH-3200A☐ Withstand Voltage Tester 9605☒ Current Meter CH-301A☐ LCZ Meter CH-1061☒ Q Meter HM2801A☒ L-SRF HM2770A

Electrical Characteristic:

1. Tested Condition:7.96MHz

2. Inductance:10uH±10%

3. DCR:Max 0.72Ω

4. Q:MIN 40

5. SRF:MIN 22MHz

6. RATED DC CURRENT:Max 370mA

Temp:-20℃ ~ +80℃

Others:NO

Approval By Customer

Control Document Specify

東莞高瞻電子元件制品有限公司

受控正本

DCC

DONGGUAN TOP-VIEW ELECTRONICS
COMPONENTS LTD

Tel:0769-83913778 Fax:0769-83915551

TOP-VIEW P/N: EC-EC24-100K-TB-TC-N

TOP-VIEW ISSUE NO: TV-CE-SS-03515

TOP-VIEW Test Report No:

SZHH00368141

CUSTOMER P/N:

LINEAR UNIT mm

GENERAL TOLERANCE

GENERAL RAD/FILLET R0.20

ANGULAR UNIT DEGREE

GENERAL TOLERANCE ±1/2°

GENERAL DRAFT 1° MAX

DESIGN

DRAW

CHECK

APPROVED

/ /

03/07/30

03/07/30

03/07/30

SHEET 1 OF 1 SHEET SIZE A4